U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

ELEVATION CERTIFICATE

IMPORTANT: MUST FOI	LOW THE INSTRUCTIONS (ON INSTRUCTION PAGES 1-11
---------------------	------------------------	---------------------------

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
A1. Building Owner's Name: Anatoliy & Taya Gorbun	Policy Number:
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 1721 Shell Drive	Company NAIC Number:
City: Englewood State: FL 2	ZIP Code: 34223
A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel Num Lot 11 & East 1/2 of Lot 10/Block C/Manasota-By-The-Sea Sarasota Tax Parcel I	
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.): Residential	
A5. Latitude/Longitude: Lat. 27°00'57" Long82°24'06" Horiz. Datum:	NAD 1927 🛛 NAD 1983 🗌 WGS 84
A6. Attach at least two and when possible four clear color photographs (one for each side) of the bu	ilding (see Form pages 7 and 8).
A7. Building Diagram Number:1B	
A8. For a building with a crawlspace or enclosure(s):	
a) Square footage of crawlspace or enclosure(s): N/A sq. ft.	
b) Is there at least one permanent flood opening on two different sides of each enclosed area?	Yes No XI/A
c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot a Non-engineered flood openings: <u>N/A</u> Engineered flood openings: <u>N/A</u>	above adjacent grade:
d) Total net open area of non-engineered flood openings in A8.c: <u>N/A</u> sq. in.	
e) Total rated area of engineered flood openings in A8.c (attach documentation - see Instruction	ns): N/A sq. ft.
f) Sum of A8.d and A8.e rated area (if applicable – see Instructions): N/A sq. ft.	
A9. For a building with an attached garage:	
a) Square footage of attached garage: 400 sq. ft.	
b) Is there at least one permanent flood opening on two different sides of the attached garage?	Yes No N/A
c) Enter number of permanent flood openings in the attached garage within 1.0 foot above adjact Non-engineered flood openings: <u>N/A</u> Engineered flood openings: <u>4</u>	cent grade:
d) Total net open area of non-engineered flood openings in A9.c:N/A sq. in.	
e) Total rated area of engineered flood openings in A9.c (attach documentation - see Instruction	ns): 800 sq. ft.
f) Sum of A9.d and A9.e rated area (if applicable – see Instructions):N/A sq. ft.	
SECTION B – FLOOD INSURANCE RATE MAP (FIRM) INFOR	MATION
B1.a. NFIP Community Name: Sarasota County B1.b. NFIP Comm	nunity Identification Number: 125144
B2. County Name: Sarasota B3. State: FL B4. Map/Panel No.: 12	2115C0344 B5. Suffix: F
B6. FIRM Index Date: 11/04/2016 B7. FIRM Panel Effective/Revised Date: 11/04/201	16
B8. Flood Zone(s): AE B9. Base Flood Elevation(s) (BFE) (Zone AO, use B	ase Flood Depth): 11'
B10. Indicate the source of the BFE data or Base Flood Depth entered in Item B9:	a an an an Arthread an
B11. Indicate elevation datum used for BFE in Item B9: SGVD 1929 XAVD 1988 Other/S	Source:
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protection Designation Date:	cted Area (OPA)? 🗌 Yes 🛛 No
B13. Is the building located seaward of the Limit of Moderate Wave Action (LiMWA)?	No

FEMA Form FF-206-FY-22-152 (formerly 086-0-33) (8/23)

ELEVATION CERTIFICATE IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTIO	N PAGE	S 1-1	1		1	
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 1721 Shell Drive				ECC	MPANY USE	
City: Englewood State: FL ZIP Code: 34223 Policy Number: City: Englewood State: FL ZIP Code: 34223 Company NAIC Number:						
SECTION C – BUILDING ELEVATION INFORMATION (SURVEY	REQU	IRED)			
C1. Building elevations are based on: Construction Drawings* Building Under Construct *A new Elevation Certificate will be required when construction of the building is complete.	ction* [>	Fini	ished	Const	truction	
C2. Elevations – Zones A1–A30, AE, AH, AO, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/A A99. Complete Items C2.a–h below according to the Building Diagram specified in Item A7. In Benchmark Utilized: NGS PID # AG7846 Vertical Datum: NAVD 1988						
Indicate elevation datum used for the elevations in items a) through h) below.					# =	
Datum used for building elevations must be the same as that used for the BFE. Conversion factor	used?	□ `	Yes		lo	
If Yes, describe the source of the conversion factor in the Section D Comments area.	10.0				surement used:	
a) Top of bottom floor (including basement, crawlspace, or enclosure floor):	12.0	_	feet	_	neters	
b) Top of the next higher floor (see Instructions):	N/A	_	feet	_	neters	
c) Bottom of the lowest horizontal structural member (see Instructions):	N/A		feet	_	neters	
d) Attached garage (top of slab):	10.5	\boxtimes	feet		neters	
 e) Lowest elevation of Machinery and Equipment (M&E) servicing the building (describe type of M&E and location in Section D Comments area): 	12.6	\boxtimes	feet	🗌 r	meters	
f) Lowest Adjacent Grade (LAG) next to building: Natural X Finished	10.4	\boxtimes	feet	🗌 r	neters	
g) Highest Adjacent Grade (HAG) next to building: 🗌 Natural 🔀 Finished	10.9	\boxtimes	feet	🗌 r	neters	
 Finished LAG at lowest elevation of attached deck or stairs, including structural support: 	10.7	\boxtimes	feet	🗌 r	neters	
SECTION D - SURVEYOR, ENGINEER, OR ARCHITECT CER	TIFICA	TION				
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by information. <i>I certify that the information on this Certificate represents my best efforts to interpret th false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.</i>						
Were latitude and longitude in Section A provided by a licensed land surveyor? X Yes No						
Check here if attachments and describe in the Comments area.					,	
Certifier's Name: Joseph E. Trott License Number: #5153			\cap	1	h	
Title: President		E.	0/	1	No.	
Company Name: Meridian Group of South Florida, Inc.		#	Y.	~~		
Address: 493 Barger Drive, Unit A		11	JI.	25	5	
City: Port Charlotte State: FL ZIP Code: 33954		Ĩ	the	in	3	
Telephone: (941) 766-0011 Ext.: Email: mgsf@embarqmail.com 111191033						
Signature: Date: 11/14/2023			Place	Seal	Here	
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.						
Comments (including source of conversion factor in C2; type of equipment and location per C2.e; and description of any attachments): Latitude/Longitude in A5 are derived from https://itouchmap.com/latlong.html. Engineered Flood Vents in item A9c are SmartVent Flood Vents model # 1540-520. Elevation in item C2e refers to an exterior concrete A/C pad along the easterly exterior wall.						

IMPO			I CERTIFICATE	DN PAGES 1-11
Building Street Address (includir 1721 Shell Drive	ng Apt., Unit, Suite, and/or Bldg	g. No.) c	or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
City: Englewood	State:	FL	ZIP Code: 34223	Policy Number: Company NAIC Number:
SECTION			T INFORMATION (SURVE D, AND ZONE A (WITHOU	
For Zones AO, AR/AO, and A (intended to support a Letter of enter meters.	(without BFE), complete Items Map Change request, comple	s E1–E ete Sec	5. For Items E1–E4, use naturations A, B, and C. Check the m	al grade, if available. If the Certificate is neasurement used. In Puerto Rico only,
Building measurements are ba *A new Elevation Certificate wi				tion* Finished Construction
	2.2.a in applicable Building Dia below the natural HAG and the			appropriate boxes to show whether the
 a) Top of bottom floor (inc crawlspace, or enclosu 			feet meter	rs above or below the HAG.
b) Top of bottom floor (inc crawlspace, or enclosu			feet meter	s above or below the LAG.
E2. For Building Diagrams 6–9 next higher floor (C2.b in a Building Diagram) of the b	applicable	ngs prov	vided in Section A Items 8 and	/or 9 (see pages 1–2 of Instructions), the rs □ above or □ below the HAG.
E3. Attached garage (top of sl	ab) is:		feet meter	s above or below the HAG.
E4. Top of platform of machine servicing the building is:	ery and/or equipment		feet meter	s 🔲 above or 🗌 below the HAG.
				accordance with the community's must certify this information in Section G.
SECTION F - PRO	PERTY OWNER (OR OW	NER'S	AUTHORIZED REPRESE	INTATIVE) CERTIFICATION
The property owner or owner's sign here. The statements in S				Zone A (without BFE) or Zone AO must
	and describe in the Comment		and the second	
Property Owner or Owner's Au	thorized Representative Nam	e:	. î	
Address:			Na lata interender del Na No	
City:				ZIP Code:
Telephone:	Ext.: Email: _			
Signature:			Date:	
Comments:	118			
			1	

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS O		N PAGES 1-	11
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route an	d Box No.:	FOR INS	URANCE COMPANY USE
1721 Shell Drive		Policy Nur	nber:
City: Englewood State: FL ZIP Code: 3	4223	Company	NAIC Number:
SECTION G - COMMUNITY INFORMATION (RECOMMENDED FO	OR COMMUN	ITY OFFICIA	L COMPLETION)
The local official who is authorized by law or ordinance to administer the communit Section A, B, C, E, G, or H of this Elevation Certificate. Complete the applicable ite			rdinance can complete
G1. The information in Section C was taken from other documentation that engineer, or architect who is authorized by state law to certify elevation elevation data in the Comments area below.)			
G2.a. A local official completed Section E for a building located in Zone A (wi E5 is completed for a building located in Zone AO.	thout a BFE), Z	one AO, or Zo	one AR/AO, or when item
G2.b. A local official completed Section H for insurance purposes.			
G3. In the Comments area of Section G, the local official describes specific	corrections to t	he information	n in Sections A, B, E and H.
G4. The following information (Items G5–G11) is provided for community flo	odplain manag	ement purpos	es.
G5. Permit Number: G6. Date Permit Issued:			
G7. Date Certificate of Compliance/Occupancy Issued:			
G8. This permit has been issued for: 🗌 New Construction 🗌 Substantial Im	provement		
G9.a. Elevation of as-built lowest floor (including basement) of the building:	feet	meters	Datum:
G9.b. Elevation of bottom of as-built lowest horizontal structural member:	feet	meters	Datum:
G10.a. BFE (or depth in Zone AO) of flooding at the building site:	feet	meters	Datum:
G10.b. Community's minimum elevation (or depth in Zone AO) requirement for the lowest floor or lowest horizontal structural member:	□ feet	- motoro	Deturn
G11. Variance issued? Yes No If yes, attach documentation and de	L	meters	Datum:
The local official who provides information in Section G must sign here. <i>I have corr</i> correct to the best of my knowledge. If applicable, I have also provided specific cor	pleted the infor	mation in Sec	tion G and certify that it is
Local Official's Name: Title	:		
NFIP Community Name:			
Telephone: Ext.: Email:			
Address:			
City:			ode:
Signature: Date:			
Comments (including type of equipment and location, per C2.e; description of any sections A, B, D, E, or H):	attachments; ar	nd corrections	to specific information in
			and Market Hall President

ELEVATION CERTIFICATE

ghi

ELEVATION CERTIFICATE IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGE	GES 1-11
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 1721 Shell Drive	R INSURANCE COMPANY USE
City: Englewood State: FL ZIP.Code: 34223	icy Number: npany NAIC Number:
SECTION H – BUILDING'S FIRST FLOOR HEIGHT INFORMATION FOR (SURVEY NOT REQUIRED) (FOR INSURANCE PURPOSES ON	ALL ZONES
The property owner, owner's authorized representative, or local floodplain management official may com to determine the building's first floor height for insurance purposes. Sections A, B, and I must also be con nearest tenth of a foot (nearest tenth of a meter in Puerto Rico). <i>Reference the Foundation Type Diagr</i> <i>Instructions) and the appropriate Building Diagrams (at the end of Section I Instructions) to comp</i>	npleted. Enter heights to the rams (at the end of Section H
H1. Provide the height of the top of the floor (as indicated in Foundation Type Diagrams) above the Low	est Adjacent Grade (LAG):
a) For Building Diagrams 1A, 1B, 3, and 5–8. Top of bottom feet me floor (include above-grade floors only for buildings with crawlspaces or enclosure floors) is:	ters 🔲 above the LAG
b) For Building Diagrams 2A, 2B, 4, and 6–9. Top of next figher floor (i.e., the floor above basement, crawlspace, or enclosure floor) is:	ters above the LAG
H2. Is all Machinery and Equipment servicing the building (as listed in Item H2 instructions) elevated to a H2 arrow (shown in the Foundation Type Diagrams at end of Section H instructions) for the appropria	
SECTION I – PROPERTY OWNER (OR OWNER'S AUTHORIZED REPRESENTATI	VE) CERTIFICATION
The property owner or owner's authorized representative who completes Sections A, B, and H must sign A, B, and H are correct to the best of my knowledge. Note: If the local floodplain management official corrindicate in Item G2.b and sign Section G. Check here if attachments are provided (including required photos) and describe each attachment in the Property Owner or Owner's Authorized Representative Name: Address:	npleted Section H, they should
City: State:	ZIP Code:
Telephone: Ext.: Email:	
Signature: Date:	
Comments:	

ELEVATION CERTIFICATE IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11 BUILDING PHOTOGRAPHS

See Instructions for Item A6.

Building Street Address (including Apt., Unit, \$	FOR INSURANCE COMPANY USE			
1721 Shell Drive				Policy Number:
City: Englewood	State:	FL	ZIP Code: 34223	Company NAIC Number:

Instructions: Insert below at least two and when possible four photographs showing each side of the building (for example, may only be able to take front and back pictures of townhouses/rowhouses). Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." Photographs must show the foundation. When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo One

Photo One Caption: Right Front View 09/08/23

<image><caption>

Photo Two Caption: Right Rear View 09/08/23

Clear Photo Two

Clear Photo One

ELEVATION CERTIFICATE IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11 BUILDING PHOTOGRAPHS

Continuation Page

Building Street Address (including Apt., Unit, S	FOR INSURANCE COMPANY USE			
1721 Shell Drive				- Policy Number:
City: Englewood	State:	FL	ZIP Code: 34223	Company NAIC Number:

Insert the third and fourth photographs below. Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo Three

Photo Three Caption: Left Rear View 09/08/23

di,

Clear Photo Three



Photo Four Caption: Left Front View 09/08/23

Clear Photo Four

ELEVATION CERTIFICATE IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11 BUILDING PHOTOGRAPHS

Continuation Page

Building Street Address (including Apt., Unit, Suite, a	FOR INSURANCE COMPANY USE			
1721 Shell Drive			Ser definition of	Policy Number:
City: Englewood	State:	FL	_ ZIP Code: 34223	Company NAIC Number:

Insert the third and fourth photographs below. Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo Three

Photo Three Caption: Vent View 11/14/23

Photo Four

Photo Four Caption:

Clear Photo Four

Clear Photo Three



Most Widely Accepted and Trusted

ICC-ES Evaluation Report

ESR-2074

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

Reissued 02/2023 This report is subject to renewal 02/2025.

DIVISION: 08 00 00—OPENINGS SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.

Copyright [©] 2023 ICC Evaluation Service, LLC. All rights reserved.











www.icc-es.org | (800) 423-6587 | (562) 699-0543

ICC-ES Evaluation Report ESR-2074

DIVISION: 08 00 00—OPENINGS Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT[®] AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code[®] (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code[®] (IRC)
- 2021 and 2018 International Energy Conservation Code[®] (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

 $^{\dagger}\text{The ADIBC}$ is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent[®] units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent[®] FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing

A Subsidiary of the International Code Council®

Reissued February 2023

This report is subject to renewal February 2025.

the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent[®] Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT[®] Stacking Model #1540-511 and FloodVENT[®] Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT[®] Model #1540-510 and SmartVENT[®] Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT[®] Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs described in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT[®] Model #1540-520. It is a Homasote 440 Sound Barrier[®] (ESR-1374) insert with 21 - 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT[®] and FloodVENT[®]:

SmartVENT[®] and FloodVENT[®] are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent[®] FVs must be installed as follows:

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.



- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT[®] Stacking Model #1540-511 and FloodVENT[®] Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT[®] Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent[®] FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent[®] FVs must be installed in accordance with this report, the applicable code and the

manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.

5.2 The Smart Vent[®] FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- **6.1** Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).
- **6.2** Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION


- 7.1 The Smart VENT[®] models and the Flood Vent Sealing Kit described in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 19 MANTUA ROAD MOUNT ROYAL, NEW JERSEY 08061 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE T-MODEL SIZES								
MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)					
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200					
SmartVENT [®]	1540-510	15 ³ /4" X 7 ³ /4"	200					
FloodVENT [®] Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200					
SmartVENT [®] Overhead Door	1540-514	15 ³ /4" X 7 ³ /4"	200					
Wood Wall FloodVENT [®]	1540-570	14" X 8 ³ / ₄ "	200					
Wood Wall FloodVENT [®] Overhead Door	1540-574	14" X 8 ³ / ₄ "	200					
SmartVENT [®] Stacker	1540-511	16" X 16"	400					
FloodVent [®] Stacker	1540-521	16" X 16"	400					

TABLE 1—MODEL SIZES

For SI: 1 inch = 25.4 mm; 1 square foot = m^2

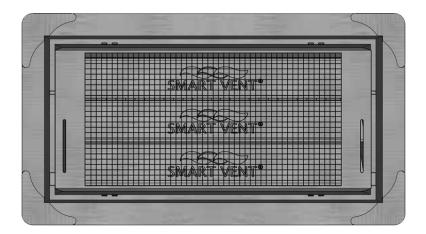

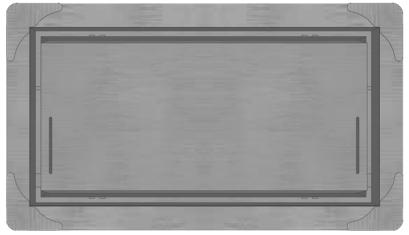


FIGURE 2—SMART VENT MODEL 1540-520



FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

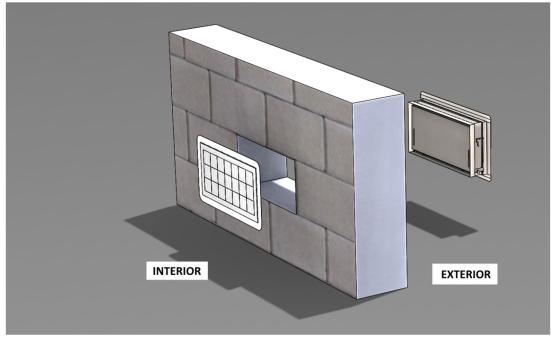


FIGURE 4—FLOOD VENT SEALING KIT



ICC-ES Evaluation Report

ESR-2074 CBC and CRC Supplement

Reissued February 2023 This report is subject to renewal February 2025.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent[®] Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

Applicable code editions:

2019 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Health Planning and Development (OSHPD) AKA: California Department of Health Care Access and Information (HCAI) and the Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

■ 2019 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Smart Vent[®] Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with 2019 CBC Chapter 12, provided the design and installation are in accordance with the 2018 *International Building Code*[®] (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

2.1.1 OSHPD:

The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.

2.1.2 DSA:

The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

2.2 CRC:

The Smart Vent[®] Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the 2019 CRC, provided the design and installation are in accordance with the 2018 *International Residential Code*[®] (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued February 2023.





ICC-ES Evaluation Report

ESR-2074 FBC Supplement

Reissued February 2023 This report is subject to renewal February 2025.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent[®] Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2020 Florida Building Code—Building
- 2020 Florida Building Code—Residential

2.0 CONCLUSIONS

The Smart Vent[®] Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the *Florida Building Code—Building* and the *Florida Building Code—Residential*, provided the design requirements are determined in accordance with the *Florida Building Code—Building* or the *Florida Building Code—Residential*, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-2074 for 2018 *International Building Code*[®] meet the requirements of the *Florida Building Code—Building* or the *Florida Building Code*[®].

Use of the Smart Vent[®] Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the *Florida Building Code—Building* and the *Florida Building Code—Residential*.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued February 2023.

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.

