


## MATERIALS

- (A) FULL PORT BALL VALVE 1/4 TURN (NO PVC)
- (B) HARD COPPER (NO QUICK CONNECT TYPE FITTINGS)
- (C) RESIDENTIAL DUAL CHECK VALVE (ASSE 1024 APPROVED)

## NOTES:

1. MUST MEET THE FLORIDA BUILDING CODE 607.3 THERMAL EXPANSION CONTROL REQUIREMENTS.
2. THE OPTIONAL DUC INSTALLATION USE IS LIMITED TO THE REPLACEMENT OF EXISTING BACKFLOW PREVENTERS. NEW SERVICE INSTALLATION SHALL BE INSTALLED UNDER-GROUND. SEE WATER DWG. NO 13

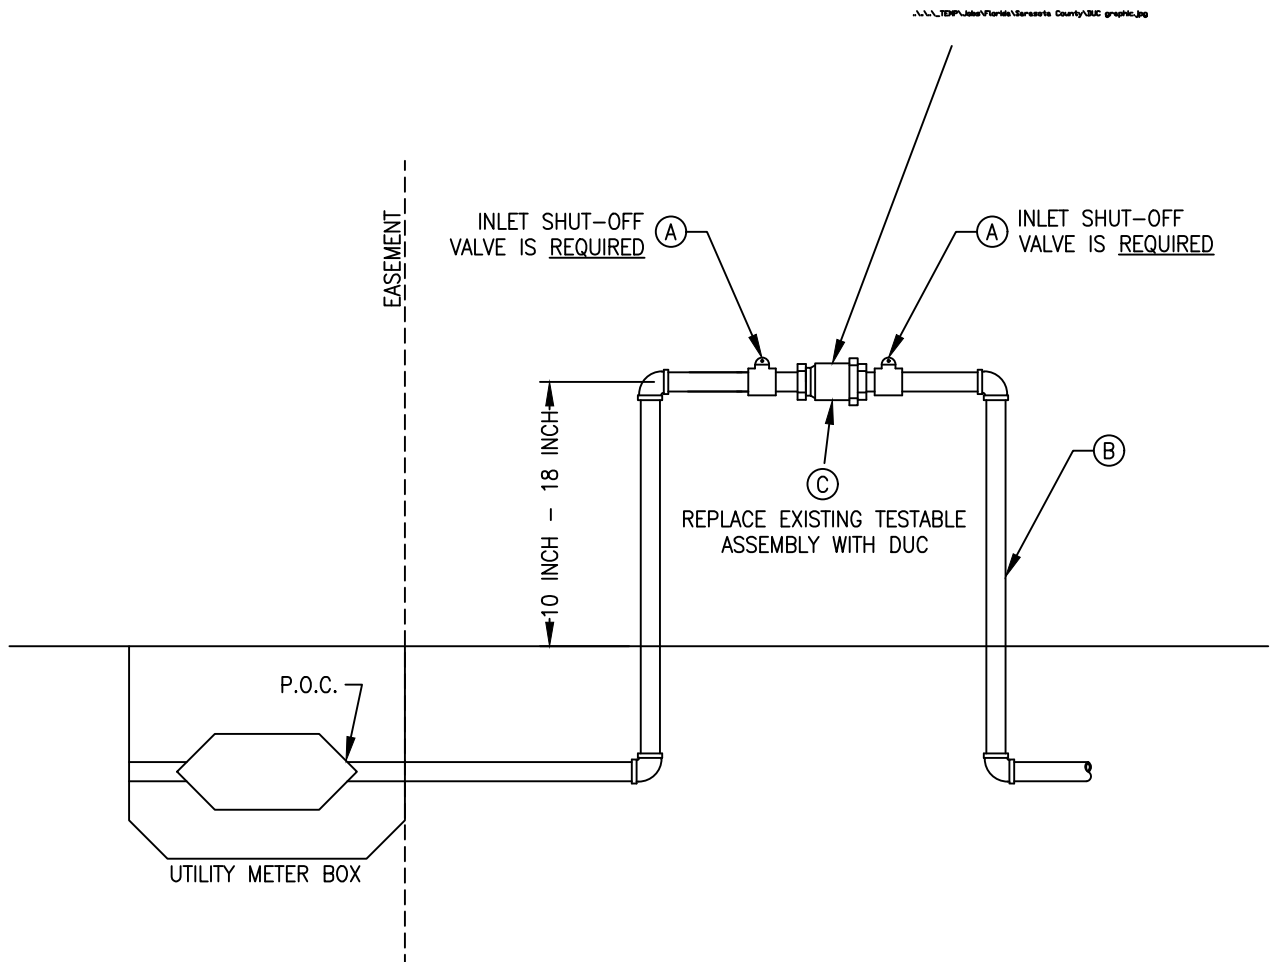

N.T.S.