U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

### ELEVATION CERTIFICATE

### IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19

Oness all an and a fabia Flavohian	Cadificante and all attachments for	(d) a summer with a figure of	(O) inclusion of a second company	and (2) huilding owner
CODV all bades of this Flevation	Certificate and all attachments for		(Z) insurance adeni/combany	and (3) building owner.
oopy an pageo of and clotadon	Certificate and all attachments for			

SECTION A - PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
A1. Building Owner's Name: Brent and Rebeccca Boydston	Policy Number:
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 1730 Stanford LN	Company NAIC Number:
City: Sarasota State: FL State: FL State: FL State: State:S	ZIP Code: <u>34231</u>
A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel Num Lot 12, Aqualane Estates	nber:
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.):Residential	
A5. Latitude/Longitude: Lat. 27.263704 N Long. 82.532542 W Horizontal Datum:	AD 1927 🖾 NAD 1983 🗌 WGS 84
A6. Attach at least two and when possible four clear photographs (one for each side) of the building	(see Form pages 7 and 8).
A7. Building Diagram Number:1B	
A8. For a building with a crawlspace or enclosure(s):	
a) Square footage of crawlspace or enclosure(s): 0.00 sq. ft.	
b) Is there at least one permanent flood opening on two different sides of each enclosed area?	Yes No 🛛 N/A
c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot Non-engineered flood openings:0 Engineered flood openings:0	
d) Total net open area of non-engineered flood openings in A8.c:0.00 sq. in.	
e) Total rated area of engineered flood openings in A8.c (attach documentation - see Instruction	ons):0.00 sq. ft.
f) Sum of A8.d and A8.e rated area (if applicable – see Instructions): 0.00 sq. ft.	
A9. For a building with an attached garage:	
a) Square footage of attached garage: 741.00 sq. ft.	
b) Is there at least one permanent flood opening on two different sides of the attached garage?	? ⊠Yes □ No □ N/A
c) Enter number of permanent flood openings in the attached garage within 1.0 foot above adjate Non-engineered flood openings: 0 Engineered flood openings: 4	acent grade:
d) Total net open area of non-engineered flood openings in A9.c:0.00 sq. in.	
e) Total rated area of engineered flood openings in A9.c (attach documentation - see Instruction	ons): <u>1,000.00</u> sq. ft.
f) Sum of A9.d and A9.e rated area (if applicable – see Instructions):0.00 sq. ft.	
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFOR	RMATION
B1.a. NFIP Community Name: Sarasota County B1.b. NFIP Community Ide	ntification Number: 125144
B2. County Name: Sarasota B3. State: FL B4. Map/Panel No.: 1	12115C0143 B5. Suffix: F
B6. FIRM Index Date: 11/04/2016 B7. FIRM Panel Effective/Revised Date: 11/04/20	016
B8. Flood Zone(s): AE B9. Base Flood Elevation(s) (BFE) (Zone AO, use B	Base Flood Depth): 10
B10. Indicate the source of the BFE data or Base Flood Depth entered in Item B9:	
B11. Indicate elevation datum used for BFE in Item B9: 🔲 NGVD 1929 🕅 NAVD 1988 🔲 Other	/Source:
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Prot Designation Date: CBRS _ OPA	ected Area (OPA)? 🗌 Yes 🔀 No
B13. Is the building located seaward of the Limit of Moderate Wave Action (LiMWA)? Yes X	No

•\_• • .'

ELEVATION CERTIFICATE IMPORTANT: MUST FOLLOW THE INSTRUCTIONS OF	N PAGES 9-19				
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box N 1730 Stanford LN	R INSURANCE COMPANY USE				
City: Sarasota State: FL ZIP Code: 34231		licy Number: mpany NAIC Number:			
SECTION C - BUILDING ELEVATION INFORMATION (S	SURVEY REQU	IRED)			
C1. Building elevations are based on: Construction Drawings* Building Under Construction* Finished Construction *A new Elevation Certificate will be required when construction of the building is complete.					
C2. Elevations – Zones A1–A30, AE, AH, AO, A (with BFE), VE, V1–V30, V (with BFE), A A99. Complete Items C2.a–h below according to the Building Diagram specified in Ite Benchmark Utilized: <u>NGS BM D 701</u> Vertical Datum: <u>12.7</u>	em A7. In Puerto	, AR/A1–A30, AR/AH, AR/AO, Rico only, enter meters.			
Indicate elevation datum used for the elevations in items a) through h) below.					
Datum used for building elevations must be the same as that used for the BFE. Conversion If Yes, describe the source of the conversion factor in the Section D Comments area.	on factor used?	Yes X No Check the measurement used:			
a) Top of bottom floor (including basement, crawlspace, or enclosure floor):	11.29	X feet i meters			
b) Top of the next higher floor (see Instructions):	25.29	🔀 feet 🔲 meters			
c) Bottom of the lowest horizontal structural member (see Instructions):	0.00	🛛 feet 🔲 meters			
d) Attached garage (top of slab):	8.40	🛛 feet 🔲 meters			
<ul> <li>e) Lowest elevation of Machinery and Equipment (M&amp;E) servicing the building (describe type of M&amp;E and location in Section D Comments area):</li> </ul>	11.40	🛛 feet 🗌 meters			
f) Lowest Adjacent Grade (LAG) next to building: 🗌 Natural 🔀 Finished	7.30	🔀 feet 🔲 meters			
g) Highest Adjacent Grade (HAG) next to building: 🗌 Natural 🛛 Finished	7.70	🛛 feet 🔲 meters			
<ul> <li>Finished LAG at lowest elevation of attached deck or stairs, including structural support:</li> </ul>	6.30	🛛 feet 📋 meters			
SECTION D - SURVEYOR, ENGINEER, OR ARCHITE	CT CERTIFICA	TION			
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by state law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.					
Were latitude and longitude in Section A provided by a licensed land surveyor? X Yes	🗌 No				
Check here if attachments and describe in the Comments area.					
Certifier's Name: James B. Burchett License Number: LS5701		BURCL			
Title: President	3. BRTIFICA				
Company Name: Sampey, Burchett and Knight, Inc.		B Bunchett B No. 5701			
Address: 5824 Bee Ridge Rd., Box 243	!'	STATE OF			
City: Sarasota State: FL ZIP Code: 34					
Signature: James B B wetter Date: 08/28/2023					
Telephone: (941) 350-0935       Ext.: Email: james@sbsurvey.com       Place Seal Here					
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.					
Comments (including source of conversion factor in C2; type of equipment and location per C2.e; and description of any attachments): A5 Lat/Long Source www.latlong.net A9.(e) 4 Polycarbonate Plastic, ICS-ES Evaluated Flood Vent Coverage, 250 sq. ft. per vent for a total of 1000 sq. ft. of coverage. C2.(e) A/C unit installed on the left side of residence.					

. .

• ,

ELEVATION CERTIFICATE IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19						
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 1730 Stanford LN	FOR INSURANCE COMPANY USE					
City:     State:     FL     ZIP Code:     34231	Policy Number: Company NAIC Number:					
SECTION E - BUILDING MEASUREMENT INFORMATION (SURVEY FOR ZONE AO, ZONE AR/AO, AND ZONE A (WITHOUT						
For Zones AO, AR/AO, and A (without BFE), complete Items E1–E5. For Items E1–E4, use natural grade, if available. If the Certificate is intended to support a Letter of Map Change request, complete Sections A, B, and C. Check the measurement used. In Puerto Rico only, enter meters.						
Building measurements are based on: Construction Drawings* Building Under Constructi *A new Elevation Certificate will be required when construction of the building is complete.	on*  Finished Construction					
E1. Provide measurements (C.2.a in applicable Building Diagram) for the following and check the measurement is above or below the natural HAG and the LAG.	appropriate boxes to show whether the					
a) Top of bottom floor (including basement, crawlspace, or enclosure) is:	above or 📋 below the HAG.					
b) Top of bottom floor (including basement, crawlspace, or enclosure) is:	above or 📋 below the LAG.					
E2. For Building Diagrams 6–9 with permanent flood openings provided in Section A Items 8 and/o next higher floor (C2.b in applicable Building Diagram) of the building is:						
E3. Attached garage (top of slab) is:	above or 📋 below the HAG.					
E4. Top of platform of machinery and/or equipment servicing the building is:	above or 📋 below the HAG.					
E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in a floodplain management ordinance?	accordance with the community's oust certify this information in Section G.					
SECTION F - PROPERTY OWNER (OR OWNER'S AUTHORIZED REPRESE	NTATIVE) CERTIFICATION					
The property owner or owner's authorized representative who completes Sections A, B, and E for a sign here. The statements in Sections A, B, and E are correct to the best of my knowledge	Zone A (without BFE) or Zone AO must					
Check here if attachments and describe in the Comments area.						
Property Owner or Owner's Authorized Representative Name:						
Address:						
City: State:	ZIP Code:					
Signature: Date:						
Telephone: Ext.: Email:						
Comments:						

. - . .

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON	PAGES 9-19
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 1730 Stanford LN	
City: Sarasota State: FL ZIP Code: 34231	Policy Number:
	Company NAIC Number:
SECTION G - COMMUNITY INFORMATION (RECOMMENDED FOR COMM	AUNITY OFFICIAL COMPLETION)
The local official who is authorized by law or ordinance to administer the community's floodpl Section A, B, C, E, G, or H of this Elevation Certificate. Complete the applicable item(s) and s	ain management ordinance can complete sign below when:
G1. The information in Section C was taken from other documentation that has been a engineer, or architect who is authorized by state law to certify elevation information elevation data in the Comments area below.)	signed and sealed by a licensed surveyor, on. (Indicate the source and date of the
G2.a. A local official completed Section E for a building located in Zone A (without a BF E5 is completed for a building located in Zone AO.	E), Zone AO, or Zone AR/AO, or when item
G2.b. 🔲 A local official completed Section H for insurance purposes.	
G3. In the Comments area of Section G, the local official describes specific correction	s to the information in Sections A, B, E and H.
G4. The following information (Items G5–G11) is provided for community floodplain m	anagement purposes.
G5. Permit Number: G6. Date Permit Issued:	
G7. Date Certificate of Compliance/Occupancy Issued:	
G8. This permit has been issued for: ONE Construction Substantial Improvemer	nt
G9.a. Elevation of as-built lowest floor (including basement) of the	feet meters Datum:
G9.b. Elevation of bottom of as-built lowest horizontal structural	
	feet 🔲 meters Datum:
G10.a. BFE (or depth in Zone AO) of flooding at the building site:	feet 🔲 meters Datum:
G10.b. Community's minimum elevation (or depth in Zone AO) requirement for the lowest floor or lowest horizontal structural member:	feet T meters Datum:
G11. Variance issued? Yes No If yes, attach documentation and describe in t	he Comments area.
The local official who provides information in Section G must sign here. I have completed the correct to the best of my knowledge. If applicable, I have also provided specific corrections in	information in Section G and certify that it is
Local Official's Name: Title:	
NFIP Community Name:	
Telephone: Ext.: Email:	
Address:	
City: State	e: ZIP Code:
Signature: Date:	
Comments (including type of equipment and location, per C2.e; description of any attachmer Sections A, B, D, E, or H):	nts; and corrections to specific information in

**ELEVATION CERTIFICATE** 

. - . .

IM	ELEV/ PORTANT: MUST FOL				ES 9-19	
Building Street Address (including Ap 1730 Stanford LN	t., Unit, Suite, and/or Bld	g. No.) o	r P.O. Route	and Box No.:		SURANCE COMPANY USE
City: Sarasota	State:	FL	ZIP Code:	34231		umber:   y NAIC Number:
	- BUILDING'S FIRST RVEY NOT REQUIRI					ZONES
The property owner, owner's author to determine the building's first floor nearest tenth of a foot (nearest tent <i>Instructions) and the appropriate</i>	height for insurance put h of a meter in Puerto R	irposes. : lico). <b>Re</b> i	Sections A, I ference the	3, and I must also <i>Foundation Typ</i> e	) be complete e <i>Diagrams</i>	ed. Enter heights to the (at the end of Section H
H1. Provide the height of the top of	the floor (as indicated i	n Found	ation Type D	iagrams) above t	he Lowest A	djacent Grade (LAG):
a) For Building Diagrams 1A floor (include above-grade floor subgrade crawlspaces or enclo	s only for buildings with			[] feet		above the LAG
<ul> <li>b) For Building Diagrams 2A higher floor (i.e., the floor abov enclosure floor) is:</li> </ul>				[] feet	meters	above the LAG
H2. Is all Machinery and Equipmer H2 arrow (shown in the Founda Yes D No	nt servicing the building ation Type Diagrams at	(as listed end of S	I in Item H2 ection H inst	instructions) eleva ructions) for the a	ated to or about t	ove the floor indicated by the uilding Diagram?
SECTION I - PROPER	RTY OWNER (OR OW	VNER'S	AUTHORI	ZED REPRESE	NTATIVE)	CERTIFICATION
indicate in Item G2.b and sign Sect Check here if attachments are p Property Owner or Owner's Authori Address:	rovided (including requi		os) and deso	cribe each attachr	ment in the C	comments area.
City:				State:	ZIP	Code:
			5	<b>4</b>		
Signature:			Da	ite:		
Telephone: Comments:	Ext.: Email			·····	······	
Comments.						

÷ .

. .

### ELEVATION CERTIFICATE IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19 BUILDING PHOTOGRAPHS

See Instructions for Item A6.

Building Street Address (including Apt	FOR INSURANCE COMPANY USE			
1730 Stanford LN				- Policy Number:
City: Sarasota	State:	FL	ZIP Code: 34231	Company NAIC Number:

Instructions: Insert below at least two and when possible four photographs showing each side of the building (for example, may only be able to take front and back pictures of townhouses/rowhouses). Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." Photographs must show the foundation. When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo One

Photo One Caption: Front view of residence 08/14/23

5

Clear Photo One

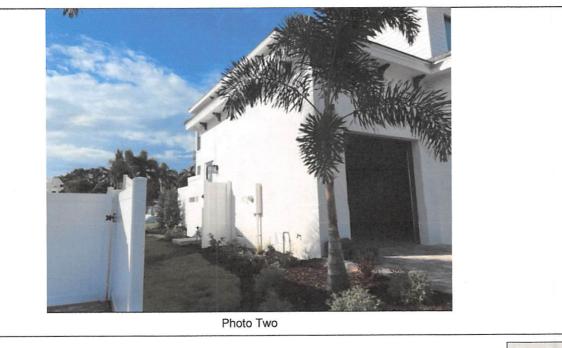


Photo Two Caption: Left side of residence 08/14/23

Clear Photo Two

### ELEVATION CERTIFICATE IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19 BUILDING PHOTOGRAPHS

**Continuation Page** 

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: FOR INSURANCE COMP				
1730 Stanford LN				- Policy Number:
City: Sarasota	State:	FL	_ ZIP Code: 34231	Company NAIC Number:
			·	

Insert the third and fourth photographs below. Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo Three

Photo Three Caption: Right side and rear of residence 08/14/23

Photo Four

Photo Four Caption: Flood vent 08/14/23

Clear Photo Four

**Clear Photo Three** 



# **ICC-ES Evaluation Report**

**ESR-4332** Reissued March 2020 Revised May 2021 This report is subject to renewal March 2022.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

DIVISION: 08 00 00—OPENINGS Section: 08 95 43—Vents / Foundation Flood Vents

#### **REPORT HOLDER:**

SMART PRODUCT INNOVATIONS, INC.

#### **EVALUATION SUBJECT:**

# FREEDOM FLOOD VENT™ AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

#### **1.0 EVALUATION SCOPE**

#### Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code<sup>®</sup> (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code<sup>®</sup> (IRC)

#### **Properties evaluated:**

- Physical operation
- Water flow
- Weathering

#### 2.0 USES

The model FFV–1608 Freedom Flood Vent<sup>™</sup> is used to equalize hydrostatic pressure on walls of enclosures subject to rising or falling floodwaters. With the cover removed, the model FFV-1608 also provides natural air ventilation.

### 3.0 DESCRIPTION

#### 3.1 General:

The model FFV-1608 Freedom Flood Vent<sup>™</sup> is an engineered mechanically operated in-wall flood vent (FV) that automatically allows floodwater to enter an enclosed area and exit. The FV is comprised of a polycarbonate frame with mounting flange and a polycarbonate horizontally pivoting door. When subjected to rising water, the model FFV-1608 Freedom Flood Vent<sup>™</sup> door is activated and pivots to allow water and debris to flow in either direction to equalize hydrostatic pressure from one side of the enclosure to the other. The FV features a removable polycarbonate cover. The FV door will activate and pivot when subjected to rising water with or without the polycarbonate cover installed.

A Subsidiary of the International Code Council®

#### 3.2 Engineered Opening:

The FV complies with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/ SEI 24-14 (2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/ SEI 24, Freedom Flood Vent<sup>™</sup> FVs must be installed in accordance with Section 4.0 below. See Table 1 for vent size and maximum allowable area coverage for a single vent.

#### 4.0 DESIGN AND INSTALLATION

The model FFV-1608 Freedom Flood Vent<sup>™</sup> is designed to be installed into walls or overhead doors of existing or new construction. Installation of the vent must be in accordance with the manufacturer's instructions, the applicable code, and this report. In order to comply with the engineered opening design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/ SEI 24-14 (2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Freedom Flood Vent<sup>™</sup> must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 250 square feet (23.2 m<sup>2</sup>) of enclosed area.
- Below the base flood elevation.
- With the bottom of the vent located a maximum of 12 inches (305.4 mm) above the higher of the final interior grade or floor and the finished exterior grade immediately under each opening.

#### 5.0 CONDITIONS OF USE

The Freedom Flood Vent<sup>™</sup> described in this report complies with, or is a suitable alternative to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The model FFV-1608 Freedom Flood Vent<sup>™</sup> unit must be installed in accordance with this report, the applicable code and the manufacturer's published installation instructions. In the event of a conflict, the instructions in this report shall govern.
- **5.2** The model FFV-1608 Freedom Flood Vent<sup>™</sup> unit must not be used in place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.



5.3 Use of the Freedom Flood Vent as under-floor space ventilation is outside the scope of this report.

#### 6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).

### 7.0 IDENTIFICATION

- 7.1 The Freedom Flood Vent<sup>™</sup> model described in this report must be identified by a label bearing the manufacturer's name (Smart Product Innovations, Inc.) and the evaluation report number (ESR-4332).
- 7.2 The report holder's contact information is the following:

SMART PRODUCT INNOVATIONS, INC. 430 ANDBRO DRIVE, UNIT 1 **PITMAN, NEW JERSEY 08071** (800) 507-1527 www.freedomfloodvent.com info@freedomfloodvent.co

TABLE 1—FREEDOM FLOOD VENT<sup>™</sup>

MODEL NAME	MODEL NUMBER	MODEL SIZE	COVERAGE (sq. ft.)
Freedom Flood Vent™	FFV-1608	15 <sup>3</sup> / <sub>4</sub> " X 8 <sup>1</sup> / <sub>16</sub> "	250
For <b>SI:</b> 1 inch = 25.4 mm			

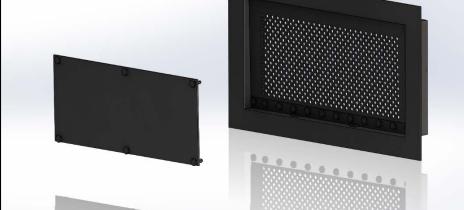


FIGURE 1—MODEL FFV-1608 FREEDOM FLOOD VENT™: SHOWN WITH COVER REMOVED



FIGURE 2—MODEL FFV-1608 FREEDOM FLOOD VENT<sup>™</sup>: SHOWN WITH FLOOD DOOR PIVOTED OPEN



# **ICC-ES Evaluation Report**

# ESR-4332 CBC and CRC Supplement

Reissued March 2020 Revised May 2021 This report is subject to renewal March 2022.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS Section: 08 95 43—Vents / Foundation Flood Vents

#### **REPORT HOLDER:**

SMART PRODUCT INNOVATIONS, INC.

#### **EVALUATION SUBJECT:**

#### FREEDOM FLOOD VENT<sup>™</sup> AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that the Freedom Flood Vent<sup>™</sup> Automatic Foundation Flood Vent: Model FFV-1608, described in ICC-ES evaluation report ESR-4332, has also been evaluated for compliance with codes noted below.

#### Applicable code edition(s):

#### ■ 2019 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Planning and Development (OSHPD) and Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

■ 2019 California Residential Code (CRC)

#### 2.0 CONCLUSIONS

#### 2.1 CBC:

The Freedom Flood Vent<sup>™</sup> Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with CBC Chapter 12 provided the design and installation are in accordance with the 2018 *International Building Code*<sup>®</sup> (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

**2.1.1 OSHPD:** The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.

2.1.2 DSA: The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

#### 2.2 CRC:

The Freedom Flood Vent<sup>™</sup> Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with the 2019 CRC, provided the design and installation are in accordance with the 2018 *International Residential Code*<sup>®</sup> (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued March 2020 and revised May 2021.





# **ICC-ES Evaluation Report**

# **ESR-4332 FBC Supplement**

Reissued March 2020 Revised May 2021 This report is subject to renewal March 2022.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS Section: 08 95 43—Vents / Foundation Flood Vents

#### **REPORT HOLDER:**

SMART PRODUCT INNOVATIONS, INC.

#### **EVALUATION SUBJECT:**

#### FREEDOM FLOOD VENT<sup>™</sup> AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Freedom Flood Vent<sup>™</sup> Automatic Foundation Flood Vent: Model FFV-1608, described in ICC-ES evaluation report ESR-4332, has also been evaluated for compliance with the codes noted below.

#### Applicable code editions:

- 2020 Florida Building Code—Building
- 2020 Florida Building Code—Residential

#### 2.0 CONCLUSIONS

The Freedom Flood Vent<sup>™</sup> Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with the *Florida Building Code—Building* and the *Florida Building Code—Residential*, provided the design requirements are determined in accordance with the *Florida Building Code—Building* and the *Florida Building Code—Building* and the *Florida Building Code—Building Building Code—Building Code—Building Code—Building Building Code—Building Code—Building Building Code—Building Building Code—Building Building Code—Building Building Building Code—Building Building Building Code—Building Building Buildin* 

Use of the Freedom Flood Vent<sup>™</sup> Automatic Foundation Flood Vent: Model FFV-1608 has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the *Florida Building Code—Building* and the *Florida Building Code—Residential*.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official, when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued March 2020 and revised May 2021.

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.

