U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency

National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY IN	FOR INSUI	RANCE COMPANY USE			
A1. Building Owner's Name MICHELE HUBBARD-RICHER, DONALD RICHER, DOROTHY MAE HUBBARD				ber:	
A2. Building Street Address (including Apt., Unit, Suite, at Box No. 912 PANDA RD	Company N	IAIC Number:			
City	State		ZIP Code		
VENICE	Florida		34293		
A3. Property Description (Lot and Block Numbers, Tax Pa LOTS 18904, 18905 & 18906, SOUTH VENICE UNIT 71,			c.)		
A4. Building Use (e.g., Residential, Non-Residential, Addi	ition, Accessory,	etc.) RESIDEN	TIAL		
A5. Latitude/Longitude: Lat. 27.02964° Lon			Datum: NAD 1	927 × NAD 1983	
A6. Attach at least 2 photographs of the building if the Ce.		sed to obtain floor	d insurance.		
A7. Building Diagram Number 1B					
A8. For a building with a crawlspace or enclosure(s):					
		N/A sq ft			
b) Number of permanent flood openings in the crawls			above adjacent gra	ide N/A	
c) Total net area of flood openings in A8.b					
d) Engineered flood openings? Yes X No					
a) Engineered flood openings?					
A9. For a building with an attached garage:					
a) Square footage of attached garage	610 sq ft				
b) Number of permanent flood openings in the attache	ed garage within 1	.0 foot above adja	cent grade 3		
c) Total net area of flood openings in A9.b	750 sq	in			
d) Engineered flood openings? X Yes No					
SECTION B - FLOOD INSU	JRANCE RATE I	MAP (FIRM) INFO	ORMATION		
B1. NFIP Community Name & Community Number	B2. County I			B3. State	
SARASOTA COUNTY - 125144	SARASOTA			Florida	
Number Date	FIRM Panel Effective/ Revised Date	B8. Flood Zone(s)	B9. Base Flood El (Zone AO, use	evation(s) Base Flood Depth)	
	04-2016	AE	11'		
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:					
FIS Profile X FIRM Community Determined Other/Source:					
B11. Indicate elevation datum used for BFE in Item 89: NGVD 1929 NAVD 1988 Other/Source:					
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? Yes No					
Designation Date: CBRS OPA					

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.			FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 912 PANDA RD			Policy Number:	
2.0		ZIP Code 34293	Company NAIC Number	
SECTION C – BUILDING EL	LEVATION INFOR	MATION (SURVEY R	EQUIRED)	
C1. Building elevations are based on: Construction Drawings* Building Under Construction* X Finished Construction *A new Elevation Certificate will be required when construction of the building is complete. C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/A, AR/AE, AR/A1–A30, AR/AH, AR/AO. Complete Items C2.a—h below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters. Benchmark Utilized: USC&GS #RM50 EL: 13.85' Vertical Datum: NGVD1929				
Indicate elevation datum used for the elevations in in NGVD 1929 ⊠ NAVD 1988 ☐ Other/	/Source:			
a) Top of bottom floor (including basement, crawls b) Top of the next higher floor c) Bottom of the lowest horizontal structural member d) Attached garage (top of slab) e) Lowest elevation of machinery or equipment ser (Describe type of equipment and location in Conf. Lowest adjacent (finished) grade next to building g) Highest adjacent (finished) grade next to building h) Lowest adjacent grade at lowest elevation of destructural support SECTION D - SURVEYOR This certification is to be signed and sealed by a land su I certify that the information on this Certificate represents statement may be punishable by fine or imprisonment un Were latitude and longitude in Section A provided by a lie	pace, or enclosure for (V Zones only) rvicing the building naments) g (LAG) g (HAG) ck or stairs, including the stairs and stairs are stairs.	ARCHITECT CERTIFI architect authorized by interpret the data availar Section 1001.	law to certify elevation information.	
Certifier's Name B. GREGORY RIETH Title PSM/CFM Company Name BENNETT-PANFIL, INC. Address 742 SHAMROCK BLVD City VENICE	License Number 5228 State Florida	ZIP Code 34293	NO. 5228 * WILLIAM STATE OF OUT LAND	
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner. Comments (including type of equipment and location, per C2(e), if applicable) FILE #20-07-64. THE OUTSIDE A/C UNIT ON THE NORTHEAST SIDE OF THE HOME WAS USED FOR SECTION C2e. SECTION A5 WAS DERIVED FROM LABINS.ORG. ELEVATIONS SHOWN IN SECTION "C" WERE CONVERTED FROM N.G.V.D. 1929 DATUM TO N.A.V.D. 1988 DATUM USING VERTCON CONVERSION PROGRAM. SUBJECT STRUCTURE HAS (4) FLOOD VENTS, ENGINEERED FOR 1000 SQUARE FEET (TOTAL). ATTACHED IS ICC-ES EVALUATION REPORT ESR-4332.				
DATE OF FIELD SURVEY: 02/24/2023				

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the correspondi	ng information from S	Section A.	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., Unit, Suite, and/or Bldg, No.) or P.O. Route and Box No. 912 PANDA RD			Policy Number:		
1 - 7		P Code 4293	Company NAIC Number		
SECTION E - BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE)					
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B,and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters.					
E1. Provide elevation information for the following and of the highest adjacent grade (HAG) and the lowest adjacent grade (HAG) and the lowest adjacent grade (HAG) and the lowest adjacent grade (HAG).	theck the appropriate bidjacent grade (LAG).	oxes to show whethe	r the elevation is above or below		
a) Top of bottom floor (including basement, crawlspace, or enclosure) is b) Top of bottom floor (including basement,		feet _ meter	s above or below the HAG.		
crawlspace, or enclosure) is		feet _ meter			
E2. For Building Diagrams 6–9 with permanent flood op the next higher floor (elevation C2.b in the diagrams) of the building is	enings provided in Sec	tion A Items 8 and/or [feet meter			
E3. Attached garage (top of slab) is			s above or below the HAG.		
E4. Top of platform of machinery and/or equipment servicing the building is		feet meter	s above or below the HAG.		
E5. Zone AO only: If no flood depth number is available floodplain management ordinance? Yes			cordance with the community's certify this information in Section G.		
SECTION F - PROPERTY OWN	ER (OR OWNER'S RE	PRESENTATIVE) CE	RTIFICATION		
The property owner or owner's authorized representative community-issued BFE) or Zone AO must sign here. The	who completes Sections statements in Section	ns A, B, and E for Zor s A, B, and E are corr	ne A (without a FEMA-issued or ect to the best of my knowledge.		
Property Owner or Owner's Authorized Representative's	Name				
Address	City	Sta	te ZIP Code		
Signature	Date	Tel	ephone		
Comments					
			Check here if attachments.		

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corr	FOR INSURANCE COMPANY USE					
Building Street Address (including Apt., Unit, S 912 PANDA RD	Policy Number:					
City VENICE	State Florida	ZIP Code 34293		Company NAIC Number		
SECTION	ON G - COMMUNIT	Y INFORMATION (OPTI	ONAL)			
Sections A, B, C (or E), and G of this Elevation	The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8–G10. In Puerto Rico only, enter meters.					
G1. The information in Section C was tak engineer, or architect who is authoriz data in the Comments area below.)	en from other documed by law to certify e	entation that has been s elevation information. (Ind	igned an ficate the	d sealed by a licensed surveyor, e source and date of the elevation		
G2. A community official completed Section Zone AO.	on E for a building lo	cated in Zone A (without	a FEMA	\-issued or community-issued BFE)		
G3. The following information (Items G4-	G10) is provided for	community floodplain ma	anageme	ent purposes.		
G4. Permit Number 21-125420	G5. Date Permit Is	8/2021		ate Certificate of ompliance/Occupancy Issued		
G7. This permit has been issued for:	New Construction	Substantial Improven	nent			
G8. Elevation of as-built lowest floor (including of the building:	j basement)		feet	meters Datum		
G9. BFE or (in Zone AO) depth of flooding at t	he building site:		feet [meters Datum		
G10. Community's design flood elevation:	_		feet	meters Datum		
Local Official's Name		Title				
Community Name		Telephone				
Signature		Date				
Comments (including type of equipment and loc	ation, per C2(e), if ap	oplicable)		☐ Check here if attachments.		
				_ C.I.O.K. HOTO II deliconiii onioi		

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.			FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 912 PANDA RD			o. Policy Number:
City	State	ZIP Code	Company NAIC Number
VENICE	Florida	34293	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Clear Photo One **Photo One Caption**



Photo Two Caption

Clear Photo Two Form Page 5 of 6

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 912 PANDA RD			FOR INSURANCE COMPANY USE	
			Policy Number:	
City	State	ZIP Code	Company NAIC Number	
VENICE	Florida	34293		

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three Caption

Clear Photo Three



Photo Four Caption

Clear Photo Four



ICC-ES Evaluation Report



ESR-4332

Reissued March 2020 Revised May 2021 This report is subject to renewal March 2022.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents / Foundation Flood Vents

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT™ AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)

Properties evaluated:

- Physical operation
- Water flow
- Weathering

2.0 USES

The model FFV-1608 Freedom Flood Vent™ is used to equalize hydrostatic pressure on walls of enclosures subject to rising or falling floodwaters. With the cover removed, the model FFV-1608 also provides natural air ventilation.

3.0 DESCRIPTION

3.1 General:

The model FFV-1608 Freedom Flood Vent™ is an engineered mechanically operated in-wall flood vent (FV) that automatically allows floodwater to enter an enclosed area and exit. The FV is comprised of a polycarbonate frame with mounting flange and a polycarbonate horizontally pivoting door. When subjected to rising water, the model FFV-1608 Freedom Flood Vent™ door is activated and pivots to allow water and debris to flow in either direction to equalize hydrostatic pressure from one side of the enclosure to the other. The FV features a removable polycarbonate cover. The FV door will activate and pivot when subjected to rising water with or without the polycarbonate cover installed.

3.2 Engineered Opening:

The FV complies with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/ SEI 24-14 (2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/ SEI 24, Freedom Flood Vent™ FVs must be installed in accordance with Section 4.0 below. See Table 1 for vent size and maximum allowable area coverage for a single vent.

4.0 DESIGN AND INSTALLATION

The model FFV-1608 Freedom Flood Vent[™] is designed to be installed into walls or overhead doors of existing or new construction. Installation of the vent must be in accordance with the manufacturer's instructions, the applicable code, and this report. In order to comply with the engineered opening design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/ SEI 24-14 (2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Freedom Flood Vent[™] must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 250 square feet (23.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the vent located a maximum of 12 inches (305.4 mm) above the higher of the final interior grade or floor and the finished exterior grade immediately under each opening.

5.0 CONDITIONS OF USE

The Freedom Flood Vent[™] described in this report complies with, or is a suitable alternative to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The model FFV-1608 Freedom Flood Vent™ unit must be installed in accordance with this report, the applicable code and the manufacturer's published installation instructions. In the event of a conflict, the instructions in this report shall govern.
- 5.2 The model FFV-1608 Freedom Flood Vent™ unit must not be used in place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.



5.3 Use of the Freedom Flood Vent as under-floor space ventilation is outside the scope of this report.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).

7.0 IDENTIFICATION

7.1 The Freedom Flood Vent™ model described in this report must be identified by a label bearing the manufacturer's name (Smart Product Innovations, Inc.) and the evaluation report number (ESR-4332). 7.2 The report holder's contact information is the following:

SMART PRODUCT INNOVATIONS, INC. 430 ANDBRO DRIVE, UNIT 1
PITMAN, NEW JERSEY 08071
(800) 507-1527
www.freedomfloodvent.com
info@freedomfloodvent.co

TABLE 1—FREEDOM FLOOD VENT™

	MODEL NAME	MODEL NUMBER	MODEL SIZE	COVERAGE (sq. ft.)
Ì	Freedom Flood Vent™	FFV-1608	15 ³ / ₄ " × 8 ¹ / ₁₆ "	250

For SI: 1 inch = 25.4 mm

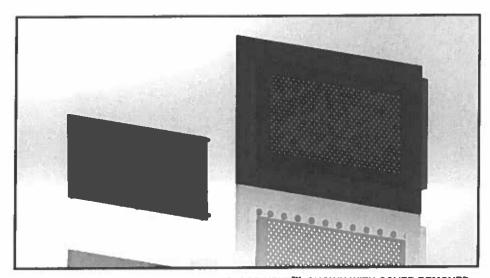


FIGURE 1—MODEL FFV-1608 FREEDOM FLOOD VENT™: SHOWN WITH COVER REMOVED

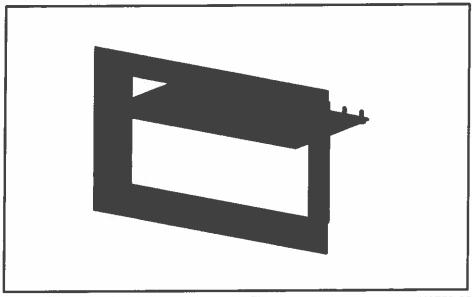


FIGURE 2—MODEL FFV-1608 FREEDOM FLOOD VENT™: SHOWN WITH FLOOD DOOR PIVOTED OPEN



ICC-ES Evaluation Report

ESR-4332 CBC and CRC Supplement

Reissued March 2020 Revised May 2021

This report is subject to renewal March 2022.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents / Foundation Flood Vents

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENTTM AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

1.0 REPORT PURPOSE AND SCOPE

The purpose of this evaluation report supplement is to indicate that the Freedom Flood Vent™ Automatic Foundation Flood Vent: Model FFV-1608, described in ICC-ES evaluation report ESR-4332, has also been evaluated for compliance with codes noted below.

Applicable code edition(s):

■ 2019 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Planning and Development (OSHPD) and Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

■ 2019 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Freedom Flood Vent™ Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with CBC Chapter 12 provided the design and installation are in accordance with the 2018 International Building Code® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

- 2.1.1 OSHPD: The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.
- 2.1.2 DSA; The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

2.2 CRC:

The Freedom Flood Vent™ Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with the 2019 CRC, provided the design and installation are in accordance with the 2018 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued March 2020 and revised May 2021.



Page 3 of 4



ICC-ES Evaluation Report

ESR-4332 FBC Supplement

Reissued March 2020 Revised May 2021 This report is subject to renewal March 2022.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents / Foundation Flood Vents

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT™ AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Freedom Flood Vent Automatic Foundation Flood Vent: Model FFV-1608, described in ICC-ES evaluation report ESR-4332, has also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2020 Florida Building Code—Building
- 2020 Florida Building Code—Residential

2.0 CONCLUSIONS

The Freedom Flood Vent™ Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with the Florida Building Code-Building and the Florida Building Code-Residential, provided the design requirements are determined in accordance with the Florida Building Code—Building and the Florida Building Code—Residential, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-4332 for the 2018 International Building Code® (IBC) meet the requirements of Florida Building Code—Building and the Florida Bullding Code—Residential, as applicable.

Use of the Freedom Flood Vent™ Automatic Foundation Flood Vent: Model FFV-1608 has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code-Building and the Florida Building Code—Residential.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official, when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued March 2020 and revised May 2021.

