

536 Interstate Court Sarasota, FL 34240 Telephone: (941) 341-9935 email:msb@msbsurveying.com

LETTER OF TRANSMITTAL

Date: January 31, 2024 Job No.: 220225 (7)

TO: Sarasota County Building Dept.

Flood Plan Management

ATTENTION: Ember Dunn

PERMIT# 21 155772 00 B1 BUILDER: John Cannon Homes

RE: Casey Cove, Lot 8

AKA: 917 Key Way, Nokomis, FL 34275

Copies	Revision Date	Description	
1		Revised Final Elevation Certificate	
	7 - 1		

We are sending you: Attached: _____ Under Separate Cover: ____ Via: _Deliver

Any questions, please don't hesitate to call.

Sincerely,

Martin S. Britt, PSM

U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB Control No. 1660-0008 Expiration Date: 06/30/2026

ELEVATION CERTIFICATE

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner. FOR INSURANCE COMPANY USE SECTION A - PROPERTY INFORMATION A1. Building Owner's Name: Stephen J Morrison & Amy R Morrison Policy Number: A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: Company NAIC Number: 917 Key Way City: Nokomis FL ZIP Code: 34275 A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel Number: Casey Cove, Lot 8 PID# 0168070012 A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.): Residential A5. Latitude/Longitude: Lat. 27.136911° Long. -82.472003° Horiz. Datum: ☐ NAD 1927 🔀 NAD 1983 ☐ WGS 84 A6. Attach at least two and when possible four clear color photographs (one for each side) of the building (see Form pages 7 and 8). A7. Building Diagram Number: 1B A8. For a building with a crawlspace or enclosure(s): a) Square footage of crawlspace or enclosure(s): N/A sq. ft. b) Is there at least one permanent flood opening on two different sides of each enclosed area? \square Yes \square No \bowtie N/A c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot above adjacent grade: Non-engineered flood openings: N/A Engineered flood openings: d) Total net open area of non-engineered flood openings in A8.c: e) Total rated area of engineered flood openings in A8.c (attach documentation – see Instructions): N/A sq. ft. f) Sum of A8.d and A8.e rated area (if applicable – see Instructions): A9. For a building with an attached garage: a) Square footage of attached garage: 1096.3 sq. ft. b) Is there at least one permanent flood opening on two different sides of the attached garage?

✓ Yes ✓ No ✓ N/A c) Enter number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade: Non-engineered flood openings: 0 Engineered flood openings: d) Total net open area of non-engineered flood openings in A9.c: e) Total rated area of engineered flood openings in A9.c (attach documentation – see Instructions): 1320 sq. ft. f) Sum of A9.d and A9.e rated area (if applicable – see Instructions): SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFORMATION B1.a. NFIP Community Name: Sarasota County B1.b. NFIP Community Identification Number: 125144 B3. State: FL B4. Map/Panel No.: 12115C0238 B2. County Name: Sarasota B5. Suffix: F B6. FIRM Index Date: 11/04/2016 B7. FIRM Panel Effective/Revised Date: 11/04/2016 B8. Flood Zone(s): AE B9. Base Flood Elevation(s) (BFE) (Zone AO, use Base Flood Depth): 10' B10. Indicate the source of the BFE data or Base Flood Depth entered in Item B9: ☐ FIS ☐ FIRM ☐ Community Determined ☐ Other: B11. Indicate elevation datum used for BFE in Item B9: ☐ NGVD 1929 ☒ NAVD 1988 ☐ Other/Source: Designation Date: ☐ CBRS ☐ OPA B13. Is the building located seaward of the Limit of Moderate Wave Action (LiMWA)? ☐ Yes ☒ No

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:	FOR	INSURANCE COMPANY USE		
917 Key Way	Policy	Policy Number:		
City: Nokomis State: FL ZIP Code: 34275	Comp	Company NAIC Number:		
SECTION C - BUILDING ELEVATION INFORMATION (SUR)	EY REQU	IIRED)		
C1. Building elevations are based on: Construction Drawings* Building Under ConstAnew Elevation Certificate will be required when construction of the building is complete.	struction*	Finished Construction		
C2. Elevations – Zones A1–A30, AE, AH, AO, A (with BFE), VE, V1–V30, V (with BFE), AR, Al A99. Complete Items C2.a–h below according to the Building Diagram specified in Item A7 Benchmark Utilized: NGS BM#X 699 Elev.= 4.84' Vertical Datum: NAVD 1	. In Puerto			
Indicate elevation datum used for the elevations in items a) through h) below. ☐ NGVD 1929 ☑ NAVD 1988 ☐ Other:	-temper	Older Telan 2 year -		
Datum used for building elevations must be the same as that used for the BFE. Conversion fac If Yes, describe the source of the conversion factor in the Section D Comments area.	tor used?	Yes No		
a) Top of bottom floor (including basement, crawlspace, or enclosure floor):	11.6	Check the measurement used: feet meters		
b) Top of the next higher floor (see Instructions):	25.3			
c) Bottom of the lowest horizontal structural member (see Instructions):	N/A			
d) Attached garage (top of slab):	6.5			
 e) Lowest elevation of Machinery and Equipment (M&E) servicing the building (describe type of M&E and location in Section D Comments area): 	11.2	☐ feet ☐ meters		
f) Lowest Adjacent Grade (LAG) next to building: Natural Finished	4.5			
g) Highest Adjacent Grade (HAG) next to building: Natural Finished	7.3			
h) Finished LAG at lowest elevation of attached deck or stairs, including structural		Martin Camatana Lat. T		
support:	6.3	feet meters		
SECTION D – SURVEYOR, ENGINEER, OR ARCHITECT C				
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorize information. I certify that the information on this Certificate represents my best efforts to interprefalse statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.	et the data a	aw to certify elevation available. I understand that any		
Were latitude and longitude in Section A provided by a licensed land surveyor? ☐ Yes ☐ N	10			
Check here if attachments and describe in the Comments area.				
Certifier's Name: Martin S Britt License Number: PSM 5538		The same of the sa		
Title: Professional Surveyor & Mapper		W1 - 12 H		
Company Name: MSB Surveying, Inc.		Month of the		
Address: 536 Interstate Court		15.5538		
City: Sarasota State: FL ZIP Code: 34240		The land		
Telephone: (941) 341-9935 Ext.: Email: msb@msbsurveying.com		1/26/2024		
Signature:	4	Place Seal Here		
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insura	nce agent/c	ompany, and (3) building owner.		

Comments (including source of conversion factor in C2; type of equipment and location per C2.e; and description of any attachments): 2 story structure on filled stemwall with attached garage on grade. A5. determined by LABINS website. A9.c) Engineered openings manufactured by Flood Flaps LLC, Model# FFWF08 installed, ICC-ES Evaluation Report ESR-3560, issued Sept. 2023, rated 220sq.in per unit. C2.e) denotes the bottom of elevated AC units located on left side of stucture (See Page 9). NOTE: Page 9 & 10 added for additional photos. 1 Attachment for ICC-ES Evaluation Report ESR-3560.

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

City: Nokomis State: FI 7IP Code: 34275	e, if available. If the Certificate is ement used. In Puerto Rico only, Finished Construction
FOR ZONE AO, ZONE AR/AO, AND ZONE A (WITHOUT BFE) For Zones AO, AR/AO, and A (without BFE), complete Items E1–E5. For Items E1–E4, use natural grade intended to support a Letter of Map Change request, complete Sections A, B, and C. Check the measure enter meters. Building measurements are based on: Construction Drawings* Building Under Construction* *A new Elevation Certificate will be required when construction of the building is complete. E1. Provide measurements (C.2.a in applicable Building Diagram) for the following and check the appromeasurement is above or below the natural HAG and the LAG. a) Top of bottom floor (including basement, crawlspace, or enclosure) is:	e, if available. If the Certificate is ement used. In Puerto Rico only, Finished Construction
intended to support a Letter of Map Change request, complete Sections A, B, and C. Check the measure enter meters. Building measurements are based on: Construction Drawings* Building Under Construction* *A new Elevation Certificate will be required when construction of the building is complete. E1. Provide measurements (C.2.a in applicable Building Diagram) for the following and check the appromeasurement is above or below the natural HAG and the LAG. a) Top of bottom floor (including basement, crawlspace, or enclosure) is:	ement used. In Puerto Rico only, Finished Construction
*A new Elevation Certificate will be required when construction of the building is complete. E1. Provide measurements (C.2.a in applicable Building Diagram) for the following and check the appromeasurement is above or below the natural HAG and the LAG. a) Top of bottom floor (including basement, crawlspace, or enclosure) is:	risies per lucinita institut (1. s. s.)
measurement is above or below the natural HAG and the LAG. a) Top of bottom floor (including basement, crawlspace, or enclosure) is: feet meters	priate boxes to show whether the
crawlspace, or enclosure) is:	
h) Top of bottom floor (including basement	above or below the HAG.
crawlspace, or enclosure) is:	above or below the LAG.
E2. For Building Diagrams 6–9 with permanent flood openings provided in Section A Items 8 and/or 9 (s next higher floor (C2.b in applicable Building Diagram) of the building is:	above or below the HAG.
E3. Attached garage (top of slab) is:	above or below the HAG.
E4. Top of platform of machinery and/or equipment servicing the building is:	above or below the HAG.
E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in accord floodplain management ordinance? Yes No Unknown The local official must ce	dance with the community's ertify this information in Section G.
SECTION F - PROPERTY OWNER (OR OWNER'S AUTHORIZED REPRESENTATION	IVE) CERTIFICATION
The property owner or owner's authorized representative who completes Sections A, B, and E for Zone A sign here. The statements in Sections A, B, and E are correct to the best of my knowledge	A (without BFE) or Zone AO must
Check here if attachments and describe in the Comments area.	
Property Owner or Owner's Authorized Representative Name:	
Address:	Anglater in St. S. S. S. S. S. W. S. L. II. (201
City: State:	ZIP Code:
Telephone: Ext.: Email:	N. D. Community Norw
Signature: Date:	anorthe of
Comments:	

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE					
917 Key Way	Policy Number:					
City: Nokomis State: FL ZIP Code: 34275 Company NAIC Number:						
SECTION G - COMMUNITY INFORMATION (RECOMMENDED FOR COMM	MUNITY OFFICIAL COMPLETION)					
The local official who is authorized by law or ordinance to administer the community's floodple Section A, B, C, E, G, or H of this Elevation Certificate. Complete the applicable item(s) and s	sign below when:					
G1. The information in Section C was taken from other documentation that has been sengineer, or architect who is authorized by state law to certify elevation information elevation data in the Comments area below.)						
G2.a. A local official completed Section E for a building located in Zone A (without a BF E5 is completed for a building located in Zone AO.	E), Zone AO, or Zone AR/AO, or when item					
G2.b. A local official completed Section H for insurance purposes.	and the state of t					
G3. In the Comments area of Section G, the local official describes specific correction	s to the information in Sections A, B, E and H.					
G4. The following information (Items G5–G11) is provided for community floodplain m	anagement purposes.					
G5. Permit Number: G6. Date Permit Issued:	The second secon					
G7. Date Certificate of Compliance/Occupancy Issued:	", aptique applies (), it is applied, protection in the first					
G8. This permit has been issued for: New Construction Substantial Improvemen	t engagement in the contract the second					
G9.a. Elevation of as-built lowest floor (including basement) of the building:	feet meters Datum:					
G9.b. Elevation of bottom of as-built lowest horizontal structural member:	feet meters Datum:					
G10.a. BFE (or depth in Zone AO) of flooding at the building site:	feet meters Datum:					
G10.b. Community's minimum elevation (or depth in Zone AO) requirement for the lowest floor or lowest horizontal structural member:	feet ☐ meters Datum:					
G11. Variance issued? Yes No If yes, attach documentation and describe in the						
The local official who provides information in Section G must sign here. I have completed the correct to the best of my knowledge. If applicable, I have also provided specific corrections in	information in Section G and certify that it is the Comments area of this section.					
Local Official's Name: Title:						
NFIP Community Name:						
Telephone: Ext.: Email:						
Address:						
City: State	: ZIP Code:					
Signature: Date:						
Comments (including type of equipment and location, per C2.e; description of any attachment Sections A, B, D, E, or H):	ts; and corrections to specific information in					

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

Building Street Address (inclu 917 Key Way	ding Apt., Unit, Suite,	and/or Bldg. No.) o	or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
City: Nokomis	7	State: FL	ZIP Code: 34275	Policy Number: Company NAIC Number:
SECTION			R HEIGHT INFORMATION OR INSURANCE PURPOSE	FOR ALL ZONES
to determine the building's fi nearest tenth of a foot (neare	rst floor height for insest tenth of a meter in	urance purposes. n Puerto Rico). <i>Re</i>	Sections A, B, and I must also	ay complete Section H for all flood zones be completed. Enter heights to the e Diagrams (at the end of Section H to complete this section.
H1. Provide the height of the	e top of the floor (as i	ndicated in Found	lation Type Diagrams) above the	he Lowest Adjacent Grade (LAG):
a) For Building Diagra floor (include above-gra crawlspaces or enclosu	de floors only for build			meters above the LAG
b) For Building Diagra higher floor (i.e., the floo enclosure floor) is:				meters above the LAG
			d in Item H2 instructions) eleval section H instructions) for the a	ated to or above the floor indicated by the ppropriate Building Diagram?
SECTION I - PF	OPERTY OWNER	(OR OWNER'S	AUTHORIZED REPRESE	NTATIVE) CERTIFICATION
	e best of my knowled			ust sign here. The statements in Sections icial completed Section H, they should
☐ Check here if attachment	s are provided (included	ding required phot	os) and describe each attachn	nent in the Comments area.
Property Owner or Owner's	Authorized Represent	tative Name:		
Address:				
City:			State:	ZIP Code:
Telephone:	Ext.:	Email:		
Signature:			Date:	
Comments:				

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

BUILDING PHOTOGRAPHS

See Instructions for Item A6.

Building Street Address (including Apt., Uni 917 Key Way	t, Suite, and/or Blo	lg. No.)	or P.O. Route and Box No.:	FOR INSURANCE COMPANY US			
City: Nokomis	State:	FL	ZIP Code: <u>34275</u>	Policy Number: Company NAIC Number:			

Instructions: Insert below at least two and when possible four photographs showing each side of the building (for example, may only be able to take front and back pictures of townhouses/rowhouses). Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." Photographs must show the foundation. When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo One

Photo One Caption: (01/26/2024) Front View

Clear Photo One



Photo Two

Photo Two Caption: (01/26/2024) Right Side View from Rear

Clear Photo Two

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11 BUILDING PHOTOGRAPHS

Continuation Page

Building Street Address (including Apt., Unit, St	FOR INSURANCE COMPANY USE			
917 Key Way City: Nokomis	State:	FL	ZIP Code: <u>34275</u>	Policy Number:

Insert the third and fourth photographs below. Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo Three

Photo Three Caption: (01/26/2024) Rear View

Clear Photo Three



Photo Four

Photo Four Caption: (01/26/2024) Left Side View from Front

Clear Photo Four

(01/26/2024) 3 Engineered Flood Flap Model #FFWF08 Rear Wall of Garage



(01/26/2024) 3 Engineered Flood Flap Model #FFWF08 Right Side Wall of Garage



(01/26/2024) Elevated AC Units and Tankless Water Heater





ICC-ES Evaluation Report

ESR-3560

Reissued September 2023

This report also contains:

- CBC Supplement

- FBC Supplement

Subject to renewal September 2024

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.

Copyright © 2023 ICC Evaluation Service, LLC. All rights reserved.

DIVISION: 08 00 00 -

OPENINGS

Section: 08 95 43— Vents/Foundation Flood

Vents

REPORT HOLDER: FLOOD FLAPS®, LLC

EVALUATION SUBJECT:

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05



1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015, 2012 and 2009 International Building Code® (IBC)
- 2021, 2018, 2015, 2012 and 2009 International Residential Code® (IRC)

Properties evaluated:

- Physical operation
- Water flow
- Weathering

2.0 USES

Flood Flaps® automatic flood vents are used to provide for the equalization of hydrostatic flood forces on exterior walls. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

Flood Flaps® automatic flood vents are engineered mechanically operated flood vents (FVs) that automatically allow flood waters to enter and exit enclosed areas. The FVs are constructed of ABS plastic which serves as the FV's housing, and a front grill that contains an anodized metal screen imbedded in polypropylene plastic. On contact with rising flood water, the grill will disengage from its secured position, allowing flood water and debris to flow through in either direction. The FVs are available in two series as described in Section 3.3.

The sealed series models contain two rubber flaps that close the FV to the passage of air when using with conditioned areas or sealed crawl spaces. In the same manner as the grill, the two rubber flaps are pushed open by water pressure, allowing water and debris to flow through the FV in either direction. See Figure 1 for an illustration of the Flood Flaps[®] automatic FV.

3.2 Engineered Opening:

The Flood Flaps® automatic FVs comply with the design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 (2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/SEI 24-05 (2012 and 2009 IBC and IRC)] for a rate of rise and fall of 5 feet per hour (0.423 mm/s). In order to comply with the engineered

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.



Copyright © 2023 Page 1 of 6

opening requirement of ASCE/SEI 24, Flood Flaps® automatic FVs must be installed in accordance with Section 4.0.

3.3 Flood Vent Series Models:

Flood Flaps[®] automatic FVs are available in two series with multiple models and sizes as described in <u>Table 1</u>. The sealed series models, designated FFWF, include two rubber flaps for the prevention of air flow. The multi-purpose series, designated FFNF, omits the rubber flaps.

3.4 Natural Ventilation:

Flood Flaps® automatic FV models FFNF12, FFNF08, FFNF05, and FFNF02 have metal screens with ½ inch by ½-inch (6 mm by 6 mm) openings and provide 37 square inches (0.02 m²) of net free opening to supply natural ventilation for under-floor ventilation. Flood Flaps® automatic FV models FFWF12, FFWF08, and FFWF05 have not been evaluated for use as openings for under-floor ventilation.

4.0 DESIGN AND INSTALLATION

Flood Flaps® automatic FVs are designed to be installed into walls of existing or new construction. Installation of the FVs must be in accordance with the manufacturer's instructions, the applicable code and this report. Flood Flaps® automatic FVs can be installed in wood, masonry and concrete walls up to a thickness of 12 inches (305 mm). In order to comply with the engineered opening design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 (2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/SEI 24-05 (2012 and 2009 IBC and IRC)], the Flood Flaps® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 220 squarefeet (20 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of12 inches (305 mm) above grade.

5.0 CONDITIONS OF USE:

The Flood Flaps® automatic flood vents described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The Flood Flaps® automatic FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- 5.2 The Flood Flaps® automatic FVs must not be used in place of "breakaway walls" in coastal high hazard areas but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised April 2021).

7.0 IDENTIFICATION

- 7.1 The ICC-ES mark of conformity, electronic labeling, or the evaluation report number (ICC-ES ESR-3560) along with the name, registered trademark, or registered logo of the report holder (Flood Flaps®) must be included in the product label.
- 7.2 In addition, the Flood Flaps® models described in this report are identified by a label bearing the model number.
- 7.3 The report holder's contact information is the following:

FLOOD FLAPS®, LLC
POST OFFICE BOX 1003
ISLE OF PALMS, SOUTH CAROLINA 29451
(843) 881-0190
www.floodflaps.com
info@floodflaps.com

TABLE 1—FLOOD FLAP AUTOMATIC FLOOD VENT MODEL SIZES

MODEL NUMBER	MODEL DESIGNATION	ROUGH OPENING (Width X Height) (inches)	VENT SIZE (W X H X D) (inches)	ENCLOSED AREA COVERAGE ² (ft ²)	NET FREE AREA OPENING ¹ (in ²)	
FFWF12	Sealed Series	16 x 8	15 ⁵ / ₈ X 7 ³ / ₄ X 12	220	NA	
FFNF12	Multi-Purpose	16 x 8	15 ⁵ / ₈ X 7 ³ / ₄ X 12	220	37	
FFWF08	Sealed Series	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 8	220	NA	
FFNF08	Multi-Purpose	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 8	220	37	
FFWF05	Sealed Series	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 5	220	NA	
FFNF05	Multi-Purpose	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 5	220	37	

For SI: 1 inch = 25.4 mm; 1 f^{12} = 0.093 m^2

¹For under-floor ventilation only.
²The enclosed coverage area in square feet for each model is equivalent to the performance of the same number of square inches of non-engineered openings.




FIGURE 1—FLOOD FLAPS® AUTOMATIC FLOOD VENT

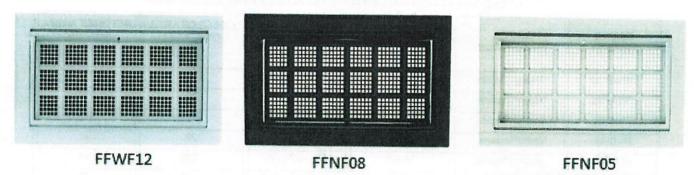


FIGURE 2—FLOOD FLAPS® AUTOMATIC FLOOD VENT SERIES MODELS

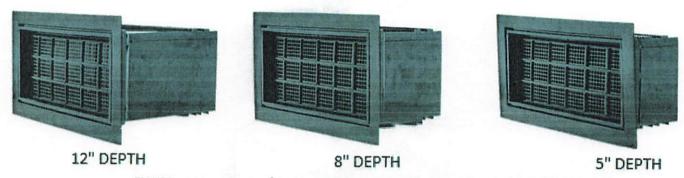


FIGURE 3—FLOOD FLAPS® AUTOMATIC FLOOD VENTS MULTIPLE DEPTH OFFERINGS



ICC-ES Evaluation Report

ESR-3560 CBC and CRC Supplement

Reissued September 2023

This report is subject to renewal September 2024.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC

EVALUATION SUBJECT:

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Flood Flaps® automatic flood vents, described in ICC-ES evaluation report ESR-3560, has also been evaluated for compliance with the code(s) noted below.

Applicable code editions:

- 2022 California Building Code (CBC)
- 2022 California Residential Code (CRC)

For evaluation of applicable Chapters adopted by the California Office of Statewide Health Planning and Development (OSHPD) AKA: California Department of Health Care Access and Information (HCAI) and the Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

2.0 CONCLUSIONS

2.1 CBC:

The Flood Flaps® automatic flood vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-3560, comply with CBC Chapter 12, provided the design and installation are in accordance with the 2021 International Building Code® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

- 2.1.1 OSHPD: The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.
- 2.1.2 DSA: The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

2.2 CRC:

The Flood Flaps® automatic flood vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-3560, comply with 2021 CRC, provided the design and installation are in accordance with the 2021 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued September 2023.





ICC-ES Evaluation Report

ESR-3560 FBC Supplement

Reissued September 2023 This report is subject to renewal September 2024.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC

EVALUATION SUBJECT:

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWF12; FFWF12; FFWF08; FFWF08; FFWF05; FFWF05

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Flood Flaps[®] automatic flood vents, described in ICC-ES evaluation report ESR-3560, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2023 and 2020 Florida Building Code—Building
- 2023 and 2020 Florida Building Code—Residential

2.0 CONCLUSIONS

The Flood Flaps® flood vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-3560, comply with the *Florida Building Code—Building Code—Building Code—Residential*, provided the design requirements are determined in accordance with the *Florida Building Code—Building* or the *Florida Building Code—Residential*, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-3530 for the 2021 and 2018 *International Building Code®* meet the requirements of the *Florida Building Code—Building* or the *Florida Building Code—Residential*, as applicable.

Use of the Flood Flaps flood vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality-assurance program is audited by a quality-assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official, when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued September 2023.

