☐ Check here if attachments.	
	Comments (including type of equipment and location, per C2(e), if applicable)
	Signature
	Community Name Telephone
	Local Official's Name Title
meters Datum	G10. Community's design flood elevation:
meters Datum	G9. BFE or (in Zone AO) depth of flooding at the building site:
meters Datum	G8. Elevation of as-built lowest floor (including basement) feet of the building:
:1	G7. This permit has been issued for:
Date Certificate of Compliance/Occupancy Issued	64. Permit Number G5. Date Permit Issued G6. [
ent purposes.	G3. 🔲 The following information (Items G4–G10) is provided for community floodplain management purposes
A-issued or community-issued BFE)	G2. A community official completed Section E for a building located in Zone A (without a FEMA-issued or community-issued BFE) or Zone AO.
nd sealed by a licensed surveyor, e source and date of the elevation	G1. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation date in the Comments area below.)
nagement ordinance can complete below. Check the measurement	The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8–G10. In Puerto Rico only, enter meters.
	SECTION G - COMMUNITY INFORMATION (OPTIONAL)
Company NAIC Number	City State ZIP Code VENICE Florida 34293
FOR INSURANCE COMPANY USE Policy Number:	IMPORTANT: In these spaces, copy the corresponding information from Section A. Building Street Address (including Apt., Unit, Suite, and/or Bidg. No.) or P.O. Route and Box No. 9058 ALLAPATA LANE
OMB No. 1660-0008 Expiration Date: November 30, 2018	ELEVATION CERTIFICATE

U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

ELEVATION CERTIFICATE Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION	FOR INSURANCE COMPANY LISE
A1. Building Owner's Name KAREN & LEE SCOTT	Policy Number:
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.	and Company NAIC Number:
9058 ALLAPATA LANE	
City State State	ZIP Code
A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Legal Description, etc.)	on, etc.)
1 -	OI, oic.)
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.) RES	RESIDENTIAL
	Horizontal Datum: ☐ NAD 1927 X NAD 1983
ng used to o	
A7. Building Diagram Number 1B	
A8. For a building with a crawispace or enclosure(s):	
a) Square footage of crawispace or enclosure(s) 0 sq ft	8
b) Number of permanent flood openings in the crawispace or enclosure(s) within 1.0 foot above adjacent grade	0 foot above adjacent grade 0
c) Total net area of flood openings in A8.b 0 sq in	
d) Engineered flood openings?	
A9. For a building with an attached garage:	
a) Square footage of attached garage 671 sq ft	12
 b) Number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade 	ve adjacent grade 6
c) Total net area of flood openings in A9.b 732 sq in	
d) Engineered flood openings? X Yes No	
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFORMATION) INFORMATION
B1. NFIP Community Name & Community Number SARASOTA COUNTY - 125144 B2. County Name SARASOTA	B3. State Florida
B4. Map/Panel B5. Suffix B6. FIRM Index B7. FIRM Panel B8. Flood Panel Date Effective/ Zone(s)	B9. Base Flood Elevation(s) (Zone AO, use Base Flood Depth)
	7
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9. ☐ FIS Profile ☒ FIRM ☐ Community Determined ☐ Other/Source:	Itered in Item B9:
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 NAVD 1988	88 Other/Source:
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? [] Yes	erwise Protected Area (OPA)? ☐ Yes 区 No
Designation Date:	

OMB No. 1660-0008 Expiration Date: November 30

R SECTION C26. SECTION AS S SHOWN IN SECTION "C" VERSION PROGRAM. ATTACHED IS ICC-ES ED SEAL.	ED FOR ATIONS N CON OTAL). /	able) OF THE HOME WAS US O CONVERSION). ELEV DATUM USING VERTCC 1,200 SQUARE FEET (TO	ation, per C2(e), if application, per C2(e), if	Comments (including type of equipment and location, per C2(e), if applicable) FILE #17-05-24. THE OUTSIDE A/C UNIT ON THE NORTHEAST SIDE OF THE HOME WAS USED FOR SECTION C2e. SECTION C2e. SECTION DERIVED FROM A HAND HELD G.P.S. UNIT (GPSTEST APP - NO CONVERSION). ELEVATIONS SHOWN IN SECTION WERE CONVERTED FROM N.G.V.D. 1929 DATUM TO N.A.V.D. 1988 DATUM USING VERTCON CONVERSION PROGRAM, SUBJECT STRUCTURE HAS (6) FLOOD VENTS, ENGINEERED FOR 1,200 SQUARE FEET (TOTAL). ATTACHED IS ICC-ESEVAULATION REPORT ESR-2074. CERTIFICATE VALID ONLY WITH ORIGINAL SIGNATURE & RAISED SEAL.
ompany, and (3) building owner	agent/c	unity official, (2) insurance	attachments for (1) comm	Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, a
	Ę,	Telephone (941) 497-1290	Date 12-16-2019	Signature S S S
N. CO	0	ZIP Code 34293	State Florida	City VENICE
Heres	X			Address 742 SHAMROCK BLVD
	, č.			Company Name STRAYER SURVEYING AND MAPPING, INC.
	98 39			Title PSM/CFM
25:		Der	License Number 5228	Certifier's Name B. GREGORY RIETH
X Check here if attachments.	×	veyor? ⊠Yes □No	ed by a licensed land sur	Were latitude and longitude in Section A provided by a licensed land surveyor?
certify elevation information. Inderstand that any false	y law to lable. I u	or architect authorized by to interpret the data available, Section 1001.	a land surveyor, engineer appresents my best efforts niment under 18 U.S. Co	This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.
N	CATIC	SECTION D - SURVEYOR, ENGINEER, OR ARCHITECT CERTIFICATION	VEYOR, ENGINEER, C	SECTION D - SUR
X feet meters	6.7	ding	on of deck or stairs, inclu	 h) Lowest adjacent grade at lowest elevation of deck or stairs, including structural support
X feet meters	7.0		o building (HAG)	g) Highest adjacent (finished) grade next to building (HAG)
★ feet □ meters	5.9		building (LAG)	f) Lowest adjacent (finished) grade next to building (LAG)
X feet meters	9.8	4	ment servicing the building on in Comments)	 e) Lowest elevation of machinery or equipment servicing the (Describe type of equipment and location in Comments)
X feet ☐ meters	6.4			d) Attached garage (top of slab)
feet	N/A		al member (V Zones only	c) Bottom of the lowest horizontal structural member (V Zones only)
feet	21.5			b) Top of the next higher floor
Check the measurement used. X feet	9.9 C	re floor)	t, crawispace, or enclosu	 a) Top of bottom floor (including basement, crawtspace, or enclosure floor)
		or the BFE.	be the same as that used f	Datum used for building elevations must be the same as that used for the BFE
		h) below.	ations in items a) through	_ 2
AR/A1-A30, AR/AH, AR/AO. ico only, enter meters.	AR/AE, AI uerto Rico	-V30, V (with BFE), AR, AR/A, Afgram specified in Item A7. In Pue Vertical Datum: NGVD1929	ith BFE), VE, V1-V30, V o the building diagram sp EL: 8.52' Vertical	C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/A, AR/AE, AR/A1–A30, AR/AH, Complete Items C2.a–h below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters. Benchmark Utilized: USC+GS BM#73ERS EL: 8.52' Vertical Datum: NGVD1929
	20001	e building is complete.	d when construction of th	
NED)	REQUIR	BUILDING ELEVATION INFORMATION (SURVEY REQUIRED)	Construction Drawings*	SECTION C - BUILT
Company NAIC Number	Com	ZIP Code 34293	State Florida	
	Polic	.O. Route and Box No.	te, and/or Bldg. No.) or P	Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 9058 ALLAPATA LANE
5 I	FOR	om Section A.	sponding information fr	IMPORTANT: In these spaces, copy the corresponding information from Section A.
Expiration Date: November 30, 2010	EXPIR			

a a	
ELEVATION CERTIFICATE	OMB No. 1660-0008 Expiration Date: November 30, 2018
IMPORTANT: In these spaces, copy the corresponding information from Section A. Building Street Address (including Apt., Unit, Suite, and/or Bidg. No.) or P.O. Route and Box No. 9058 ALLAPATA LANE	FOR INSURANCE COMPANY USE Policy Number:
City State ZIP Code VENICE Florida 34293	Company NAIC Number
SECTION E - BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE)	REQUIRED)
For Zones AO and A (without BFE), complete items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Ricc only, enter meters. E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below	LOMA or LOMR-F request, ment used. In Puerto Rico only, r the elevation is above or below
Provide elevation information for the following and check the appropriate boxes to show the highest adjacent grade (HAG) and the lowest adjacent grade (LAG). a) Top of bottom floor (including basement, crawlspace, or enclosure) is b) Top of bottom floor (including basement, crawlspace or enclosure) is	m
Crawispace, or enclosure) is [2] For Building Diagrams 6–9 with permanent flood openings provided in Section A Items 8 and/or 9 (see pages 1–2 of Instructions), the next higher floor (elevation C2.b in	s above or below the LAG. 9 (see pages 1–2 of Instructions),
E3. Attached garage (top of slab) is	s above or below the HAG.
	above or
E5. Zone A0 only: If no flood depth number is available, is the top of the bottom floor elevated in accordance with the community's floodplain management ordinance? Yes No Duknown. The local official must certify this information in Section G.	cordance with the community's certify this information in Section G.
SECTION F – PROPERTY OWNER (OR OWNER'S REPRESENTATIVE) CERTIFICATION The properly owner or owner's authorized representative who completes Sections A, B, and E for Zone A (without a FEMA-issued or community-issued BFE) or Zone AO must sign here. The statements in Sections A, B, and E are correct to the best of my knowledge	RTIFICATION ne A (without a FEMA-issued or rect to the best of my knowledge.
Property Owner or Owner's Authorized Representative's Name Address City State	ate ZIP Code
	Telephone
Comments	
	Check here if attachments.


BUILDING PHOTOGRAPHS

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A. CHY Building Street Address (including Apt., Unit, Suite, and/or Bidg. No.) or P.O. Route and Box No 9058 ALLAPATA LANE VENICE Florida State 34293 ZIP Code Company NAIC Number Policy Number: FOR INSURANCE COMPANY USE

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View", and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.

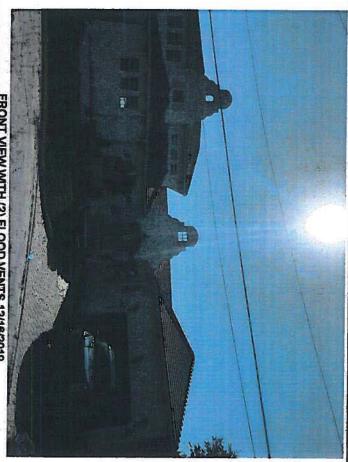

FRONT VIEW WITH (2) FLOOD VENTS 12/16/2019

Clear Photo One

Photo One Caption



Photo Two Caption

Clear Photo Two

BUILDING PHOTOGRAPHS

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2018

Building Street Address (including Apt., Unit, Suite, and/or Bidg. No.) or P.O. Route and Box No. IMPORTANT: In these spaces, copy the corresponding information from Section A. VENICE 9058 ALLAPATA LANE Florida State 34293 ZIP Code Company NAIC Number Policy Number: FOR INSURANCE COMPANY USE

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three Caption

Clear Photo Three



FEMA Form 086-0-33 (7/15)



Most Widely Accepted and Trusted

CC-ES Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2017 This report is subject to renewal 02/2019

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMARTVENT PRODUCTS, INC.

430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS:

MODELS #1540-520; #1540-521; #1540-510; #1540-511;

#1540-570; #1540-574; #1540-524; #1540-514



Look for the trusted marks of Conformity!

"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



A Subsidiary of core county

to any finding or other matter in this report, or as to any product covered by the report. recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not







ICC-ES Evaluation Report

ESR-2074

This report is subject to renewal February 2019 Reissued February 2017

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS Section: 08 95 43—Vents/Found –Vents/Foundation Flood Vents

REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 <u>info@smartvent.com</u> www.smartvent.com (877) 441-8368

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2015, 2012, Code® (IBC) 2012, 2009 and 2006 International Building
- 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2013 Abu Dhabi International Building Code (ADIBC)^T

¹The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

natural ventilation. hydrostatic pressure on walls of enclosures subject operated rising or falling flood waters. Smart Vent[®] units flood vents (FVs) are Certain models also allow engineered employed ಠ mechanically equalize ಠ

DESCRIPTION

<u>ယ</u> ___ General:

FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in pressure from one side of the foundation to the other. The either direction to equalize water level and hydrostatic

> various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Each unit is fabricated from stainless Automatic Foundation Flood Vents vertically arranged openings per unit. Stacking The water level stabilizes, equalizing the lateral forces. Model #1540-521 units **Vents** each steel. are contain Smart available Vent

Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

Ventilation:

Overhead Door Model #1540-514 both have screen covers with 1/4-inch-by-1/4-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches ventilation. in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural SmartVENT® Model #1540-510 and SmartVENT®

4.0 **DESIGN AND INSTALLATION**

installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent[®] FVs must be installed as follows: walls of any thickness. In order to comply with instructions, SmartVENT® Installation clips allow mounting in masonry and concrete the and FloodVENT® applicable code are and designed this report. ០

- With a minimum of two openings on different sides each enclosed area. 으
- With a minimum of one FV for every 200 square feet (18.6 m²) SmartVENT® (FloodVENT[®] Stacking Model #1540-52 installed with a minimum of one F\
 400 square feet (37.2 m²) of enclosed area. Stacking 으 enclosed area, except that cking Model #1540-511 #1540-521 7 혓 must every and
- Below the base flood elevation





■ With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

5.0 CONDITIONS OF USE

The Smart Vent[®] FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The Smart Vent[®] FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- 5.2 The Smart Vent[®] FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but

are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015.

7.0 IDENTIFICATION

The Smart VENT® models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 ³ / ₄ " × 7 ³ / ₄ "	200
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	$15^{3}/_{4}$ " \times $7^{3}/_{4}$ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT [®] Stacker	1540-511	16" X 16"	400
FloodVent [®] Stacker	1540-521	16" X 16"	400
For Ol. 4 inch = OF 4 mm. 4 parion foot = m2			

For SI: 1 inch = 25.4 mm; 1 square foot = m2

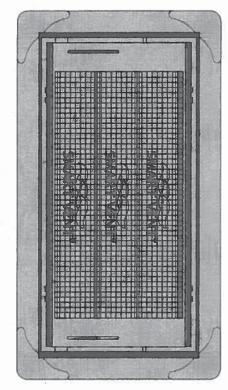


FIGURE 1—SMART VENT: MODEL 1540-510

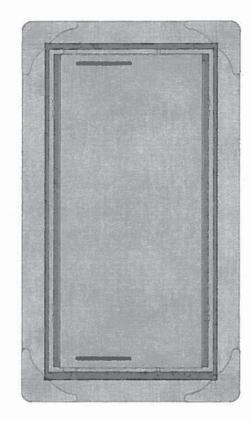


FIGURE 2—SMART VENT MODEL 1540-520

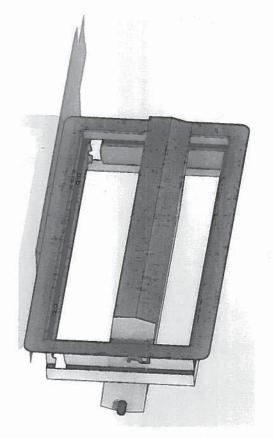


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN