OMB No. 1660-0008 Expiration Date: November 30, 2

Check here if attachments.			
-65			
			ia
V.			
,			
5.	8		
		Comments (including type of equipment and location, per C2(e), if applicable)	Comments (including type
		Date	
			Signature
	le	Telephone	Community Name
		Title	Local Official's Name
meters Datum	☐ feet	1 flood elevation:	G10. Community's design flood elevation:
feet meters Datum	feet_	BFE or (in Zone AO) depth of flooding at the building site:	
feet meters Datum	feet	of the building:	of the building:
		lowest floor (including basement)	G8. Elevation of as-built
	al Improvement	n Issued for: New Construction Substantial Improvement	G7. This permit has been issued for
G6. Date Certificate of Compliance/Occupancy Issued	96. D.	3 B1 G5. Date Permit Issued	G4. Permit Number 10-146392
nt purposes.	loodplain manageme	The following information (Items G4–G10) is provided for community floodplain management purposes	G3. The following i
-issued or community-issued BFE)	e A (without a FEMA	A community official completed Section E for a building located in Zone A (without a FEMA-issued or community-issued BFE) or Zone AO.	G2. A community of Zone AO.
d sealed by a licensed surveyor, source and date of the elevation	t has been signed an rmation. (Indicate the	The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.)	G1. The Information engineer, or all data in the Co
lagement ordinance can complete below. Check the measurement	ınity's floodplain man able item(s) and sign	The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8–G10. In Puerto Rico only, enter meters.	The local official who is Sections A, B, C (or E), used in Items G8—G10.
	TION (OPTIONAL)	SECTION G - COMMUNITY INFORMATION (OPTIONAL)	
Company NAIC Number	ZIP Code 34223	State ZIP Florida 342	City ENGLEWOOD
Policy Number:	Dute and Box No.	905 CHAPIN BLVD	905 CHAPIN BLVD
FOR INSURANCE COMPANY USE	ection A.	Building Street Address (including Act Inthe State and/or Did No De De Control A.	Ruilding Street Address
ביירים בי			

OMB No. 1660-0008 Expiration Date: November 30, 2

IMPORTANT: In these spaces, copy the corresponding information from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 905 CHAPIN BLVD	Policy Number:
City State ZIP Code ENGLEWOOD Florida 34223	Company NAIC Number
SECTION C - BUILDING ELEVATION INFORMATION (SURVEY REQUIRED)	EQUIRED)
	uction* X Finished Construction
Cc. Elevations – Zones A1-A30, AE, AH, A (with BFE), VE, V1-V30, V (with BFE), AR, AR/A, AR/AE, AR/A1-A30, AR/AH, AR/AO, Complete Items C2.a-h below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters. Benchmark Utilized: NGS T734 EL:10.73' Vertical Datum: NAVD 1988	/AE, AR/A1-A30, AR/AH, AR/AO. to Rico only, enter meters.
Datum used for building elevations must be the same as that used for the BFE.	
a) Top of bottom floor (including basement, crawlspace, or enclosure floor)	4.6 X feet meters
	14.7 X feet meters
c) Bottom of the lowest horizontal structural member (V Zones only)	
Lowest elevation of machinery or equipment servicing the building (Describe type of equipment and location in Comments)	17.0 X feet meters
f) Lowest adjacent (finished) grade next to building (LAG)	3.8 X feet meters
g) Highest adjacent (finished) grade next to building (HAG)	4.0 X feet meters
SECTION D - SURVEYOR, ENGINEER, OR ARCHITECT CERTIFICATION	CATION
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.	law to certify elevation information. ble. I understand that any false
)
Title PSM/CFM	
Company Name STRAYER SURVEYING AND MAPPING, INC.	Seal
Address 742 SHAMROCK BLVD	Heres
City State ZIP Code VENICE Florida 34293	N. X. X.
Signature Date Telephone 12-11-2017 (941) 497-1290	Ext
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.	gent/company, and (3) building owner.
Comments (including type of equipment and location, per C2(e), if applicable) FILE #17-04-37. THE OUTSIDE A/C UNIT ON THE WEST SIDE OF THE HOME WAS USED FOR SECTION C2e. STRUCTURE HAS 11 SMART VENTS (MODEL NO. 1540-521) INSTALLED, ENGINEERED FOR 2200 SQUARE INCHES (TOTAL). MAIN LIVING AREA IS NOT PILING OR COLUMN SUPPORTED. SECTION A5 WAS DERIVED FROM A HAND HELD G.P.S. UNIT (GPSTEST APP - NO CONVERSION). CERTIFICATE VALID ONLY WITH RAISED SEAL & SIGNATURE.	SECTION C2e. STRUCTURE HAS HES (TOTAL). MAIN LIVING AREA G.P.S. UNIT (GPSTEST APP - NO

U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

ELEVATION CERTIFICATE important: Follow the instructions on pages 1-9.

SECTION A - PROPERTY INFORMATION	I, (2) Insurance agent/company, and (3) building owner.
A1. Building Owner's Name JOSEPH & NANCY D'AMARIO	Policy Number:
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and 905 CHAPIN BLVD	oute and Company NAIC Number:
City State ENGLEWOOD Florida	ZIP Code 34223
A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Legal Description, etc.) LOT 20, LEMON BAY PARK, TAX ID #0499010013	v]
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.)	RESIDENTIAL
A5. Latitude/Longitude: Lat 26.96882° Long82.37058°	Horizontal Datum: NAD 1927 NAD 1983
A6. Attach at least 2 photographs of the building if the Certificate is being used to obtain flood insurance	•
A7. Building Diagram Number 6	
A8. For a building with a crawlspace or enclosure(s):	
1885	sqft
b) Number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot above adjacent grade	n 1.0 foot above adjacent grade 11
c) Total net area of flood openings in A8.b 1408 sq in	
A9. For a building with an attached garage:	
Square footage of attached garage 0 sq ft	
b) Number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade 0	bove adjacent grade 0
c) Total net area of flood openings in A9.b 0 sq in	
d) Engineered flood openings? Yes No	
D INSURANCE RATE MAP	(FIRM) INFORMATION
B1. NFIP Community Name & Community Number B2. County Name SARASOTA SARASOTA	B3. State Florida
B4. Map/Panel B5. Suffix B8. FIRM Index B7. FIRM Panel B8. Flood Number Date Effective/ Zone(s)	B9. Base Flood Elevation(s) (Zone AO, use Base Flood Depth)
12115C-0451 F 11-04-2016 11-04-2016 AE & VE	
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9	entered in Item B9:
B11. Indicate elevation datum used for BFE in Item B9: 🔲 NGVD 1929 🔯 NAVD 1988	1988 Other/Source:
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? 🔲 Yes)therwise Protected Area (OPA)? ☐ Yes 区 No
Designation Date: CBRS	

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A.	FOR INSTIRANCE COMPANY LICE
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 905 CHAPIN BLVD	Policy Number:
City State ZIP Code ENGLEWOOD Florida 34223	Company NAIC Number
SECTION E – BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE)	REQUIRED)
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters.	LOMA or LOMR-F request, nent used. In Puerto Rico only,
E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG). a) Top of bottom floor (including basement, crawispace, or enclosure) is	the elevation is above or below above or below the HAG.
crawispace, or enclosure) is feet meters	☐ above or ☐ below the LAG.
the next higher floor (elevation C2.b in the diagrams) of the building is feet meters above or below the HA	(see pages 1–2 of Instructions),
E3. Attached garage (top of slab) is	
E4. Top of platform of machinery and/or equipment feet meters	above or below the HAG.
E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in accordance with the community's floodplain management ordinance?	rtify this information in Section G.
SECTION F - PROPERTY OWNER (OR OWNER'S REPRESENTATIVE) CERTIFICATION	TIFICATION
The property owner or owner's authorized representative who completes Sections A, B, and E for Zone A (without a FEMA-issued or community-issued BFE) or Zone AO must sign here. The statements in Sections A, B, and E are correct to the best of my knowledge. Property Owner or Owner's Authorized Representative's Name	e A (without a FEMA-issued or ct to the best of my knowledge.
Address City State	3 ZIP Code
Signature Date Tele	Telephone
Comments	
	Check here if attachments.

BUILDING PHOTOGRAPHS

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A.

Building Street Address (including Apt., Unit, Suite, and/or Bidg. No.) or P.O. Route and Box No. ENGLEWOOD 905 CHAPIN BLVD Florida State 34223 ZIP Code Company NAIC Number Policy Number: FOR INSURANCE COMPANY USE


If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



FRONT VIEW 12/11/17

Clear Photo One

Photo One Caption

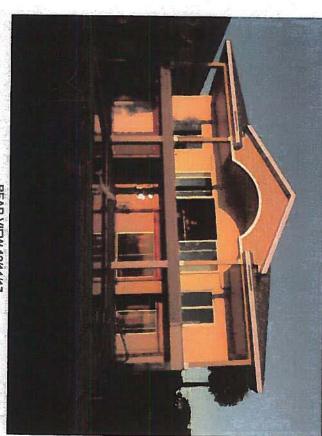

REAR VIEW 12/11/17

BUILDING PHOTOGRAPHS

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A.

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. ENGLEWOOD 905 CHAPIN BLVD Florida State 34223 ZIP Code FOR INSURANCE COMPANY USE Policy Number: Company NAIC Number

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three Caption

Clear Photo Three

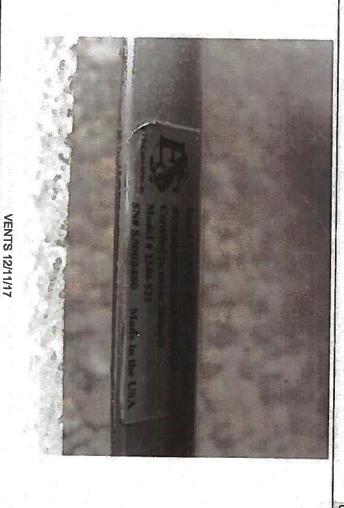


Photo Four Caption

Form Page 6 of 6 Clear Photo Four

ICC-ES Evaluation Report

ESR-2074

This report is subject to renewal February 2019. Reissued February 2017

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

Section: 08 95 43 DIVISION: 08 00 00 -Vents/Foundation Flood Vents **OPENINGS**

REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 nfo@smartvent.com v.smartvent.com

EVALUATION SUBJECT:

MODELS: #1540-520; #1540-521; #1540-6 #1540-570; #1540-574; #1540-524; #1540-614 SMART VENT[®] AUTOMATIC FOUNDATION FLOOD VENTS: MODELS: #1540-520; #1540-521; #1540-510; #1540-511;

1.0 EVALUATION SCOPE

Compliance with the following codes:

- Code® (IBC) (IBC) 2009 and 2006 International Building
- 2015, 2012, Code® (IRC) 2009 and 2006 International Residential
- The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC. ■ 2013 Abu Dhabi International Building Code (ADIBC)[†]

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

natural ventilation. rising or falling flood waters. Certain models also allow hydrostatic pressure on walls of enclosures operated The Smart Vent® units flood vents are engineered (FVs) emrið mechanically subject equalize ਰ

3.0 DESCRIPTION

3.1 General:

FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow either direction to equalize water level and hydrostatic When subjected to rising water, the Smart Vent® FVs Internal floats are activated, then pivot open to allow flow in pressure from one side of the foundation to the other. The

> various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit. Automatic Foundation Flood Vents Each unit is fabricated from stainless steel. The water level stabilizes, equalizing the lateral forces. are available Smart Ven

Engineered Opening:

hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0. IRC)] for a maximum rate of rise and fall The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and of 5.0 feet per

Ventilation:

Overhead Door Model #1540-514 both have screen covers with 1/4-inch-by-1/4-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. ventilation. Other FVs recognized in this report do not offer natural SmartVENT* Model #1540-510 and SmartVENT®

4.0 DESIGN AND INSTALLATION

engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows: Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section instructions, vents must be in accordance with installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the SmartVENT® # and FloodVENT® applicable code 978 and the manufacturer's designed Laport 8

- With a minimum of two openings on different sides of each enclosed area.
- With SmartVENT[®] Stacking Model #1540-FloodVENT[®] Stacking Model #1540-521 Installed with a minimum of one FV 400 square feet (37.2 m²) of enclosed area. feet (18.6 m²) SmartVENT a minimum of one FV for every 200 square of enclosed area, except that #1540-511 for every **Thust**
- Below the base flood elevation



(ans)

■ With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- 5,2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but

are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015.

7.0 IDENTIFICATION

The Smart VENT[®] models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (L.)	
EloodVENT®		my are one	בייאים (sq. זונ)
LICOGRETA	1540-520	1531," X 731,"	200
SmartVENT	1540-510	453/. W 73/. w	
ElandVENT® Contact P		10 th 11 14	200
LIONGA CIMI CABULIANO DOOL	1540-524	153/4" X 73/4"	200
SmartVENT Overhead Door	1540-514	15 ³ /." × 7 ³ /."	200
Wood Wall FloodVENT®	1000		200
ANDORANGII LIOOGANII	1540-570	14" X 83/4"	200
Wood Wall FloodVENT Overhead Door	1540-574	14" X 83/."	200
SmartVENT® Stacker	ARAO RAA		700
	1.10-0401	16"×16"	400
FloodVent Stacker	1540-521	16" X 16"	400
For SI: 1 inch = 25.4 mm; 1 square foot = m ²			

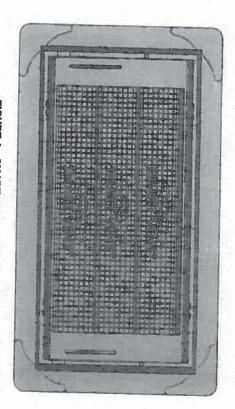


FIGURE 1—SMART VENT: MODEL 1540-510

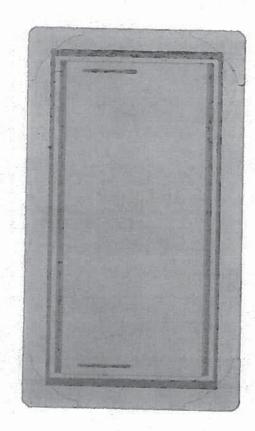


FIGURE 2—SMART VENT MODEL 1540-520

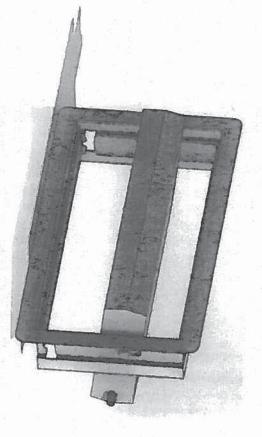


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN