ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

MPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY U				
Building Street Address (including Apt., Unit, St 5935 DIANA ROAD	uite, and/or Bldg. No.)	or P.O. Route and Box	No.	Policy Number:
City VENICE	State Florida	ZIP Code 34293		Company NAIC Number
SECTION	N G - COMMUNITY	INFORMATION (OPTI	ONAL)	The second secon
The local official who is authorized by law or or Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, en	Certificate, Complete	r the community's flood e the applicable item(s)	olain mar and sign	nagement ordinance can complete below. Check the measurement
G1. The information in Section C was takengineer, or architect who is authorized that in the Comments area below.)	en from other docume ed by law to certify el	entation that has been sevation information. (Ind	signed ar dicate the	nd sealed by a licensed surveyor, e source and date of the elevation
G2. A community official completed Section or Zone AO.	on E for a building loo	cated in Zone A (withou	t a FEMA	A-issued or community-issued BFE)
G3. The following information (Items G4–	G10) is provided for o	community floodplain m	anageme	ent purposes.
G4. Permit Number	G5. Date Permit Iss	sued		Pate Certificate of compliance/Occupancy Issued
G7. This permit has been issued for:	New Construction [Substantial Improver	mont	
G8. Elevation of as-built lowest floor (including of the building:			feet	meters Datum
G9. BFE or (in Zone AO) depth of flooding at t	he building site:		feet	meters Datum
G10. Community's design flood elevation:			feet	meters Datum
Local Official's Name		Title		
Community Name		Telephone		
Signature		Date		
Comments (including type of equipment and loc	ation, per C2(e), if ap	pplicable)		
				☐ Check here if attachments.

U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.


Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

	SEC	TION A - PROPERTY	Y INFOR	MATION			RANCE COMPANY USE
A1. Building Owner's JOSEPH D. GIBSON	1			Marie 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 -		Policy Num	
A2. Building Street A Box No. 5935 DIANA ROAD	ddress (in	cluding Apt., Unit, Sul	te, and/o	r Bldg. No.) (or P.O. Route and	Company N	NAIC Number:
City VENICE				State Florida		ZIP Code 34293	
A3. Property Descrip LOTS 18069 & 18076	otion (Lot a	nd Block Numbers, Ta VENICE UNIT 68, TA	ax Parce X ID #04	l Number, Le 173070021	gal Description, e	itc.)	
A4. Building Use (e.	g., Residen	itial, Non-Residential,	Addition	, Accessory,	etc.) RESIDEI	NTIAL	
A5. Latitude/Longitud	de: Lat. <u>27</u>	7.02585°	Long{	82.40701°	Horizont	al Datum: NAD	1927 × NAD 1983
A6. Attach at least 2	photograp	hs of the building if the	e Certific	ate is being	used to obtain flo	od insurance.	
A7. Building Diagram	n Number	1B					
A8. For a building wi	th a crawls	pace or enclosure(s):					
a) Square footag	ge of crawls	space or enclosure(s)	1		0 sq ft		
b) Number of pe	rmanent flo	ood openings in the cra	awispac	e or enclosur	e(s) within 1.0 foc	ot above adjacent gra	ade O
c) Total net area	of flood op	enings in A8.b		0 sq ir	1		
d) Engineered fl	ood openin	gs? Yes 🗵 N	No				
A9. For a building with	h an attach	ed garage:					
a) Square footag	je of attach	ed garage		536 sq ft	t		
b) Number of pe	rmanent flo	od openings in the att	tached g	arage within	1.0 foot above ad	ljacent grade 3	
c) Total net area				600 sq		***************************************	The second second decided and the second sec
d) Engineered flo	ood opening	gs? 🛛 Yes 🔲 N					
	SE	CTION B - FLOOD I	NSURA	NCE RATE	MAP (FIRM) INI	FORMATION	
B1. NFIP Community SARASOTA COUNT				B2. County SARASOTA			B3. State Florida
B4. Map/Panel E Number	35. Suffix	B6. FIRM Index Date	Effe	RM Panel ective/ vised Date	B8. Flood Zone(s)	B9. Base Flood E (Zone AO, use	levation(s) e Base Flood Depth)
12115C0343 F	:	11-04-2016	11-04-2		AE	11'	
B10. Indicate the sou	rce of the I	Base Flood Elevation	(BFE) da	ata or base fl	ood depth enterer	d in Item B9:	
		Community Deterr					
B11. Indicate elevation	on datum u	sed for BFE in Item B	9: 🔲 N	GVD 1929	⋈ NAVD 1988	Other/Source:	
B12. Is the building to	ocated in a	Coastal Barrier Reso	urces Sy	stem (CBRS) area or Otherwi	se Protected Area (C	PPA)? ☐ Yes ⊠ No
Designation Da				☐ OPA	,		
		Production of the company of the com					

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

Building Street Address (including Apt., Unit, Suite, and/or Bidg, No.) or P.O. Route and Box No. SSSS DIANA ROAD Sistle ZIP Code Fiorida 34293 SECTION C - BUILDING ELEVATION INFORMATION (SURVEY REQUIRED) C1. Building elevations are based on: ☐ construction Drawings* ☐ Building Under Construction* ☑ Finished Construction A new Elevation Certificate will be required when construction of the building is complete. C2. Elevations - Zones A1-A30, AE, AH, A with BFE, IV, EV, 1-V-130, V (with BFE), AR, AR/A, AR/AE, AR/A1-A30, AR/AH, AR/AC. Complete Items C2.3—h below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters. Benchmark Utilized: NS BMMSAR23 EL. 92.1* ☐ Vertical Datum: NAVD 1988 Indicate elevation datum used for the elevations in items a) through h) below. ☐ Indicate elevation datum used for the elevations in items a) through h) below. ☐ Indicate elevation datum used for the elevations in items a) through h) below. ☐ Datum used for building elevations must be the same as that used for the BFE. Check the measurement used. a) Top of bottom floor (including basement, crawlspace, or enclosure floor) ☐ 12.4 ☑ feet ☐ meters b) Top of the next higher floor ☐ OB building elevations must be the same as that used for the BFE. Check the measurement used. d) Attached garage (top of slab) ☐ OB the next higher floor ☐ OB the next elevation of machinery or equipment servicing the building ☐ OB the next elevation of machinery or equipment servicing the building ☐ OB the next elevation of machinery or equipment servicing the building ☐ OB the next elevation of machinery or equipment servicing the building ☐ OB the next elevation of machinery or equipment servicing the building ☐ OB the next elevation of machinery or equipment servicing the building ☐ OB the next elevat	IMPORTANT: In these spaces, copy the corresponding			FOR INSURANCE	CE COMPANY USE
SECTION C – BUILDING ELEVATION INFORMATION (SURVEY REQUIRED) C1. Building elevations are based on: □ construction Drawings* □ Building Under Construction □ Finished Construction □ An new Elevation Certificate will be required when construction of the building is complete C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/A, AR/AE, AR/A1–A30, AR/AH, AR/AO. Complete Items C2.a—h below according to the building diagram specified in tem A7. In Puerto Ricco only, enter meters. Benchmark Utilized* INGS BM#SAR/32 EL* 9.21* □ Vertical Datum: INAVD1988 Indicate elevation datum used for the elevations in Items a) through h) below. □ INGVD 1929 □ NAVD 1988 □ Other/Source: □ Datum used for building elevations must be the same as that used for the BFE. □ Check the measurement used. a) Top of bottom floor (including basement, crawlspace, or enclosure floor) □ 12.4 □ feet □ meters b) Top of the next higher floor □ INA □ feet □ meters c) Bottom of the lowest horizontal structural member (V Zones only) □ Indicate darage (top of slab) □ 12.0 □ feet □ meters e) Lowest elevation of machinery or equipment servicing the building (Describe type of equipment and location in Comments) □ 12.5 □ feet □ meters e) Lowest elevation of machinery or equipment servicing the building (Describe type of equipment and location in Comments) □ 12.5 □ feet □ meters f) Lowest adjacent (finished) grade next to building (LAG) □ 10.9 □ feet □ meters g) Highest adjacent (finished) grade next to building (LAG) □ 10.9 □ feet □ meters f) Lowest adjacent (finished) grade next to building (LAG) □ 11.3 □ feet □ meters g) Highest adjacent (finished) grade next to building (LAG) □ 11.3 □ feet □ meters f) Lowest adjacent (finished) grade next to building (LAG) □ 11.3 □ feet □ meters g) Highest adjacent (finished) grade next to building (LAG) □ 11.3 □ feet □ meters f) Lowest adjacent (finished) grade next to building (LAG) □ 11.3 □ feet □ meters g) Lovertification is		Bldg. No.) or P.O. Rou	ite and Box No.	Policy Number:	
C1. Building elevations are based on:	1			Company NAIC	Number
*A new Elevation Certificate will be required when construction of the building is complete. C2. Elevations _ Zones A1-A30, AE, AH, A (with BFE), VE, V1-V30, V (with BFE), AR, AR/A, AR/AE, AR/A1-A30, AR/AH, AR/AO. Complete Items C2.= he below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters. Benchmark Utilized: NGS BM#SAR23 EL: 9.21' Vertical Datum: NAVD1988 Indicate elevation datum used for the elevations in items a) through h) below. MSVD 1929 NAVD 1988 Other/Source: Datum used for building elevations must be the same as that used for the BFE. Check the measurement used. a) Top of bottom floor (including basement, craw/space, or enclosure floor)	SECTION C - BUILDING ELI	EVATION INFORMAT	TION (SURVEY RE	EQUIRED)	
SECTION D – SURVEYOR, ENGINEER, OR ARCHITECT CERTIFICATION This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001. Were latitude and longitude in Section A provided by a licensed land surveyor? Yes No Check here if attachments. Certifier's Name B. GREGORY RIETH 5228 Title PSM/CFM Company Name STRAYER SURVEYING AND MAPPING, INC. Address 742 SHAMROCK BLVD City VENICE Signature Date O6-08-2020 Telephone Ext. O6-08-2020 (941) 497-1290 Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner. Comments (including type of equipment and location, per C2(e), if applicable) FILE #19-02-71. THE OUTSIDE A/C UNIT ON THE EAST SIDE OF THE HOME WAS USED FOR SECTION C2e. SECTION A5 WAS DERIVED FROM A HAND HELD G.P.S. UNIT (GPSTEST APP - NO CONVERSION). SUBJECT STRUCTURE HAS (3) FLOOD VENTS, ENGINEERED FOR 600 SQUARE FEET (TOTAL). ATTACHED IS ICC-5E EVALUATION REPORT FESS-2074	C1. Building elevations are based on: Construction *A new Elevation Certificate will be required when concern the complete Items C2.a—h below according to the build Benchmark Utilized: NGS BM#SAR23 EL: 9.21' Indicate elevation datum used for the elevations in items NGVD 1929 NAVD 1988 Other/Statement Datum used for building elevations must be the same a) Top of bottom floor (including basement, crawlspub) Top of the next higher floor c) Bottom of the lowest horizontal structural member d) Attached garage (top of slab) e) Lowest elevation of machinery or equipment serve (Describe type of equipment and location in Comf) Lowest adjacent (finished) grade next to building g) Highest adjacent (finished) grade next to building the Lowest adjacent grade at lowest elevation of decimals.	n Drawings*	ding Under Construing is complete. FE), AR, AR/A, AR/ in Item A7. In Puerto NAVD1988 w.	Check the month of the control of th	easurement used. meters
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001. Were latitude and longitude in Section A provided by a licensed land surveyor? Yes No Check here if attachments. Certifier's Name B. GREGORY RIETH 5228 Company Name STRAYER SURVEYING AND MAPPING, INC. Address 742 SHAMROCK BLVD City State Florida State Florida State Ge-08-2020 Telephone (941) 497-1290 Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner. Comments (including type of equipment and location, per C2(e), if applicable) FILE #19-02-71. THE OUTSIDE A/C UNIT ON THE EAST SIDE OF THE HOME WAS USED FOR SECTION C2e. SECTION A5 WAS DERIVED FROM A HAND HELD G.P.S. UNIT (GPSTEST APP - NO CONVERSION). SUBJECT STRUCTURE HAS (3) FLOOD VENTS, ENGINEERED FOR 600 SQUARE FEET (TOTAL). ATTACHED IS ICC-ES EVALUATION REPORT FSR-2074	structural support				meters
B. GREGORY RIETH Title PSM/CFM Company Name STRAYER SURVEYING AND MAPPING, INC. Address 742 SHAMROCK BLVD City VENICE Date 06-08-2020 Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner. Comments (including type of equipment and location, per C2(e), if applicable) FILE #19-02-71. THE OUTSIDE A/C UNIT ON THE EAST SIDE OF THE HOME WAS USED FOR SECTION C2e. SECTION A5 WAS DERIVED FROM A HAND HELD G.P.S. UNIT (GPSTEST APP - NO CONVERSION). SUBJECT STRUCTURE HAS (3) FLOOD VENTS, ENGINEERED FOR 600 SQUARE FEET (TOTAL), ATTACHED IS ICC-ES EVALUATION REPORT FSR-2074	This certification is to be signed and sealed by a land sur I certify that the information on this Certificate represents statement may be punishable by fine or imprisonment un	veyor, engineer, or arc my best efforts to inter der 18 U.S. Code, Sec	hitect authorized by pret the data availation 1001.	law to certify elevable. I understand	that any false
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner. Comments (including type of equipment and location, per C2(e), if applicable) FILE #19-02-71. THE OUTSIDE A/C UNIT ON THE EAST SIDE OF THE HOME WAS USED FOR SECTION C2e. SECTION A5 WAS DERIVED FROM A HAND HELD G.P.S. UNIT (GPSTEST APP - NO CONVERSION). SUBJECT STRUCTURE HAS (3) FLOOD VENTS, ENGINEERED FOR 600 SQUARE FEET (TOTAL). ATTACHED IS ICC-ES EVALUATION REPORT FSR-2074	B. GREGORY RIETH Title PSM/CFM Company Name STRAYER SURVEYING AND MAPPING, INC. Address 742 SHAMROCK BLVD City VENICE	State Florida Date	34293 Telephone	Ext.	lace of the lace o
Comments (including type of equipment and location, per C2(e), if applicable) FILE #19-02-71. THE OUTSIDE A/C UNIT ON THE EAST SIDE OF THE HOME WAS USED FOR SECTION C2e. SECTION A5 WAS DERIVED FROM A HAND HELD G.P.S. UNIT (GPSTEST APP - NO CONVERSION). SUBJECT STRUCTURE HAS (3) FLOOD VENTS, ENGINEERED FOR 600 SQUARE FEET (TOTAL). ATTACHED IS ICC-ES EVALUATION REPORT FSR-2074	Copy all pages of this Flevetion Cortificate and all ottoches				
	Comments (including type of equipment and location, per FILE #19-02-71. THE OUTSIDE A/C UNIT ON THE EAST DERIVED FROM A HAND HELD G.P.S. UNIT (GPSTEST VENTS, ENGINEERED FOR 600 SQUARE FEET (TOTA	C2(e), if applicable) I SIDE OF THE HOME I APP - NO CONVERS L). ATTACHED IS ICC	WAS USED FOR	SECTION C2e. S	ECTION A5 WAS



रक्षण्याती (क्षण्याची होते । अकार्यक हम्में अन्य हम त्राप्तिक एक प्राप्ति क्षण्यों क्षणी रहा जाती

网络 100 医乳气管 110

and the state of t

transport of the contract of higher through the first of the contract of the c

gen and the second of the seco

on a properties appear of figure on the properties of the second of the

Carrier with the control of

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the correspond			FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, an 5935 DIANA ROAD	nd/or Bldg. No.) or P.O	. Route and Box No.	Policy Number:
City VENICE	State Florida	ZIP Code 34293	Company NAIC Number
SECTION E – BUILDING EI FOR ZON	LEVATION INFORM IE AO AND ZONE A	ATION (SURVEY NOT (WITHOUT BFE)	REQUIRED)
For Zones AO and A (without BFE), complete Items E complete Sections A, B,and C. For Items E1–E4, use enter meters.	1–E5. If the Certificate natural grade, if availa	e is intended to support a able. Check the measure	LOMA or LOMR-F request, ment used. In Puerto Rico only,
E1. Provide elevation information for the following and the highest adjacent grade (HAG) and the lowest	d check the appropriat adjacent grade (LAG)	e boxes to show whethe	r the elevation is above or below
 a) Top of bottom floor (including basement, crawlspace, or enclosure) is b) Top of bottom floor (including basement, 			rs
crawlspace, or enclosure) is		feet meter	
E2. For Building Diagrams 6–9 with permanent flood the next higher floor (elevation C2.b in the diagrams) of the building is	openings provided in S	Section A Items 8 and/or	
E3. Attached garage (top of slab) is		feet meter	
E4. Top of platform of machinery and/or equipment servicing the building is		feet _ meter	s 🔲 above or 🔲 below the HAG.
E5. Zone AO only: If no flood depth number is available floodplain management ordinance? Yes	ole, is the top of the bo	ttom floor elevated in ac The local official must o	cordance with the community's certify this information in Section G.
SECTION F - PROPERTY OW	NER (OR OWNER'S	REPRESENTATIVE) CE	RTIFICATION
The property owner or owner's authorized representat community-issued BFE) or Zone AO must sign here. 1	ive who completes Se The statements in Sec	ctions A, B, and E for Zo tions A, B, and E are con	ne A (without a FEMA-issued or rect to the best of my knowledge.
Property Owner or Owner's Authorized Representative	e's Name		
Address	City	St	ate ZIP Code
Signature	Date	Те	lephone
Comments			
			☐ Check here if attachments.

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy			FOR INSURANCE COMPANY USE
Building Street Address (including Apt. 5935 DIANA ROAD	., Unit, Suite, and/or Bldg. No.)	or P.O. Route and Box No.	Policy Number:
City	State	ZIP Code	Company NAIC Number
VENICE	Florida	34293	,

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



FRONT VIEW 06-04-2020

Photo One Caption

Clear Photo One



REAR VIEW 06-04-2020

Photo Two Caption

Clear Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE


Continuation Page

OMB No. 1660-0008

Expiration Date: November 30, 2022

e corresponding information	on from Section A.	FOR INSURANCE COMPANY USE
Unit, Suite, and/or Bldg. No.)	or P.O. Route and Box No.	Policy Number:
State Florida	ZIP Code 34293	Company NAIC Number
	Unit, Suite, and/or Bldg. No.) State	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.

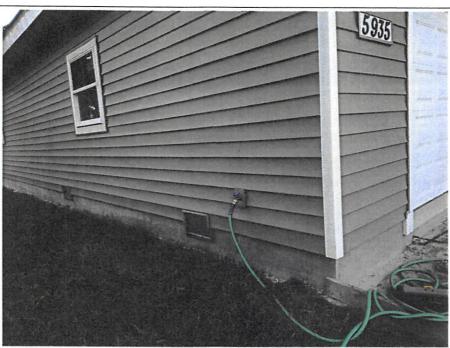

VENTS 06-04-2020

Photo Three Caption

Clear Photo Three



VENTS 06-04-2020

Photo Four Caption

Clear Photo Four



Most Widely Accepted and Trusted

ICC-ES Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2015
This report is subject to renewal 02/2017.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMARTVENT PRODUCTS, INC.

430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514



Look for the trusted marks of Conformity!

"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



A Subsidiary of CORECTAL

of MIERIANDAN

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.







ICC-ES Evaluation Report

ESR-2074*

Reissued February 2015

This report is subject to renewal February 2017.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2012, 2009 and 2006 International Building Code® (IBC)
- 2012, 2009 and 2006 International Residential Code®
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

¹The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch. allowing the door to rotate out of the way and allow flow.

to any finding or other matter in this report, or as to any product covered by the report

The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT®Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.6.2.2 of ASCE/SEI 24 for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with 1/4-inch-by-1/4-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural

4.0 DESIGN AND INSTALLATION

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. The mounting straps allow mounting in masonry and concrete walls up to 12 inches (305 mm) thick. In order to comply with the engineered opening design principle noted in Section 2.6.2.2 of ASCE/SEI 24, the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m2) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final

*Revised July 2015

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service. I.I.C. express or implied, as



grade or floor and finished exterior grade immediately under each opening.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The Smart Vent[®] FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but

are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated October 2013 (editorially revised May 2014).

7.0 IDENTIFICATION

The Smart VENT® models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

TABLE 1—MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 Inch = 25.4 mm; 1 square foot = m²

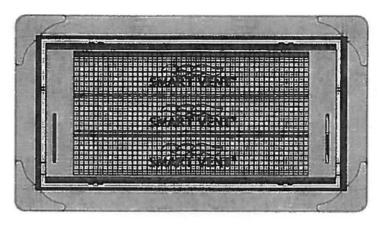


FIGURE 1-SMART VENT: MODEL 1540-510

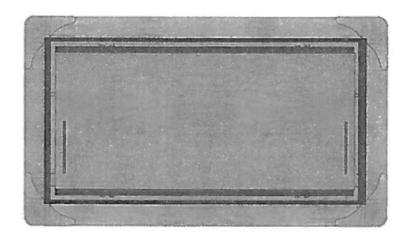


FIGURE 2-SMART VENT MODEL 1540-520

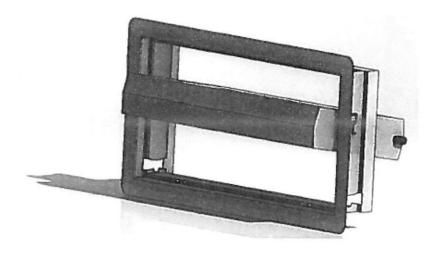


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN



ICC-ES Evaluation Report

ESR-2074 FBC Supplement*

Reissued February 2015

This report is subject to renewal February 2017.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent[®] Automatic Foundation Flood Vents, recognized in ICC-ES master report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2014 Florida Building Code—Building (FBC)
- 2014 Florida Building Code—Residential (FRC)

2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the FBC and the FRC, provided the design and installation are in accordance with the *International Building Code®* provisions noted in the master report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the FBC and the FRC.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the master report, reissued February 2015 and revised July 2015.

*Revised July 2015

