U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency

National Flood Insurance Program

ELEVATION CERTIFICATE

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11 Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
A1. Building Owner's Name: KWAK KRZYSZTOF	Policy Number:
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 1227 DONA WAY	Company NAIC Number:
City: NOKOMIS State: FL	ZIP Code: 34275
A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel Nur NE 1/4 OF NW 1/4 OF NE 1/4 OF SE 1/4 LESS R/W FOR DONA WAY IN RPB 3 PG 12	nber:
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.): RESIDENTIAL	
A5. Latitude/Longitude: Lat. 27° 07' 48.21"N Long. 82° 26' 09.16"W Horiz. Datum:	NAD 1927 🛛 NAD 1983 🗌 WGS 84
A6. Attach at least two and when possible four clear color photographs (one for each side) of the ba	uilding (see Form pages 7 and 8).
A7. Building Diagram Number:1B	
A8. For a building with a crawlspace or enclosure(s):	
a) Square footage of crawlspace or enclosure(s): N/A sq. ft.	
b) Is there at least one permanent flood opening on two different sides of each enclosed area?	Yes No N/A
 c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot Non-engineered flood openings: N/A Engineered flood openings: N/A 	
d) Total net open area of non-engineered flood openings in A8.c: N/A sq. in.	
e) Total rated area of engineered flood openings in A8.c (attach documentation - see Instruction	ons): <u>N/A</u> sq. ft.
f) Sum of A8.d and A8.e rated area (if applicable – see Instructions):N/A sq. ft.	
A9. For a building with an attached garage:	
a) Square footage of attached garage: 501 sq. ft.	
b) Is there at least one permanent flood opening on two different sides of the attached garage?	?⊠Yes □ No □ N/A
 c) Enter number of permanent flood openings in the attached garage within 1.0 foot above adjacent Non-engineered flood openings: 	acent grade:
d) Total net open area of non-engineered flood openings in A9.c: N/A sq. in.	
e) Total rated area of engineered flood openings in A9.c (attach documentation - see Instruction	ons): 1000 sq. ft.
f) Sum of A9.d and A9.e rated area (if applicable – see Instructions): N/A sq. ft.	
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFO	RMATION
B1.a. NFIP Community Name: SARASOTA COUNTY B1.b. NFIP Com	munity Identification Number: 125144
B2. County Name: SARASOTA B3. State: FL B4. Map/Panel No.:	12115C0243 B5. Suffix: G
B6. FIRM Index Date: 03/27/2024 B7. FIRM Panel Effective/Revised Date: 03/27/20	24
B8. Flood Zone(s): AE B9. Base Flood Elevation(s) (BFE) (Zone AO, use I	Base Flood Depth): 9'
B10. Indicate the source of the BFE data or Base Flood Depth entered in Item B9: FIS FIRM Community Determined Cother:	
B11. Indicate elevation datum used for BFE in Item B9: ☐ NGVD 1929 ☒ NAVD 1988 ☐ Other	/Source:
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Prot Designation Date: N/A CBRS CPA	ected Area (OPA)?
B13. Is the building located seaward of the Limit of Moderate Wave Action (LiMWA)?	No

OMB Control No. 1660-0008 Expiration Date: 06/30/2026

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.	FOR INSURANCE COMPANY USE
1227 DONA WAY City: NOKOMIS State: FL ZIP Code: 34275	Policy Number: Company NAIC Number:
SECTION C. DUILDING ELEVATION INFORMATION (SI	
SECTION C - BUILDING ELEVATION INFORMATION (SI	
C1. Building elevations are based on: Construction Drawings* Building Under C *A new Elevation Certificate will be required when construction of the building is complete.	
C2. Elevations – Zones A1–A30, AE, AH, AO, A (with BFE), VE, V1–V30, V (with BFE), AF A99. Complete Items C2.a–h below according to the Building Diagram specified in Item Benchmark Utilized: GPS NAIL 22-4832 ELEV.: 4.79' Vertical Datum: NAVD	n A7. In Puerto Rico only, enter meters.
Indicate elevation datum used for the elevations in items a) through h) below. ☐ NGVD 1929 ☑ NAVD 1988 ☐ Other:	
Datum used for building elevations must be the same as that used for the BFE. Conversion If Yes, describe the source of the conversion factor in the Section D Comments area.	factor used? Yes No Check the measurement used:
a) Top of bottom floor (including basement, crawlspace, or enclosure floor):	11.5 Seet meters
b) Top of the next higher floor (see Instructions):	N/A feet meters
c) Bottom of the lowest horizontal structural member (see Instructions):	N/A feet meters
d) Attached garage (top of slab):	6.8 🛛 feet 🗌 meters
e) Lowest elevation of Machinery and Equipment (M&E) servicing the building (describe type of M&E and location in Section D Comments area):	11.1 🛛 feet 🗌 meters
f) Lowest Adjacent Grade (LAG) next to building: Natural Finished	6.7 feet meters
g) Highest Adjacent Grade (HAG) next to building: Natural Finished	7.8 feet meters
h) Finished LAG at lowest elevation of attached deck or stairs, including structural support: —	7.5 🛭 feet 🗌 meters
SECTION D - SURVEYOR, ENGINEER, OR ARCHITEC	T CERTIFICATION
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorinformation. I certify that the information on this Certificate represents my best efforts to integrate statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 10	erpret the data available. I understand that any
Were latitude and longitude in Section A provided by a licensed land surveyor? 🛛 Yes [No
☑ Check here if attachments and describe in the Comments area.	managa.
Certifier's Name: JULIO C. RODRIGUEZ License Number: LS 6919	15 SAR ROLL 456919
Title: LAND SURVEYOR	O Nes Nu
Company Name: GLOBAL PROJECTS SURVEYING LLC	LS 6919
Address: 6528 US HWY 301 S, UNIT 106	
City: RIVERVIEW State: FL ZIP Code: 335	78 STATE OF
Telephone: (813) 423-3483 Ext.: Email: CONTACT@GPSFLORIDA.	NET SILVE OF
Signature: Date: 01/23/2	2025 Place Seal Here
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) ins	surance agent/company, and (3) building owner.
Comments (including source of conversion factor in C2; type of equipment and location per A5 Latitude and longitude were obtained from www.labins.org A9(c) There are 4 flood vents, Model Ffv-1608. 250 SQ FT each. 4x250 SQ FT = required, manufactured by smart product innovations, ESR-4332. C2(e) A/C unit is located at the right side of the house. Effective FIRM during permitting/construction 12115C0243F, AE 10.0'	

Building Street Address (including Apt., Unit, Suite, and/or E	Bldg. No.) (or P.O. Route	and B	ox No.	:	FOR INSURAI	NCE COMPANY USE
1227 DONA WAY						Policy Number:	
City: NOKOMIS State:	FL_	ZIP Code:	3427	' 5		Company NAIC	Number:
OFICTION F. DIW DING MEACH	IDENELI'	TAIFORMA	TION	1.4011	DVEVA	•	
SECTION E - BUILDING MEASU FOR ZONE AO, ZON	NE AR/A	D, AND ZON	IE A	(WITI	HOUT E	BFE)	
For Zones AO, AR/AO, and A (without BFE), complete Ite intended to support a Letter of Map Change request, comenter meters.	ems E1–E nplete Sec	5. For Items E tions A, B, an	1–E4 d C. 0	l, use i Check	natural g the mea	rade, if available surement used.	e. If the Certificate is In Puerto Rico only,
Building measurements are based on: Construction *A new Elevation Certificate will be required when constru	_	·	-		nstruction	n*	Construction
E1. Provide measurements (C.2.a in applicable Building measurement is above or below the natural HAG and			ng an	d che	ck the ap	ppropriate boxes	to show whether the
 a) Top of bottom floor (including basement, crawlspace, or enclosure) is: 			feet		meters	above or	below the HAG.
b) Top of bottom floor (including basement, crawlspace, or enclosure) is:			feet		meters	above or	below the LAG.
E2. For Building Diagrams 6-9 with permanent flood open	enings pro	vided in Secti	on A I	Items 8	8 and/or	9 (see pages 1-	2 of Instructions), the
next higher floor (C2.b in applicable Building Diagram) of the building is:		П	feet	П.	meters	☐ above or	below the HAG.
E3. Attached garage (top of slab) is:			feet	_	meters	☐ above or	below the HAG.
E4. Top of platform of machinery and/or equipment	***************************************	U	1001	ٔ لسا			
servicing the building is:			feet		meters	above or	below the HAG.
E5. Zone AO only: If no flood depth number is available, floodplain management ordinance? Yes							e community's rmation in Section G.
SECTION F - PROPERTY OWNER (OR (OWNER'S	S AUTHORI	ZED	REPF	RESENT	TATIVE) CERT	IFICATION
The property owner or owner's authorized representative sign here. The statements in Sections A, B, and E are co					E for Zo	ne A (without BF	E) or Zone AO must
Check here if attachments and describe in the Comm	ents area.	•					
Property Owner or Owner's Authorized Representative N	ame:						
Address:							
City:				State	e:	ZIP Code:	
Telephone: Ext.: Ema	ail:			•			

Signature:		Dat	e:				
Comments:						······	

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
1227 DONA WAY	Policy Number:
City: NOKOMIS State: FL ZIP Code: 34275	Company NAIC Number:
SECTION G - COMMUNITY INFORMATION (RECOMMENDED FOR COMMUNITY	TY OFFICIAL COMPLETION)
The local official who is authorized by law or ordinance to administer the community's floodplain ma Section A, B, C, E, G, or H of this Elevation Certificate. Complete the applicable item(s) and sign be	anagement ordinance can complete elow when:
G1. The information in Section C was taken from other documentation that has been signed engineer, or architect who is authorized by state law to certify elevation information. (Included elevation data in the Comments area below.)	
G2.a. A local official completed Section E for a building located in Zone A (without a BFE), Zo E5 is completed for a building located in Zone AO.	ne AO, or Zone AR/AO, or when item
G2.b. A local official completed Section H for insurance purposes.	
G3. In the Comments area of Section G, the local official describes specific corrections to the	e information in Sections A, B, E and H.
G4. The following information (Items G5–G11) is provided for community floodplain manage	
G5. Permit Number: \$23.148375B1 G6. Date Permit Issued: 10/12/20	123
G7. Date Certificate of Compliance/Occupancy Issued:	
G8. This permit has been issued for: X New Construction Substantial Improvement	
G9.a. Elevation of as-built lowest floor (including basement) of the building:	meters Datum:
G9.b. Elevation of bottom of as-built lowest horizontal structural member:	meters Datum:
G10.a. BFE (or depth in Zone AO) of flooding at the building site:	meters Datum:
G10.b. Community's minimum elevation (or depth in Zone AO) requirement for the lowest floor or lowest horizontal structural member:	meters Datum:
G11. Variance issued? Yes No If yes, attach documentation and describe in the Cor	
The local official who provides information in Section G must sign here. I have completed the inform correct to the best of my knowledge. If applicable, I have also provided specific corrections in the C	nation in Section G and certify that it is
Local Official's Name: Ember Dunn Title:	
NFIP Community Name:	
Telephone: Ext.: Email:	
Address:	
City: State:	ZIP Code:
Signature:	25
Comments (including type of equipment and location, per C2.e; description of any attachments; and Sections A, B, D, E, or H):	d corrections to specific information in

1227 DONA WAY	Apt., Unit, Suite, and/or Bidg. No.	.) or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
City: NOKOMIS	State: FL	ZIP Code: 34275	Policy Number:
			Company NAIC Number:
		OOR HEIGHT INFORMATION FOR INSURANCE PURPOSE	
to determine the building's first flo nearest tenth of a foot (nearest te	oor height for insurance purpose enth of a meter in Puerto Rico). I	es. Sections A, B, and I must also	y complete Section H for all flood zones be completed. Enter heights to the Diagrams (at the end of Section H complete this section.
H1. Provide the height of the top	of the floor (as indicated in Fou	undation Type Diagrams) above th	e Lowest Adjacent Grade (LAG):
a) For Building Diagrams 1 floor (include above-grade flo crawlspaces or enclosure flo		om feet	☐ meters ☐ above the LAG
	2A, 2B, 4, and 6–9. Top of next ove basement, crawlspace, or		meters above the LAG
H2. Is all Machinery and Equipm H2 arrow (shown in the Foun Yes No	ent servicing the building (as lis dation Type Diagrams at end o	sted in Item H2 instructions) eleva of Section H instructions) for the ap	ted to or above the floor indicated by the opropriate Building Diagram?
SECTION I - PROPI	ERTY OWNER (OR OWNER	R'S AUTHORIZED REPRESEI	NTATIVE) CERTIFICATION
	st of my knowledge. Note: If the		st sign here. The statements in Sections cial completed Section H, they should
☐ Check here if attachments are	provided (including required pl	hotos) and describe each attachm	ent in the Comments area.
Property Owner or Owner's Author	orized Representative Name:		
Address:			
City:		State:	ZIP Code:
Telephone:	Ext.: Email:		
· ·			
Signature:		Date:	
		Date:	
Signature:		Date:	

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11 BUILDING PHOTOGRAPHS

See Instructions for Item A6.

Building Street Address (including Apt., U	nit, Suite, and/or Blo	ig. No.)	or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
1227 DONA WAY City: NOKOMIS	State:	FL	ZIP Code: 34275	Policy Number: Company NAIC Number:
				Company 14 to Hamber.

Instructions: Insert below at least two and when possible four photographs showing each side of the building (for example, may only be able to take front and back pictures of townhouses/rowhouses). Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." Photographs must show the foundation. When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo One

Photo One Caption: FRONT VIEW - IMAGE TAKEN 01/07/2025

Clear Photo One



Photo Two

Photo Two Caption: REAR VIEW - IMAGE TAKEN 01/07/2025

Clear Photo Two

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11 BUILDING PHOTOGRAPHS

Continuation Page

Building Street Address (including Apt., Unit, Suit	te, and/or Blo	dg. No.)	or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
1227 DONA WAY				Policy Number:
City: NOKOMIS	State: _	FL	ZIP Code: <u>34275</u>	Company NAIC Number:

Insert the third and fourth photographs below. Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo Three

Photo Three Caption: LEFT VIEW (FROM FRONT) - IMAGE TAKEN 01/07/2025

Clear Photo Three



Photo Four

Photo Four Caption: RIGHT VIEW (FROM FRONT) - IMAGE TAKEN 01/07/2025

Clear Photo Four



ICC-ES Evaluation Report

ESR-4332

Reissued March 2024

This report also contains:

Revised June 2024

- CBC Supplement

Subject to renewal March 2026

- FBC Supplement

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.

Copyright © 2024 ICC Evaluation Service, LLC. All rights reserved.

DIVISION: 08 00 00— OPENINGS

Section: 08 95 43— Vents / Foundation Flood Vents REPORT HOLDER: SMART PRODUCT INNOVATIONS, INC. **EVALUATION SUBJECT:**

FREEDOM FLOOD VENT® AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608



1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2024, 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2024, 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)

Properties evaluated:

- Physical operation
- Water flow
- Weathering

2.0 USES

The model FFV–1608 Freedom Flood Vent® is used to equalize hydrostatic pressure on walls of enclosures subject to rising or falling floodwaters. With the cover removed, the model FFV-1608 also provides natural air ventilation.

3.0 DESCRIPTION

3.1 General:

The model FFV-1608 Freedom Flood Vent® is an engineered mechanically operated in-wall flood vent (FV) that automatically allows floodwater to enter an enclosed area and exit. The FV is comprised of a polycarbonate frame with mounting flange and a polycarbonate horizontally pivoting door. When subjected to rising water, the model FFV-1608 Freedom Flood Vent® door is activated and pivots to allow water and debris to flow in either direction to equalize hydrostatic pressure from one side of the enclosure to the other. The FV features a removable polycarbonate cover. The FV door will activate and pivot when subjected to rising water with or without the polycarbonate cover installed.

3.2 Engineered Opening:

The FV complies with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/ SEI 24-14 (2024, 2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/ SEI 24, Freedom Flood Vent® FVs must be installed in accordance with Section 4.0 below. See Table 1 for vent size and maximum allowable area coverage for a single vent.

4.0 DESIGN AND INSTALLATION

The model FFV-1608 Freedom Flood Vent® is designed to be installed into walls or overhead doors of existing or new construction. Installation of the vent must be in accordance with the manufacturer's instructions, the applicable code, and this report. In order to comply with the engineered opening design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/ SEI 24-14 (2024, 2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Freedom

Flood Vent® must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 250 square feet (23.2 m2) of enclosed area.
- Below the base flood elevation.
- With the bottom of the vent located a maximum of 12 inches (305.4 mm) above the higher of the final interior grade or floor and the finished exterior grade immediately under each opening.

5.0 CONDITIONS OF USE:

The Freedom Flood Vent® described in this report complies with, or is a suitable alternative to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The model FFV-1608 Freedom Flood Vent® unit must be installed in accordance with this report, the applicable code and the manufacturer's published installation instructions. In the event of a conflict, the instructions in this report shall govern.
- 5.2 The model FFV-1608 Freedom Flood Vent® unit must not be used in place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.
- 5.3 Use of the Freedom Flood Vent as under-floor space ventilation is outside the scope of this report.
- 5.4 FFV-1608 Freedom Flood Vent® is manufactured in Gastonia, North Carolina under a quality control program with inspections by ICC-ES.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2024).

7.0 IDENTIFICATION

- 7.1 The ICC-ES mark of conformity, electronic labeling, or the evaluation report number (ICC-ES ESR-4332) along with the name, registered trademark, or registered logo of the report holder must be included in the product label.
- 7.2 In addition, the Freedom Flood Vent® model described in this report must be identified by a label bearing the manufacturer's name (Smart Product Innovations, Inc.) and the evaluation report number (ESR-4332).
- 7.3 The report holder's contact information is the following:

SMART PRODUCT INNOVATIONS, INC. 19 MANTUA ROAD MOUNT ROYAL, NEW JERSEY 08061 (800) 507-1527

www.freedomfloodvent.com info@freedomfloodvent.com

TABLE 1-FREEDOM FLOOD VENT®

MODEL NAME MODEL NUMBER		MODEL SIZE	COVERAGE ¹ (ft ²)	
Freedom Flood Vent®	FFV-1608	15 ³ / ₄ " × 8 ¹ / ₁₆ "	250	

For SI: 1 inch = 25.4 mm

¹The enclosed coverage area in square feet is equivalent to the performance of the same number of square inches of non-engineered openings.

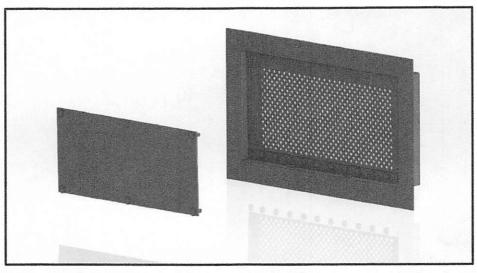


FIGURE 1-MODEL FFV-1608 FREEDOM FLOOD VENT®: SHOWN WITH COVER REMOVED

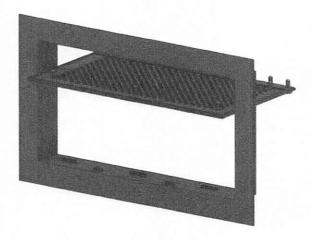


FIGURE 2-MODEL FFV-1608 FREEDOM FLOOD VENT®: SHOWN WITH FLOOD DOOR PIVOTED OPEN



ICC-ES Evaluation Report

ESR-4332 CBC and CRC Supplement

Reissued March 2024 Revised June 2024 This report is subject to renewal March 2026.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT® AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that the Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in ICC-ES evaluation report ESR-4332, has also been evaluated for compliance with codes noted below.

Applicable code editions:

■ 2022 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Planning and Development (OSHPD) AKA: California Department of Health Care Access and Information (HCAI) and the Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

■ 2022 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with CBC Chapter 12 provided the design and installation are in accordance with the 2021 International Building Code® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

- 2.1.1 OSHPD: The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.
- 2.1.2 DSA: The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

2.2 CRC:

The Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with the CRC, provided the design and installation are in accordance with the 2021 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued March 2024 and revised June 2024.





ICC-ES Evaluation Report

ESR-4332 FBC Supplement

Reissued March 2024 Revised June 2024 This report is subject to renewal March 2026.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT® AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in ICC-ES evaluation report ESR-4332, has also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2023 Florida Building Code—Building
- 2023 Florida Building Code—Residential

2.0 CONCLUSIONS

The Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with the Florida Building Code—Building and the Florida Building Code—Residential, provided the design requirements must be determined in accordance with the Florida Building Code—Building and the Florida Building Code—Residential, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-4332 for the 2021 International Building Code® (IBC) meet the requirements of Florida Building Code—Building and the Florida Building Code-Residential, as applicable.

Use of the Freedom Flood Vent® Automatic Foundation Flood Vent; Model FFV-1608 has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official, when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued March 2024 and revised June 2024.

