950 5048



ELEVATION CERTIFICATE

O M B No 3067-0077 Expires May 31, 1993

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate coes not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME	POLICY NUMBER
OAK STURES DEVELOPMENT COR	20,
STREET ADDRESS (Including Ap: Unit. Suite and or Bidg. Number) OR P.O. ROUTE AND BOX	NUMBER COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Biock Numbers, etc.) OT 8, BLOCK A, TOWNS ENG	o Jucres
OSPRE'I	STATE ZIP CCDE
SECTION B FLOOD INSURANCE RATE M	AP (FIRM) INFORMATION
Provide the following from the proper FIRM (See Instructions):	
1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FI	FIRM INDEX 5. FIRM ZONE 6. BASE FLOOD ELEVATION (in AO Zones, use people)
125144 0236 D SEPT.3,1	
 Indicate the elevation datum system used on the FIRM for Base Flood Elev For Zones A or V, where no BFE is provided on the FIRM, and the community becommunity's BFE:	nity has established a BFE for this building site, indicate
SECTION C BUILDING ELEVATION	ON INFORMATION
describes the subject building's reference level 2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference of feet NGVD (or other FIRM datum—see Section B, Itel (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest has the selected diagram, is at an elevation of feet NGVD (c). FIRM Zone A (without BFE). The floor used as the reference level from below (check one) the highest grade adjacent to the building.	or other FIRM datum—see Section B, Item 7).
(d). FIRM Zone AO. The floor used as the reference level from the selected one) the highest grade adjacent to the building. If no flood depth number level) elevated in accordance with the community's floodplain management.	er is available, is the building's lowest floor (reference
 Indicate the elevation datum system used in determining the above referent under Comments on Page 2). (NOTE: If the elevation datum used in meather FIRM [see Section B. Item 7], then convert the elevations to the datus equation under Comments on Page 2.) 	asuring the elevations is different than that used on m system used on the FIRM and show the conversion
4. Elevation reference mark used appears on FIRM: Yes No (See In:	structions on Page 4)
5. The reference level elevation is based on: actual construction cor (NOTE: Use of construction drawings is only valid if the building does not case this certificate will only be valid for the building during the course of co will be required once construction is complete.)	yet have the reference level floor in place, in which
The elevation of the lowest grade immediately adjacent to the building is: _ Section B, Item 7).	7 .L feet NGVD (or other FIRM datum-see
SECTION D COMMUNITY IN	NFORMATION ;
If the community official responsible for verifying building elevations specific	ies that the reference level indicated in Section C. Item 1

is not the "lowest floor" as defined in the community's floodolain management


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6. 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

ERTIFIER'S NAME		LICENSE NUMBE	R (or Attix Sea!)		-
WILLIAM R.	CNIGHT, JR	, PSM *	4551		
		COMPANY NAME	1204		
WHER		B&C Sueve	EYING		
398V, 15	B	CITY		STATE	ZIP
SIGNATURE	YER RO.	SARASOTA		FL	3423
The state of the s		9/29/9	PHO	ME) QZ	-4297
		116717			
Copies should be made of	his Carlificate for all			1) 7 21	16//
Copies should be made of t	his Certificate for: 1)	community official, 2) Insurance		and 3) buildi	ing owner.
•	his Certificate for: 1)			and 3) buildi	ing owner.
Copies should be made of to	his Certificate for: 1)			and 3) buildi	ing owner.
•	his Certificate for: 1)			and 3) buildi	ing owner.
•	his Certificate for: 1)			and 3) buildi	ing owner.
•				and 3) buildi	ing owner.
•				and 3) buildi	ing owner.
•				and 3) buildi	ing owner.

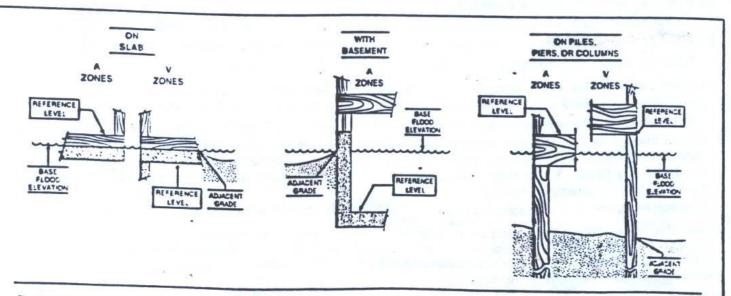

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.