
9505641



ELEVATION CERTIFICATE

O M B No 3067-0077 Expires May 31, 1993

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

	SECTION A PRO	OPERTY INFO	RMATION		FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME			0		POLICY NUMBER
STREET ADDRESS (Including Ap	1. Unit Suite and or Bidg 1	OPMENT Number) OR P.O. F	OUTE AND BOX NUMBER		COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and I	Block Numbers, etc.)		S-END SHOP	760	
CITY	OCK 14)	10 MMS	CND DAG	STATE	ZIP CCDE
OSPRET				+(
			NCE RATE MAP (FIRM)	INFORMATION	
Provide the following from t	ne proper FIRM (See	Instructions):			
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use peom)
125144	0236	0	Ser. 3, 1992	AIZ	11.0
 Indicate the elevation dat For Zones A or V, where the community's BFE: 	no BFE is provided o	n the FIRM, ar	nd the community has est	ablished a BFE f	Other (describe on back) or this building site, indicate
	SECTION	ON C BUILDI	NG ELEVATION INFORM	MATION	2
1. Using the Elevation Cert describes the subject by 2(a). FIRM Zones A1-A30, of	idding's reference levents. AE, AH, and A (with Interpretation of Levents.) BE at an elevation of Levents. BEE). The floor user	BFE). The top RM datum—see The bottom of the control of the contr	of the reference level floo Section B, Item 7). of the lowest horizontal st feet NGVD (or other FIF nce level from the selecte	or from the select ructural member RM datum-see S	of the reference level from ection B, Item 7).
(d). FIRM Zone AO. The one) the highest grade level) elevated in accordance of the elevation da under Comments on Pay the FIRM [see Section equation under Comments of the Elevation reference markets.]	e adjacent to the build ordance with the commentum system used in dige 2). (NOTE: If the B. Item 7], then convents on Page 2.)	ling. If no flood munity's floodpl letermining the elevation daturent the elevation	d depth number is available in management ordinar above reference level elemnsed in measuring the instantion to the datum system united to the datum system united in the system system united in the system syste	le, is the building ce? Yes Sevations: NG elevations is differed on the FIRM	y's lowest floor (reference No Unknown VD '29 Other (describe erent than that used on
4. Elevation reference man					9
5. The reference level elev (NOTE: Use of construct case this certificate will o will be required once con	tion drawings is only nly be valid for the bu	valid if the build uilding during th	ding does not yet have th	e reference level A post-construc	ction Elevation Certificate
6. The elevation of the low Section B, Item 7).	est grade immediately	adjacent to th	e building is:7	L feet NGVD	(or other FIRM datum-see
	s	ECTION D CO	OMMUNITY INFORMATI	ON /	
1. If the community official	responsible for verifyi	ing building ele	vations specifies that the	reference level i	ndicated in Section C. Item 1
is not the "lowest floor" a	as defined in the com	munity's floodp	lain management ordinar	ice, the elevation	of the building's "lowest


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30. AE. AH, A (with BFE),V1–V30.VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	LICEN	SE NUMBER (or Atta Seat)		
MILLIAM R. KN	IGHT, da. P.	SM # 4554		
	COMPANY NAME	7554		
OWNER	RIC	SURVEYING		
ADDRESS	СПУ	SUCCESTING	X	
SIGNATURE JANYER	D		STATE	ZIP
SIGNATURE /	KO. SARASOTA		FC	217
6 MA		diam 1	DNE 2	040
100	9	179199 16	01, 100,	4797
- //				
Copies should be made of this Co	artificate found)		11/1/2/	4671
Copies should be made of this C	ertificate for: 1) community official, 2) in	surance agent/company	and 3) building	owner.
	ertificate for: 1) community official, 2) in	surance agent/company	, and 3) building	owner.
	ertificate for: 1) community official, 2) in	surance agent/company	, and 3) building	owner.
Copies should be made of this Comments:	ertificate for: 1) community official, 2) in	surance agent/company	, and 3) building	owner.
	ertificate for: 1) community official, 2) in	surance agent/company	, and 3) building	owner.
	ertificate for: 1) community official, 2) in	surance agent/company	, and 3) building	owner.
	ertificate for: 1) community official, 2) in	surance agent/company	, and 3) building	owner.
		surance agent/company	, and 3) building	owner.
		surance agent/company	, and 3) building	owner.
		surance agent/company	, and 3) building	owner.
		surance agent/company	, and 3) building	pwner.

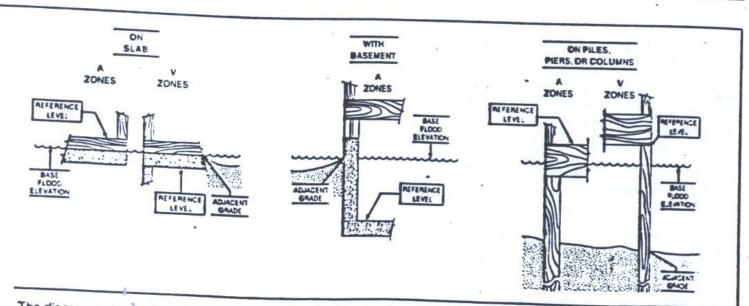

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones. Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal etractural manual and the lowest horizontal etractural manual ma