ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

MPORTANT: In these spaces, copy to	he corresponding inform	nation from Section A.	FOR IN	SURANCE COMPANY USE
Building Street Address (including Apt., 2055 Lemon St.	Unit, Suite, and/or Bldg.	No.) or P.O. Route and E	ox No. Policy N	lumber: White is a 12 in the control of the control
City Englewood	State Florida	ZIP Code 34223	Compar	ny NAIC Number
dasinised	SECTION G - COMMUN	ITY INFORMATION (OF	TIONAL)	DES.
The local official who is authorized by I Sections A, B, C (or E), and G of this E used in Items G8–G10. In Puerto Rico G1. The information in Section C engineer, or architect who is	Elevation Certificate. Componly, enter meters. was taken from other documents authorized by law to certificate.	plete the applicable items	s) and sign below. C n signed and sealed	theck the measurement by a licensed surveyor,
data in the Comments area b G2. A community official complet or Zone AO. G3. The following information (Ite	ed Section E for a building			
G4. Permit Number	G5. Date Permi	it Issued	G6. Date Cert Compliano	ficate of ce/Occupancy Issued
G7. This permit has been issued for:	New Construction	on Substantial Impro	vement .	e un il mont grichmas e un il mont grichmas
G8. Elevation of as-built lowest floor (of the building:	including basement)	s cox	☐ feet ☐ mete	ers Datum
G9. BFE or (in Zone AO) depth of flooG10. Community's design flood elevation	6. total en s 14. Alembiose no ens 3 bas. Al Alembios	O chill 101 PANER THE SHORESTS AND	feet mete	The property transport of the control of the contro
Local Official's Name		Title	100 P 201 D5 V 2018 D	er ingery Ownshoring was an
Community Name	All	Telephone		S Panas
Signature		Date		21 290 - 3
Comments (including type of equipmen	t and location, per C2(e),	if applicable)		
				Check here if attachments.

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the correspondir	ng information from Sec	ction A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/2055 Lemon St.	or Bldg. No.) or P.O. Rou	ite and Box No.	Policy Number:
•	tate ZIP orida 342	Code 23	Company NAIC Number
SECTION E – BUILDING ELE FOR ZONE	VATION INFORMATIO AO AND ZONE A (WIT	N (SURVEY NOT HOUT BFE)	REQUIRED)
For Zones AO and A (without BFE), complete Items E1–complete Sections A, B,and C. For Items E1–E4, use na enter meters.			
E1. Provide elevation information for the following and of the highest adjacent grade (HAG) and the lowest act a) Top of bottom floor (including basement,		ces to show whethe	r the elevation is above or below
crawlspace, or enclosure) is b) Top of bottom floor (including basement,		☐ feet ☐ meter	s above or below the HAG.
crawlspace, or enclosure) is		feet meter	1
E2. For Building Diagrams 6–9 with permanent flood op the next higher floor (elevation C2.b in	enings provided in Section		
the diagrams) of the building is E3. Attached garage (top of slab) is		☐ feet ☐ meter	
E4. Top of platform of machinery and/or equipment servicing the building is		☐ feet ☐ meter	
E5. Zone AO only: If no flood depth number is available floodplain management ordinance? Yes	, is the top of the bottom No Unknown. The	floor elevated in ac	
SECTION F - PROPERTY OWN	ER (OR OWNER'S REP	RESENTATIVE) C	ERTIFICATION
The property owner or owner's authorized representative community-issued BFE) or Zone AO must sign here. The	e who completes Section e statements in Sections	s A, B, and E for Zo A, B, and E are cor	one A (without a FEMA-issued or rect to the best of my knowledge.
Property Owner or Owner's Authorized Representative's	Name		
Address	City	St	ate ZIP Code
Signature	Date	Тє	elephone
Comments			
·			
			Check here if attachments.

U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

					FOR INSUF	RANCE COMPANY USE	
A1. Building Owner's Name Michael & Mary McCormick	•			-	Policy Num	ber:	
A2. Building Street Address (inc Box No. 2055 Lemon St.	cluding Apt., Unit, Suite	e, and/o	r Bldg. No.) o	r P.O. Route and	Company N	AIC Number:	
City Englewood			State Florida		ZIP Code 34223		
A3. Property Description (Lot a Lot 7/Block 41/Manasota Land		x Parcel	Number, Le	gal Description, et	c.)		
A4. Building Use (e.g., Resider	ntial, Non-Residential,	Addition,	, Accessory,	etc.) Residentia	al		
A5. Latitude/Longitude: Lat. 2	7°00'35"	Long. 82	2°24'19"	Horizonta	Datum: NAD 1	927 🗵 NAD 1983	
A6. Attach at least 2 photograp	hs of the building if the	e Certific	ate is being u	sed to obtain floo	d insurance.		
A7 Building Diagram Number	1B						
A8. For a building with a crawls	pace or enclosure(s):						
a) Square footage of crawl	space or enclosure(s)			N/A sq ft			
b) Number of permanent flo	ood openings in the cra	wispace	e or enclosure	=(s) within 1.0 foot	above adjacent gra	ade N/A	
c) Total net area of flood o	penings in A8.b		N/A sq in	l			
d) Engineered flood openir	ngs? 🗌 Yes 🗵 N	lo					
A9. For a building with an attack	ned garage:		٠.				
a) Square footage of attached garage 424.00 sq ft							
b) Number of permanent flo	ood openings in the att	ached g	arage within	1.0 foot above adj	acent grade 3		
c) Total net area of flood o	penings in A9.b		660.00 sq	in			
d) Engineered flood openings? 🗵 Yes 🗌 No							
SI	CTION B - FLOOD I	NSURA	NCE RATE	MAP (FIRM) INF	ORMATION	.	
B1. NFIP Community Name & C Sarasota County 125144	Community Number		B2. County Sarasota	Name		B3. State Florida	
B4. Map/Panel B5. Suffix Number	B6. FIRM Index Date	Effe	RM Panel ective/ vised Date	B8. Flood Zone(s)	B9. Base Flood E (Zone AO, us	levation(s) e Base Flood Depth)	
12115C0344 F	11-04-2016	11-04-2		AE	11'		
B10. Indicate the source of the		1			l in Item B9:		
☐ FIS Profile ☒ FIRM	Community Deterr	ninea [Otner/Sou	rce:			
B11. Indicate elevation datum (used for BFE in Item B	9: 🗌 N	GVD 1929	⊠ NAVD 1988	Other/Source:		
B12. Is the building located in a	a Coastal Barrier Reso	urces Sy	ystem (CBRS) area or Otherwis	se Protected Area (OPA)? ☐ Yes ☒ No	
Designation Date:		CBRS	☐ OPA				

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.					FOR INSURANCE COMPANY USE			
2055 Lemon St. 9 august augustatura et et et levelloit mastragus					Policy Number:			
	State ZIP Code Florida 34223			Company NAIC Number				
SECTION C - BUILDING	ELEVATION INFOR	MATION (SURVEY	REQUIRE	D)				
C1. Building elevations are based on: Constru *A new Elevation Certificate will be required whe C2. Elevations – Zones A1–A30, AE, AH, A (with BF Complete Items C2.a–h below according to the benchmark Utilized: NGS PID # AG7846	n construction of the b E), VE, V1–V30, V (wit building diagram specif	h BFE), AR, AR/A, A	R/AE, AR/	'A1–A30, A	ned Construction AR/AH, AR/AO. meters.			
Indicate elevation datum used for the elevations ☐ NGVD 1929 ☒ NAVD 1988 ☐ Oth		pelow.						
Datum used for building elevations must be the s		he BFE.	Sout 8 br	nasol La	averte more en	_		
a) Top of bottom floor (including basement, crave) b) Top of the next higher floor c) Bottom of the lowest horizontal structural mend) Attached garage (top of slab) e) Lowest elevation of machinery or equipment (Describe type of equipment and location in Control of the lowest ediposet (finished) grade post to build	mber (V Zones only) servicing the building Comments)	nuo est harrolla des	N/A N/A 11.0 12.1	Eck the me feet feet feet feet feet feet feet feet	meters meters meters meters meters meters meters meters meters	id.		
 f) Lowest adjacent (finished) grade next to build g) Highest adjacent (finished) grade next to build 	Mile Vicke in Leading is the cone	aual ce to thin 120 Mins	10.5	✓ feet	meters			
h) Lowest adjacent grade at lowest elevation of structural support		gctin	N/A	⊠ feet	meters meters			
SECTION D - SURVEYO	OR, ENGINEER, OR	ARCHITECT CERT	FICATIO	N	9/384111			
This certification is to be signed and sealed by a land I certify that the information on this Certificate representatement may be punishable by fine or imprisonmentation. Were latitude and longitude in Section A provided by Certifier's Name	ents my best efforts to t under 18 U.S. Code, a licensed land survey License Number	interpret the data ava Section 1001. —	ilable. I un	derstand t	ation information that any false e if attachments			
Joseph E. Trott	#5153	305 E 1 67 mm	Laalii.	(AD)				
Title President Company Name Meridian Group of South Florida, Inc. Address 493 Barger Drive, Unit A City	State	ZIP Code		#5	153 5/2020	Li. Ser		
Port Charlotte	Florida	33954	AD 17	7. 3.0	FAEGORIA -	1211		
Signature	Date 10-15-2020	Telephone (941) 766-0011	V 2011 2011		en manat f	1		
Copy all pages of this Elevation Certificate and all attack	hments for (1) communi	ty official, (2) insuranc	e agent/co	mpany, an	d (3) building ov	wner.		
Comments (Including type of equipment and location, Elevation in item C2e refers to an exterior concrete A Flood Vents in A9b have an rated total net coverage of Engineered Flood Vents in are Flood Flaps, LLC Mod	/C pad. of 660.00 sq. in. (3 x 2	20 sq. in. = 660 sq. ir	o 1920 ao 1.) 128001 a m		en tetti i Ha u = 1 = 6 Taharenal	Đ		

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the c	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., Unit 2055 Lemon St.	, Suite, and/or Bldg. No.)	or P.O. Route and Box No.	Policy Number: Share and problem
City respect Osald viscore s	State	ZIP Code	Company NAIC Number
Englewood	Florida	34223	Englewood

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

Photo One Caption Front View 10/08/2020

Clear Photo One



Photo Two

Photo Two Caption Rear View 10/08/2020

Clear Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the	FOR INSURANCE COMPANY USE			
Building Street Address (including Apt., Ur 2055 Lemon St.	Policy Number:			
City Englewood	State Florida	ZIP Code 34223	Company NAIC Number	Maria Maria

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption Side View 10/08/2020

Clear Photo Three

Photo Four

Photo Four

Photo Four Caption

Clear Photo Four Form Page 6 of 6



ICC-ES Evaluation Report

ESR-3560

Reissued September 2020

This report is subject to renewal September 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC

EVALUATION SUBJECT:

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012 and 2009 International Building Code[®] (IBC)
- 2018, 2015, 2012 and 2009 International Residential Code[®] (IRC)

Properties evaluated:

- Physical operation
- Water flow
- Weathering

2.0 USES

Flood Flaps® automatic flood vents are used to provide for the equalization of hydrostatic flood forces on exterior walls. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

Flood Flaps® automatic flood vents are engineered mechanically operated flood vents (FVs) that automatically allow flood waters to enter and exit enclosed areas. The FVs are constructed of ABS plastic which serves as the FV's housing, and a front grill that contains an anodized metal screen imbedded in polypropylene plastic. On contact with rising flood water, the grill will disengage from its secured position, allowing flood water and debris to flow through in either direction. The FVs are available in two series as described in Section 3.3.

The sealed series models contain two rubber flaps that close the FV to the passage of air when using with conditioned areas or sealed crawl spaces. In the same manner as the grill, the two rubber flaps are pushed open

by water pressure, allowing water and debris to flow through the FV in either direction. See Figure 1 for an illustration of the Flood Flaps® automatic FV.

3.2 Engineered Opening:

The Flood Flaps® automatic FVs comply with the design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 (2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/SEI 24-05 (2012 and 2009 IBC and IRC)] for a rate of rise and fall of 5 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Flood Flaps® automatic FVs must be installed in accordance with Section 4.0.

3.3 Flood Vent Series Models:

Flood Flaps® automatic FVs are available in two series with multiple models and sizes as described in Table 1. The sealed series models, designated FFWF, include two rubber flaps for the prevention of air flow. The multipurpose series, designated FFNF, omits the rubber flaps.

3.4 Natural Ventilation:

Flood Flaps® automatic FV models FFNF12, FFNF08, FFNF05, and FFNF02 have metal screens with 1/4 inch by 1/4 inch (6 mm by 6 mm) openings and provide 37 square inches (0.02 m2) of net free opening to supply natural ventilation for under-floor ventilation. Flood Flaps® automatic FV models FFWF12, FFWF08, and FFWF05 have not been evaluated for use as openings for under-floor ventilation.

4.0 DESIGN AND INSTALLATION

Flood Flaps® automatic FVs are designed to be installed into walls of existing or new construction. Installation of the FVs must be in accordance with the manufacturer's instructions, the applicable code and this report. Flood Flaps® automatic FVs can be installed in wood, masonry and concrete walls up to a thickness of 12 inches (305 mm). In order to comply with the engineered opening design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 (2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/SEI 24-05 (2012 and 2009 IBC and IRC)], the Flood Flaps® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 220 square feet (20 m²) of enclosed area.



- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305 mm) above grade.

5.0 CONDITIONS OF USE

The Flood Flaps® automatic flood vents described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The Flood Flaps® automatic FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- 5.2 The Flood Flaps® automatic FVs must not be used in place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).

7.0 IDENTIFICATION

- 7.1 The Flood Flaps® models recognized in this report are identified by a label bearing the manufacturer's name, the model number, and the evaluation report number (ESR-3560).
- **7.2** The report holder's contact information is the following:

FLOOD FLAPS®, LLC
POST OFFICE BOX 1003
ISLE OF PALMS, SOUTH CAROLINA 29451
(843) 881-0190
www.floodflaps.com
info@floodflaps.com

TABLE 1-FLOOD FLAP AUTOMATIC FLOOD VENT MODEL SIZES

MODEL NUMBER	MODEL DESIGNATION	ROUGH OPENING (Width X Height) (inches)	VENT SIZE (W X H X D) (inches)	ENCLOSED AREA COVERAGE (ft²)	NET FREE AREA OPENING ¹ (in ²)
FFWF12	Sealed Series	16 x 8	15 ⁵ / ₈ X 7 ³ / ₄ X 12	220	NA
FFNF12	Multi-Purpose	16 x 8	15 ⁵ / ₈ X 7 ³ / ₄ X 12	220	37
FFWF08	Sealed Series	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 8	220	NA
FFNF08	Multi-Purpose	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 8	220	37
FFWF05	Sealed Series	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 5	220	NA
FFNF05	Multi-Purpose	16 x 8	$15^{5}/_{8} \times 7^{3}/_{4} \times 5$	220	37

For SI: 1 inch = 25.4 mm; 1 f^{12} = 0.093 m^2

¹For under-floor ventilation only.

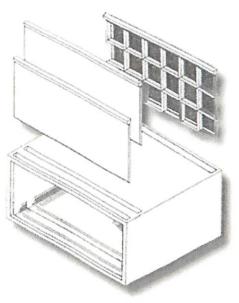


FIGURE 1—FLOOD FLAPS® AUTOMATIC FLOOD VENT

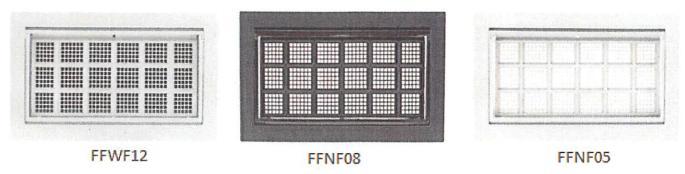


FIGURE 2—FLOOD FLAPS® AUTOMATIC FLOOD VENT SERIES MODELS

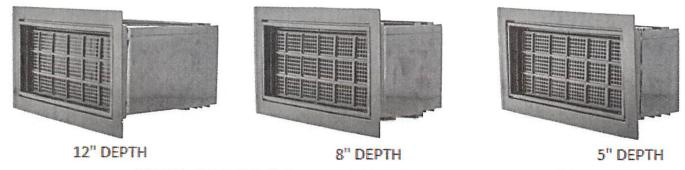


FIGURE 3—FLOOD FLAPS® AUTOMATIC FLOOD VENTS MULTIPLE DEPTH OFFERINGS



ICC-ES Evaluation Report

ESR-3560 CBC and CRC Supplement

Issued September 2020

This report is subject to renewal September 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 88-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC

EVALUATION SUBJECT:

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Flood Flaps® automatic flood vents, described in ICC-ES evaluation report ESR-3560, has also been evaluated for compliance with the code(s) noted below.

Applicable code edition(s):

- 2019 California Building Code (CBC)
- 2019 California Residential Code (CRC)

For evaluation of applicable chapters adopted by the California Office of Statewide Health Planning and Development (OSHPD) and Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

2.0 CONCLUSIONS

2.1 CBC:

The Flood Flaps® automatic flood vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-3560, comply with CBC Chapter 12, provided the design and installation are in accordance with the 2018 International Building Code® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

- 2.1.1 OSHPD: The applicable OSHPD Sections of the CBC are beyond the scope of this supplement.
- 2.1.2 DSA: The applicable DSA Sections of the CBC are beyond the scope of this supplement.

2.2 CRC:

The Flood Flaps® automatic flood vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-3560, comply with 2019 CRC, provided the design and installation are in accordance with the 2018 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report reissued September 2020.





ICC-ES Evaluation Report

ESR-3560 FBC Supplement

Reissued September 2020 This report is subject to renewal September 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC

EVALUATION SUBJECT:

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Flood Flaps® automatic flood vents, described in ICC-ES evaluation report ESR-3560, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

2.0 CONCLUSIONS

The Flood Flaps flood vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-3560, comply with the Florida Building Code—Building and the Florida Building Code—Residential, provided the design and installation are in accordance with the 2015 International Building Code® provisions noted in the evaluation report.

Use of the Flood Flaps flood vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality-assurance program is audited by a quality-assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official, when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued September 2020.

