ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

Check here if attachments.	
	Comments (including type of equipment and location, per C2(e), if applicable)
	Signature
	y Name
	me
meters Datum	esign flood elevation:
meters Datum	G9. BFE or (in Zone AO) depth of flooding at the building site:
meters Datum	G8. Elevation of as-built lowest floor (including basement)
	G7. This permit has been issued for: New Construction Substantial Improvement
Date Certificate of Compliance/Occupancy Issued	G4. Permit Number G5. Date Permit Issued G6. I
ent purposes.	G3. The following information (Items G4–G10) is provided for community floodplain management purposes.
A-issued or community-issued BFE)	G2. A community official completed Section E for a building located in Zone A (without a FEMA-issued or con or Zone AO.
nd sealed by a licensed surveyor, le source and date of the elevation	G1. In the information in Section C was taken from other documentation that has been signed and sealed by a engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and codata in the Comments area below.)
nagement ordinance can complete 1 below. Check the measurement	The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8–G10. In Puerto Rico only, enter meters.
	SECTION G - COMMUNITY INFORMATION (OPTIONAL)
Company NAIC Number	City State ZIP Code Nokomis Florida 34275
FOR INSURANCE COMPANY USE Policy Number.	Building Street Address (including Apt., Unit, Suite, and/or Bidg. No.) or P.O. Route and Box No. 305 Pocono Trail
	INDOPTANT: In these cases constitutions and in the second

U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

ELEVATION CERTIFICATE Important: Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION	VEORMATION		FOR INSUR	FOR INSURANCE COMPANY USE
A1. Building Owner's Name Daniel & Mattee Sablich			Policy Number:	ber
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.	and/or Bldg. No.) or	P.O. Route and	Company N	Company NAIC Number:
305 Pocono Trail				
City Nokomis	State Florida		ZIP Code 34275	
A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Legal Description, etc.)	Parcel Number, Leg	al Description, etc		
١ ،	PID# 0405050010		#160516FNL	
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory,	dition, Accessory, e	etc.) Residential		
A5. Latitude/Longitude: Lat. 27-07-09.8 Lc	Long. 82-26-49.6	Horizontal Datum:	Datum: NAD 1927	927 🛛 NAD 1983
A6. Attach at least 2 photographs of the building if the Certificate is being used to obtain flood insurance	ertificate is being u	sed to obtain flood	insurance.	
A7. Building Diagram Number 1B				
A8. For a building with a crawlspace or enclosure(s):				
a) Square footage of crawispace or enclosure(s)		0.00 sq ft	:	
c) Total net area of flood openings in A8.b 0.00 sq in	0.00 sq in			
d) Engineered flood openings?				
A9. For a building with an attached garage:				
a) Square footage of attached garage	646.80 sq ft			
b) Number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade	hed garage within 1	.0 foot above adja	cent grade 4	
c) Total net area of flood openings in A9.b	512.00 sq in	ā		
d) Engineered flood openings? 🗵 Yes 📋 No				
SECTION B - FLOOD INS	FLOOD INSURANCE RATE I	MAP (FIRM) INFORMATION	DRMATION	
B1. NFIP Community Name & Community Number Sarasota County 125144	B2. County I Sarasota	Name		B3. State Florida
B4. Map/Panel B5. Suffix B6. FIRM Index B:	B7. FIRM Panel Effective/	B8. Flood Zone(s)	B9. Base Flood El (Zone AO, use	B9. Base Flood Elevation(s) (Zone AO, use Base Flood Depth)
12115C 0327 F 11-04-2016 1	11-04-2016	AE	_	10'
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9: ☐ FIS Profile ☒ FIRM ☐ Community Determined ☐ Other/Source:	FE) data or base flood ≀ed ☐ Other/Source:	od depth entered i	in Item B9:	
B11. Indicate elevation datum used for BFE in Item B9: 🔲 NGVD 1929		X NAVD 1988 [Other/Source:	
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OP	æs System (CBRS)	area or Otherwise	Protected Area (C)PA)? ☐ Yes ⊠ No
Designation Date:	CBRS OPA			

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2

OMB No. 1660-0008
Expiration Date: Nove

	Expiration Date: November 30, 2018
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 305 Pocono Trail	FOR INSURANCE COMPANY USE Policy Number:
City State ZIP Code C Nokomis Florida 34275	Company NAIC Number
SECTION E - BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE)	(EQUIRED)
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters.	.OMA or LOMR-F request, ent used. In Puerto Rico only,
 E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG). a) Top of bottom floor (including basement, crawlspace, or enclosure) is 	the elevation is above or below ☐ above or ☐ below the HAG.
feet	
E2. For Building Diagrams 6–9 with permanent flood openings provided in Section A Items 8 and/or 9 (see pages 1. the next higher floor (elevation C2.b in the diagrams) of the building is	(see pages 1–2 of Instructions), ☐ above or ☐ below the HAG.
E3. Attached garage (top of slab) is	☐ above or ☐ below the HAG.
E4. Top of platform of machinery and/or equipment feet meters	above or below the HAG.
E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in accordance with the community's floodplain management ordinance?	tom floor elevated in accordance with the community's The local official must certify this information in Section G.
The property owner or owner's authorized representative who completes Sections A, B, and E for Zone A (without a FEMA-issued or community-issued BFE) or Zone AO must sign here. The statements in Sections A, B, and E are correct to the best of my knowledge.	€ A (without a FEMA-issued or ct to the best of my knowledge.
Owner or Owner's Authorized Representative's Name	
Address City State	e ZIP Code
Signature Teler	Telephone
Comments	12
	☐ Check here if attachments.

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or Bidg. No.) or P.O. Route and Box No. 305 Pocono Trail	Policy Number:
City State ZIP Code Nokomis Florida 34275	Company NAIC Number
FIORICA	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One Caption

Front and Left Side View

Clear Photo One



Photo Two Caption

Rear and Left Side View

Clear Photo Two

Form Page 5 of 6

ELEVATION CERTIFICATE

BUILDING PHOTOGRAPHS

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2018

The state of the s			
Company NAIC Number	ZIP Code 34275	State Florida	Nokomis
Policy Number:	or P.O. Route and Box No.	Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 305 Pocono Trail	Building Street Address (305 Pocono Trail
FOR INSURANCE COMPANY USE	on from Section A.	IMPORTANT: In these spaces, copy the corresponding information from Section A.	IMPORTANT: In these s

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three Caption

Rear and Right Side View

Clear Photo Three



Photo Four Caption

Front and Right Side View

Clear Photo Four

Form Page 6 of 6



Most Widely Accepted and Trusted

CC-ES Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

This report is subject to renewal 02/2019 Reissued 02/2017

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMARTVENT PRODUCTS, INC.

PITMAN, NEW JERSEY 08071 430 ANDBRO DRIVE, UNIT 1

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS:

MODELS #1540-520; #1540-521; #1540-510; #1540-511;

#1540-570; #1540-574; #1540-524; #1540-514



Look for the trusted marks of Conformity

"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



A Subsidiary of



specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a to any finding or other matter in this report, or as to any product covered by the report. recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not







ICC-ES Evaluation Report

ESR-2074

Reissued February 2017

This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 (562) 699-0543

A Subsidiary of the International Code Council®

Section: 08 95 43—Vents/Foundation Flood Vents **DIVISION: 08 00 00-**OPENINGS

REPORT HOLDER:

430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com SMARTVENT PRODUCTS, INC

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2015, 2012, Code® (IBC) 2009 and 2006 International Building
- 2015, 2012, Code® (IRC) 2015, 2009 and 2006 International Residential
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

[†]The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow The natural ventilation. Smart Vent® units are engineered mechanically

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow pressure from one side of the foundation to the other. The V pivoting door is normally held in the closed position by

> vertically arranged openings per unit. Stacking Model #1540-521 units various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Foundation Flood Vents are each contain available 80 5

Engineered Opening:

hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0. The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and RC)] for a maximum rate of rise and fall of 5.0 feet per

ယ Ventilation:

Overhead Door Model #1540-514 both have screen covers with 1/4-inch-by-1/4-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation. Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches SmartVENT® Model #1540-510 and SmartVENT®

4.0 DESIGN AND INSTALLATION

engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows: walls of any thickness. In order to comply with Installation clips allow mounting in masonry and concrete instructions, vents must be in accordance with SmartVENT® construction installed into walls or overhead doors of existing or new from the and FloodVENT® applicable code the exterior side. аге the manufacturer's and this Installation designed report of the ಠ

- With a minimum of two openings on different sides of each enclosed area.
- With With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the smartVENT® Stacking Model #15/10 E4.4 400 square feet (37.2 m²) of enclosed area FloodVENT® Stacking installed with Stacking Wodel a minimum of one FV enclosed area, except that cking Model #1540-511 #1540-521 <u>d</u> must every and
- Below the base flood elevation



■ With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- 5.2 The Smart Vent[®] FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but

are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015.

7.0 IDENTIFICATION

The Smart VENT® models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood-Wall FloodVENT® Overhead Door	1540-574	14"X-8 ³ /4"	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent [®] Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m²

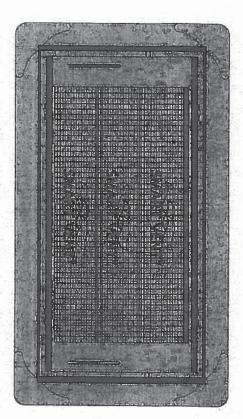


FIGURE 1—SMART VENT: MODEL 1540-510

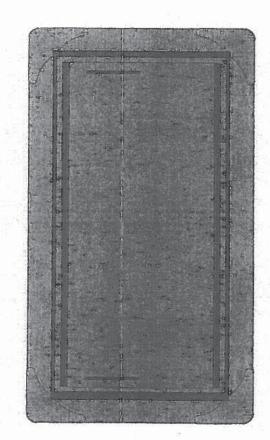


FIGURE 2—SMART VENT MODEL 1540-520

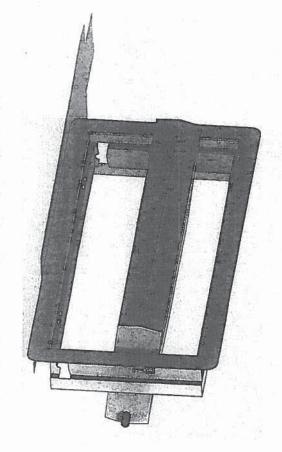


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN