ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corre	sponding information fro	m Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Sui 39 Riverfront Drive	ite, and/or Bldg. No.) or P.0	D. Route and Box No.	Policy Number:
City Venice	State Florida	ZIP Code 34293	Company NAIC Number
SECTION	N G - COMMUNITY INFOR	RMATION (OPTIONAL)	
The local official who is authorized by law or ord Sections A, B, C (or E), and G of this Elevation 0 used in Items G8–G10. In Puerto Rico only, enter	Certificate. Complete the ar	ommunity's floodplain ma oplicable item(s) and sigr	nagement ordinance can complete below. Check the measurement
G1. The information in Section C was take engineer, or architect who is authorize data in the Comments area below.)	d by law to certify elevation	n information. (Indicate th	e source and date of the elevation
G2. A community official completed Section or Zone AO.	n E for a building located ir	n Zone A (without a FEM)	A-issued or community-issued BFE)
G3. The following information (Items G4–G	310) is provided for commu	nity floodplain managem	ent purposes.
G4. Permit Number 20-131067 BA	G5. Date Permit Issued		Date Certificate of Compliance/Occupancy Issued
	New Construction Subs	stantial Improvement	
G8. Elevation of as-built lowest floor (including of the building:	basement)	feet	meters Datum
G9. BFE or (in Zone AO) depth of flooding at th	e building site:	feet	meters Datum
G10. Community's design flood elevation:		feet	meters Datum
Local Official's Name	Title		
Community Name	Tele	ephone	
Signature	Date	е	
Comments (including type of equipment and loca	ition, per C2(e), if applicable	e)	
			Check here if attachments.

U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner

SECTION A – PROPERTY INFORM		FOR INSURANCE COMPANY US
A1. Building Owner's Name Frederick and Deborah Nelson.		Policy Number:
A2. Building Street Address (including Apt., Unit, Suite, and/or Box No.39 Riverfront Drive	Bldg. No.) or P.O. Route and	Company NAIC Number:
City	State	ZIP Code
Venice	Florida	34293
A3. Property Description (Lot and Block Numbers, Tax Parcel Lot 20, Myakka Country Sub.	Number, Legal Description, etc.)	
A4. Building Use (e.g., Residential, Non-Residential, Addition,	· · · · · · · · · · · · · · · · · · ·	letached Garage
A5. Latitude/Longitude: Lat. N.27*-00'-18.8" Long. W.		Datum: NAD 1927 X NAD 1983
A6. Attach at least 2 photographs of the building if the Certifica	ate is being used to obtain flood i	insurance.
A7. Building Diagram Number1A		
A8. For a building with a crawlspace or enclosure(s):		
a) Square footage of crawlspace or enclosure(s)	0.00 sq ft	
b) Number of permanent flood openings in the crawlspace	or enclosure(s) within 1.0 foot al	bove adiacent grade 0
c) Total net area of flood openings in A8.b	0.00 sq in	
d) Engineered flood openings?	'	
A9. For a building with an attached garage:		
	512.00 sq ft	
b) Number of permanent flood openings in the attached ga	·	ent grade 8
	1600.00 sq in	
d) Engineered flood openings? X Yes No		
SECTION B - FLOOD INSURAN	ICE RATE MAP (FIRM) INFOF	RMATION
	B2. County Name	B3. State
Sarasota County 125144	Sarasota	Florida
B4. Map/Panel Number B5. Suffix B6. FIRM Index Date B7. FIRM Effect Revision Revisio		89. Base Flood Elevation(s) (Zone AO, use Base Flood Depth)
12115C0370 F 11-04-2016 11-04-20		7.0'
B10. Indicate the source of the Base Flood Elevation (BFE) data	a or base flood depth entered in	Item RQ-
☐ FIS Profile ☒ FIRM ☐ Community Determined ☐		<u></u>
B11. Indicate elevation datum used for BFE in Item B9: NG	:VD 1929	Other/Source:
	_	
B12. Is the building located in a Coastal Barrier Resources Syst		rotected Area (OPA)? Yes No
Designation Date: CBRS	OPA	

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.	
39 Riverfront Drive	Policy Number:
City State ZIP Code	Company NAIC Number
Venice Florida 34293	
SECTION C - BUILDING ELEVATION INFORMATION (SURVEY F	REQUIRED)
 C1. Building elevations are based on: Construction Drawings* Building Under Const *A new Elevation Certificate will be required when construction of the building is complete. C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/A, AF Complete Items C2.a–h below according to the building diagram specified in Item A7. In Pue Benchmark Utilized: N.G.S, N-697 PID- DL2690 Vertical Datum: N.A.V.D. 1988 	R/AF AR/A1_A30 AR/AH AR/AO
Indicate elevation datum used for the elevations in items a) through h) below.	
☐ NGVD 1929 🗵 NAVD 1988 ☐ Other/Source:	
Datum used for building elevations must be the same as that used for the BFE.	
	Check the measurement used.
a) Top of bottom floor (including basement, crawlspace, or enclosure floor)	6.1 X feet meters
b) Top of the next higher floor	N/A X feet meters
c) Bottom of the lowest horizontal structural member (V Zones only)	N/A X feet meters
d) Attached garage (top of slab)	N/A X feet meters
e) Lowest elevation of machinery or equipment servicing the building (Describe type of equipment and location in Comments)	N/A X feet meters
f) Lowest adjacent (finished) grade next to building (LAG)	5.4 X feet meters
g) Highest adjacent (finished) grade next to building (HAG)	5.5 X feet meters
h) Lowest adjacent grade at lowest elevation of deck or stairs, including structural support	N/A 🛛 feet 🗌 meters
SECTION D - SURVEYOR, ENGINEER, OR ARCHITECT CERTIF	ICATION
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by a certify that the information on this Certificate represents my best efforts to interpret the data available statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.	y law to cartify alayation information
Were latitude and longitude in Section A provided by a licensed land surveyor?	X Check here if attachments.
Certifier's Name License Number	
Warren A. McLeod 4855	A PACE OF A PACE OF THE PACE O
Title Professional Surveyor and Mapper	PEN A MCLANING
Company Name DMK Associates Inc.	Seat
Address 4315 South Access Road	STATE OF FLORIDA
City State ZIP Code Florida 34224	STATE OF FLORIDA SUNGYOT STORY MERCHANISM
Signature Date Telephone 02-02-2021 (941) 475-6596	Ext.
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance	agent/company, and (3) building owner.
Comments (including type of equipment and location, per C2(e), if applicable) The Lat. and Long. Coordinates were determined by a W.A.A.S. enabled hand held GPS unit. The openings contain Engineered Smart Vents model No. 1540-520 rated for 200 square feet of flo ESR-2074. A-9 data is for the detached garage.	
DMK File No. 20-0234 F.B. 21-01 Pg.6	



nakin kanan kenangan dan kenangan kenangan dan penangan dan belangan dan belangan dan belangan dan belangan da Penangangan di penangan kenangan dan belanggan dan penangan penangan dan belanggan dan dan belangan belangan b Penangan belanggan dan belanggan belanggan belanggan dan belanggan belanggan belanggan belanggan belanggan bel

ency from Light of Long many Company of major that in 1900 and 1900 a

g para tanggan ay anggan sa sa anggan tanggan ang anggan ang anggan ang anggan ang

Taranda agus se a a forma a lor com tra africa de la come de la co

्राम् म्हाराज्ञ ने कार्य के अपने के अपने कार्य के अपने के अपने के अपने कार्य

一切解决 《中国》 "我们的是我们的现在分词 "这种"的现在分词 "我们的"的"我们的"。

ા મહિલા કારણ કરે છે. તે તાલુકો કો ફેલ્પમારી તો પાસ્ટ્રોલ કરે જો છે. મહિલા કોર્મિક કે લાભ્યાની હોતા જે સમાને મહિલા પાસ્તી કરો કરો.

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the correspond	ing information from	Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and 39 Riverfront Drive	l/or Bldg. No.) or P.O.	Route and Box No.	Policy Number:
		ZIP Code 34293	Company NAIC Number
SECTION E – BUILDING EL FOR ZONE	EVATION INFORMA AO AND ZONE A (TION (SURVEY NOT WITHOUT BFE)	REQUIRED)
For Zones AO and A (without BFE), complete Items E1 complete Sections A, B,and C. For Items E1–E4, use n enter meters.	–E5. If the Certificate atural grade, if availat	is intended to support a le. Check the measure	LOMA or LOMR-F request, ment used. In Puerto Rico only,
E1. Provide elevation information for the following and the highest adjacent grade (HAG) and the lowest a	check the appropriate djacent grade (LAG).	boxes to show whethe	r the elevation is above or below
 a) Top of bottom floor (including basement, crawlspace, or enclosure) is b) Top of bottom floor (including basement, 			rs above or below the HAG.
crawlspace, or enclosure) is			rs above or below the LAG.
E2. For Building Diagrams 6–9 with permanent flood of the next higher floor (elevation C2.b in the diagrams) of the building is	penings provided in So		
E3. Attached garage (top of slab) is			
E4. Top of platform of machinery and/or equipment servicing the building is			
E5. Zone AO only: If no flood depth number is available floodplain management ordinance? Yes	e, is the top of the bott No Unknown.	om floor elevated in ac	cordance with the community's
SECTION F - PROPERTY OWN	JER (OR OWNER'S R	EPRESENTATIVE) CE	RTIFICATION
The property owner or owner's authorized representative community-issued BFE) or Zone AO must sign here. The	e who completes Sec	tions A. B. and E for Zo	ne A (without a FFMA-issued or
Property Owner or Owner's Authorized Representative's	s Name		
Address	City	Sta	ate ZIP Code
Signature	Date	Tel	lephone
Comments			
			Check here if attachments.

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy	the corresponding information	on from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt 39 Riverfront Drive			Policy Number:
City Venice	State Florida	ZIP Code 34293	Company NAIC Number

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.

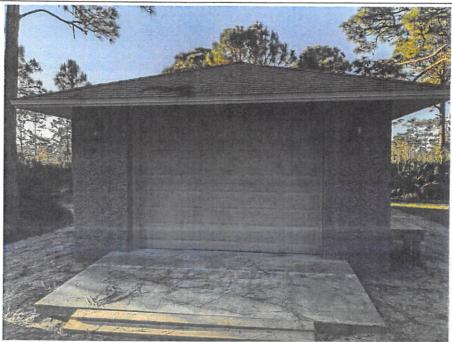


Photo One

Photo One Caption

Front View Taken 01/05/2021

Clear Photo One

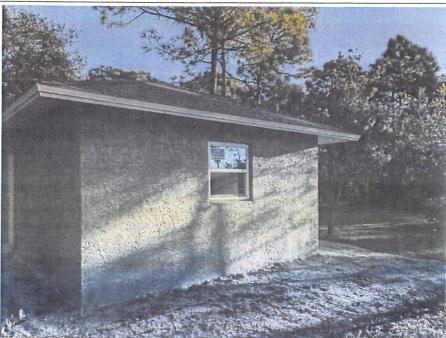


Photo Tw

Photo Two Caption

Rear View Taken 01/05/2021

Clear Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.

39 Riverfront Drive

City

State

ZIP Code
Venice

Florida

State

ZIP Code
34293

Company NAIC Number

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption

Left Side Taken with vents 01/05/2021

Clear Photo Three



. . -

Photo Four Caption

Right Side Taken with Vents 01/05/2021

Clear Photo Four



ICC-ES Evaluation Report

:: Innovation

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2019
This report is subject to renewal 02/2021.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS:
MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574;
#1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence" A Subsidiary of CODE COUNCIL

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





ICC-ES Evaluation Report

ESR-2074

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code[®] (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code[®] (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

[†]The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent[®] units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with \$^1/4\$-inch-by-\$^1/4\$-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square



feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 I/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent[®] FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT [®]	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m2

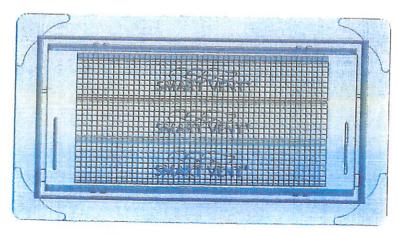


FIGURE 1-SMART VENT: MODEL 1540-510

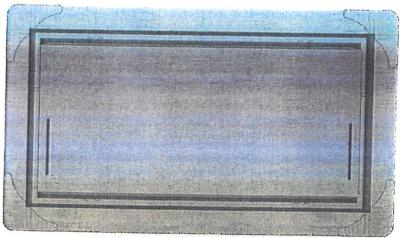


FIGURE 2—SMART VENT MODEL 1540-520

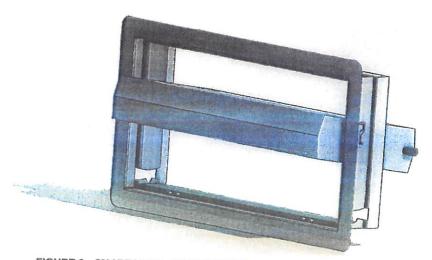


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

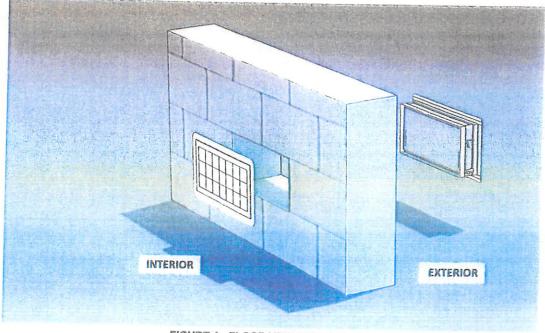


FIGURE 4—FLOOD VENT SEALING KIT



ICC-ES Evaluation Report

ESR-2074 CBC and CRC Supplement

Reissued February 2019

This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 International Building Code® (IBC) provisions noted in the master report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

The products recognized in this supplement have not been evaluated under CBC Chapter 7A for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 International Residential Code® (IRC) provisions noted in the master report.

The products recognized in this supplement have not been evaluated under 2016 CRC Chapter R337, for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

The products recognized in this supplement have not been evaluated for compliance with the International Wildland–Urban Interface $\mathsf{Code}^{\mathbb{Q}}$.

This supplement expires concurrently with the master report, reissued February 2019.



ESR-2074 FBC Supplement

Reissued February 2019

This report is subject to renewal February 2021.

A Subsidiary of the International Code Council®

ICC-ES Evaluation Report

WWW.icc-es.org | (800) 423-6587 | (562) 699-0543

Section: 08 95 43—Vents/Foundation Flood Vents

керокт носрек:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-510; #1540-516; #1

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation are in secondance with the 2015 International Building Code® provisions noted in the master report.

Use of the Smart Vent® Automatic Foundstion Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building Code—Building Code—Residential.

For products falling under Florids Rule 9N-3, verification that the report holder's quality assurance program is sudited by a quality assurance entity approved by the Florids Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the master report, reissued February 2019.