L/C 99-02-51

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY
NATIONAL FLOOD INSURANCE PROGRAM

O.M.B. No. 3067-0077 Expires July 31, 1999

TENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION FOR INSURANCE CARRANT USE STREET ADDRESS (Including Apr., Unit, Bullis marker) Billip Numbers) OR R.O. ROUTE AND BOX NUMBER 1 707 SAND P.O. PCAC_LAUE OTHER DESCRIPTION (Let and Block Numbers, etc.) C+ 30 LATER FRONT ESTATES, UNIT Z DITY NOKOMIS SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION Trovide the following from the proper FIRM (See Instructions): 1. COMAINITY NUMBER 2. PANE, NUMBER 3. SUFFIX 7. A DATE OF FIRM NOEX 5. FIRM 20NE 3. FIRM 20NE 1. SUFFIX 7. TO 20NE A O. TV, Where no BPE is provided on the FIRM and the community has established a BPE for this building site, indicate the elevation datum system used on the FIRM for Base Flood Elevations (ISFE): NORVD 29 Other flosts where the community BPE:							
THE TADRESS (reducing Ap., Unit. sites andre Bidg, Number) OR P.O. ROUTE AND BOX NUMBER # 700 SAND P.O.E.Z. LANE OTHER DESCRIPTION (Lot and Block Numbers, etc.) C+ 30 WATER FADORT STATES, UNIT 2 SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION TOVIde the following from the proper FIRM (See Instructions): 1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX A. DATE OF FIRM NORX 5. FIRM ZONE 1. FIR		SECTION A PRO	PERTY INFO	RMATION		FOR INSURANCE C	OMPANY USE
STREET ADDRESS (reducing Apr. Unit. Suits ander Bidg. Number) OR R.O. ROUTE AND BOX NUMBER # 707 SAND P (PORZ. LAVE) OHER DESCRIPTION (Lot and Block Numbers, etc.) OH 30 LATER_FRONT ESTATES, UNIT 2 SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION FOVIde the following from the proper FIRM (See Instructions): 1. COMMUNITY NUMBER 2. PANEL NUMBER 2. PANEL NUMBER 3. SUPPIX 4. DATE OF FIRM NDEX 5. FIRM ZONE 1. FOZ TONES A OR V, where no BFE is provided on the FIRM for Base Flood Elevations (BFE): MGVD 129 Other (describe on back). For Zones A or V, where no BFE is provided on the FIRM and the community's BFE: LILLILLILLILLILLILLILLILLILLILLILLILLIL	BUILDING OWNER'S NAME						
TOTAL SALO PLOCE LAJE TOTAL SALO PLOCE LAJE TOTAL SOLUTION (as and stable knumbers, see.) Lot 30, Later Frant STATES, UNIT 2 SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION TOVIde the following from the proper FIRM (See instructions): 1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM ZONE 6. 1958 F. 1958							
TOTION TO INSURANCE RATE MAP (FIRM) INFORMATION SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION 1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM ZONE 4. DATE OF SUBJECT VIOLED 4. DATE OF SUBJECT VIOLED 5. DATE OF SUBJEC			umber) OR P.O. I	ROUTE AND BOX NUMBER		COMPANY NAIC NU	MBER
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION 1. COMMUNITY NUMBER 1. PANEL NUMBER 2. SUPPLY 1. COMMUNITY NUMBER 1. PANEL NUMBER 2. SUPPLY 1. SUPPLY 1. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NOVD '29 Other (describe on back describes the subject building's reference level from the selected diagram is at an elevation of LILLIP (19). He flex NOVD (or other FIRM datum—see Section B, Item 7). (b). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level from the selected diagram is at an elevation of LILLIP (19). He flex NOVD (or other FIRM datum—see Section B, Item 7). (c). FIRM Zone A0. The floor used as the reference level from the selected diagram is at an elevation on the highest grade adjacent to the building. (d). FIRM Zone A0. The floor used as the reference level from the selected diagram is level to the highest grade adjacent to the building. (d). FIRM Zone A0. The floor used as the reference level from the selected diagram is level to not the highest grade adjacent to the building. (d). FIRM Zone A0. The floor used as the reference level from the selected diagram is level to one) the highest grade adjacent to the building. (d). FIRM Zone A0. The floor used as the reference level from the selected diagram is level to one) the highest grade adjacent to the building. (d). FIRM Zone A0. The floor used as the reference level from the selected diagram is level to one) the highest grade adjacent to the building. (d). Firm Zone A0. The floor used as the reference level from the selected diagram is level floor from the selected diagram is level for the building. (d). Firm Zone A0. The floor used as the reference level from the selected diagram is level floor from the selected floor f							
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION 1. COMMUNITY NUMBER 2. PANEL NUMBER 2. SUMPLY 4. DATE OF FIRM NOEX 5. FIRM ZONE 1. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): MOVD '29 ther (describe on back as FIRM ZONE) the community as established a BFE for this building site, indicate the community SEE: Limit feet NGVD (or other FIRM datum—see Section B, Itam 7). SECTION C BUILDING ELEVATION INFORMATION Jising the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level L. (26). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of LIMID J. High Evant (A) (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of LIMID J. High Evant (A) (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram is at an elevation of LIMID J. High Evant (A) (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram is LIMID J. Heat NGVD (or other FIRM datum—see Section B, Item 7). (b). FIRM Zone A(). The floor used as the reference level from the selected diagram is LIMID J. Heat D. High Evant (C). FIRM Zone A() (with U) (a) (FIRM Zone A() (T) (FIRM			MITES	UNIT 2			
To community number 2. Panel Number 3. Surfix 4. Date of Firm INDEX 5. Firm Zone 6. Surfix 4. Date of Firm INDEX 5. Firm Zone 6. Surfix 6. Surfix 7. Parel Number 7. Parel				8.	FL.	-3	
1. COMMUNITY NUMBER 1. 2 PANEL NUMBER 1. SUPPLY 1. COMMUNITY NUMBER 1. SUPPLY 1. SUPPLY 1. SUPPLY 1. COMMUNITY NUMBER 1. SUPPLY 1. SUPPL		SECTION B FL	OOD INSURA	ANCE RATE MAP (FIRM)	INFORMATION	N	6
Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE):	rovide the following from the	ne proper FIRM (See	nstructions):			120	
Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE):	1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	- 6. BASE PLOC	ED ELEVATION
I. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: ☐ ☐ ☐ ☐ Heat NGVD (or other FIRM datum—see Section B, Item 7). SECTION C BUILDING ELEVATION INFORMATION Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐	125144	0245	D	9-3-92	"A-12"		
Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level	3. For Zones A or V, where	no BFE is provided or	the FIRM, a	nd the community has esta	ablished a BFE		
describes the subject building's reference level		SECTIO	NC BUILD	ING ELEVATION INFORM	MATION		92
(2(a), FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐				gram number from the diag	rams found on	Pages 5 and 6 th	nat best
of	describes the subject bu	uilding's reference leve	1				
(b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of					r from the selec	cted diagram is a	t an elevation
the selected diagram, is at an elevation of							
(c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is feet above or below (check one) the highest grade adjacent to the building. (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is feet above or below (check one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? Yes No Unknown 3. Indicate the elevation datum system used in determining the above reference level elevations: NGVD '29 Other (describe under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.) 4. Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page 4) 5. The reference level elevation is based on: actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction, is complete.}							
below (check one) the highest grade adjacent to the building. (d), FIRM Zone AO. The floor used as the reference level from the selected diagram is							
(d). FIRM Zone AO. The floor used as the reference level from the selected diagram is feet above or below (checone) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? Yes No Unknown 3. Indicate the elevation datum system used in determining the above reference level elevations: NGVD '29 Other (describe under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.) 4. Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page 4) 5. The reference level elevation is based on: actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)	(c). FIRM Zone A (without	BFE). The floor used	as the refere	ence level from the selecte	d diagram is L		ve 🗌 or
one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? Yes No Unknown Indicate the elevation datum system used in determining the above reference level elevations: WGVD '29 Other (describe under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.) Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page 4) The reference level elevation is based on: Actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete. The elevation of the lowest grade immediately adjacent to the building is: Yes NGVD (or other FIRM datum-see Section B, Item 7). SECTION D COMMUNITY INFORMATION If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the buildings "lowest floor" as defined by the ordinance is: Yes NGVD (or other FIRM datum-see Section B, Item 7).	below [(check one	the highest grade ad	jacent to the	building.			
under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.) 4. Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page 4) 5. The reference level elevation is based on: Actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.) 6. The elevation of the lowest grade immediately adjacent to the building is: Yes NGVD (or other FIRM datum-see Section B, Item 7). SECTION D COMMUNITY INFORMATION If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is: Yes NGVD (or other FIRM datum-see Section B, Item 7). 2. Date of the start of construction or substantial improvement	one) the highest grad- level) elevated in acco	e adjacent to the build ordance with the comm	ing. If no floo nunity's flood;	d depth number is availab plain management ordinan	le, is the buildinge? Yes	ng's lowest floor (No Unkno	reference wn
5. The reference level elevation is based on: actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete. 6. The elevation of the lowest grade immediately adjacent to the building is:	under Comments on Pa the FIRM [see Section equation under Comme	ge 2). (NOTE: If the a B, Item 7], then conve nts on Page 2.)	elevation datu ert the elevati	Im used in measuring the ons to the datum system u	elevations is dif	ferent than that u	ised on
(NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.) 6. The elevation of the lowest grade immediately adjacent to the building is: SECTION D COMMUNITY INFORMATION If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is: [SECTION D COMMUNITY INFORMATION] SECTION D COMMUNITY INFORMATION If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item is not the "lowest floor" as defined by the ordinance is: [SECTION D COMMUNITY INFORMATION] SECTION D COMMUNITY INFORMATION If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item is not the "lowest floor" as defined by the ordinance is: [SECTION D COMMUNITY INFORMATION] SECTION D COMMUNITY INFORMATION SECTION D COMMUNITY INFORMATION	4. Elevation reference mar	k used appears on FII	RM: Yes	No (See Instructions of	n Page 4)		
SECTION D COMMUNITY INFORMATION If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:	(NOTE: Use of constructions of this certificate will of	ction drawings is only only be valid for the bu	valid if the bu ilding during l	ilding does not yet have th the course of construction.	e reference lev	el floor in place, uction Elevation (Certificate
If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:		est grade immediately	adjacent to t	he building is: 1 1 8	1.[7] feet NGV	D (or other FIRM	datum-see
is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is: feet NGVD (or other FIRM datum—see Section B, Item 7). 2. Date of the start of construction or substantial improvement		S	ECTION D	COMMUNITY INFORMATI	ON		
	is not the "lowest floor" floor" as defined by the	as defined in the comporting ordinance is:	munity's flood	plain management ordinar t NGVD (or other FIRM da	nce, the elevation tum—see Section	on of the building	tion C, Item 1 's "lowest
						REVERSE SIDE FOO	CONTINUATIO

C00/700 1

SECTION E CERTIFICATION

his certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.


Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway walt, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be ponishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CENTIFICATION AND CONTRACTOR OF ANIX SOUL	
DANIEL E. LEMONDE # 2909	
TITLE COMPANY NAME	
P.S.M. =- LEMONDE & CO., THE.	
ADDRESS STATE	ZIP
4821 BONATA ROAD VENICE FC.	34293
SIGNATURE (193) OATE 3-1-99 941-493-1	
Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building	ng owner.
1.) LWING AREA Floor ELEV .= + 9.4 feet.	
2.) GARAGE / STORAGE MEA Floor ELEV. + 9.0 feet.	
(HOME BUILT IN: 1977 PER SAR. G. +AX DEPT.)	

3.) ELENS. BASED ON: U.S.C. \$6.5. B.A. NO. 7-252,

Pushismed Elev. = + 10. 404 Cot.

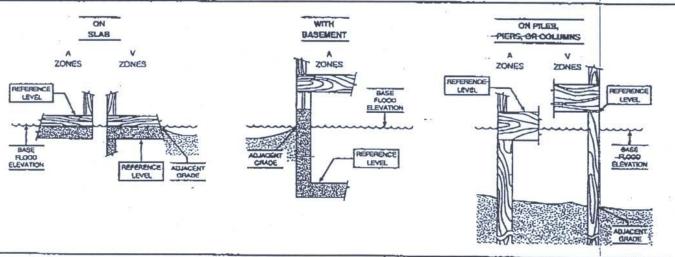

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones. Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.

CERTIFICAS MANA