U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB Control No. 1660-0008 Expiration Date: 06/30/2026

ELEVATION CERTIFICATE

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
A1. Building Owner's Name: KHOMENKO VLADIMIR & KHOMENKO OLENA	Policy Number:
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 1040 SENECA RD	Company NAIC Number:
City: VENICE State: FL 2	ZIP Code: 34293
A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel NumLOTS 19250 & 19251, PID: 0472060074, SOUTH VENICE UNIT 72	nber:
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.): RESIDENTIAL	
A5. Latitude/Longitude: Lat. 27° 01' 54,77" N Long. 82° 24' 49,23" W Horiz. Datum:	NAD 1927 🛛 NAD 1983 🗌 WGS 84
A6. Attach at least two and when possible four clear color photographs (one for each side) of the bu	uilding (see Form pages 7 and 8).
A7. Building Diagram Number:1B	
A8. For a building with a crawlspace or enclosure(s):	
a) Square footage of crawlspace or enclosure(s): N/A sq. ft.	
b) Is there at least one permanent flood opening on two different sides of each enclosed area?	☐ Yes ☐ No N/A
 c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot and Non-engineered flood openings: N/A Engineered flood openings: N/A 	above adjacent grade:
d) Total net open area of non-engineered flood openings in A8.c: N/A sq. in.	
e) Total rated area of engineered flood openings in A8.c (attach documentation - see Instructio	ons): N/A sq. ft.
f) Sum of A8.d and A8.e rated area (if applicable – see Instructions): N/A sq. ft.	
A9. For a building with an attached garage:	
a) Square footage of attached garage: 530.00 sq. ft.	
b) Is there at least one permanent flood opening on two different sides of the attached garage?	Yes No N/A
c) Enter number of permanent flood openings in the attached garage within 1.0 foot above adja Non-engineered flood openings:0 Engineered flood openings:3	acent grade:
d) Total net open area of non-engineered flood openings in A9.c: N/A sq. in.	
e) Total rated area of engineered flood openings in A9.c (attach documentation - see Instructio	ons): 750.00 sq. ft.
f) Sum of A9.d and A9.e rated area (if applicable – see Instructions): N/A sq. ft.	
SECTION B — FLOOD INSURANCE RATE MAP (FIRM) INFOR	RMATION
B1.a. NFIP Community Name: Sarasota County B1.b. NFIP Community Name: Sarasota County	munity Identification Number: 125144
B2. County Name: Sarasota B3. State: FL B4. Map/Panel No.: 1	2115C/0341 B5. Suffix: G
B6. FIRM Index Date: 03/27/2024 B7. FIRM Panel Effective/Revised Date: 03/27/202	24
B8. Flood Zone(s): AE B9. Base Flood Elevation(s) (BFE) (Zone AO, use B	Base Flood Depth): 9.0'
B10. Indicate the source of the BFE data or Base Flood Depth entered in Item B9: ☐ FIS ☐ FIRM ☐ Community Determined ☐ Other:	
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 NAVD 1988 Other/	/Source:
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Prote Designation Date: CBRS DOPA	ected Area (OPA)?
B13. Is the building located seaward of the Limit of Moderate Wave Action (LiMWA)?	No

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

Building Street Address (including Apt., Unit, S 1040 SENECA RD	Suite, and/or Bldg. No.) o	r P.O. Route and Box	No.: FO	RINSL	IRANG	CE C	OMPANY USE
City: VENICE	State: FL	ZIP Code: <u>34293</u>	,	cy Num npany i	_)er:
SECTION C—BI	JILDING ELEVATIO	NINFORMATION (SURVEY REC	UIRE))		
C1. Building elevations are based on: *A new Elevation Certificate will be requ				Fir	nished	Cons	struction
C2. Elevations – Zones A1–A30, AE, AH, A A99. Complete Items C2.a–h below acc Benchmark Utilized: AG784	O, A (with BFE), VE, V cording to the Building I	1–V30, V (with BFE), Diagram specified in It Vertical Datum: <u>NA</u> V	em A7. In Puerte	E, AR// o Rico (A1–A3 only, e	0, AF	R/AH, AR/AO, meters.
Indicate elevation datum used for the elevation NGVD 1929 ⊠ NAVD 1988 □		h) below.					
Datum used for building elevations must be If Yes, describe the source of the conversion			on factor used?	Che	Yes eck the		No asurement use
a) Top of bottom floor (including basem	nent, crawlspace, or en	dosure floor):	11.6		feet		meters
b) Top of the next higher floor (see Inst	ructions):		N/A		feet		meters
c) Bottom of the lowest horizontal struc	tural member (see Inst	ructions):	N/A		feet		meters
d) Attached garage (top of slab):			9.2	<u> </u>	feet		meters
 e) Lowest elevation of Machinery and E (describe type of M&E and location i 			11.;	<u> </u>	feet		meters
f) Lowest Adjacent Grade (LAG) next t	o building: 🔲 Natura	I ⊠ Finished	8.3	<u> </u>	feet		meters
g) Highest Adjacent Grade (HAG) next	to building: Natura	I ⊠ Finished	8.9		feet		meters
 Finished LAG at lowest elevation of support: 	attached deck or stairs	including structural	9.:	3 🛛	feet		meters
SECTION D - S	SURVEYOR, ENGIN	EER, OR ARCHITE	CT CERTIFIC	ATION	[
This certification is to be signed and sealed information. I certify that the information on a false statement may be punishable by fine of the work where latitude and longitude in Section A process Check here if attachments and describe in the section in the s	this Certificate represer or imprisonment under to vided by a licensed lan	ts my best efforts to it 8 U.S. Code, Section	nterpret the data 1001.				
Certifier's Name: GUSTAVO INTERIAN		se Number: PSM 646	61			, Ou	NEO!
Title: PROFESSIONAL SURVEYOR AN			·····	تمحم	351h	se N	Tumber 161
Company Name: LYNX SURVEYORS CO]		, • -		
Address: 302 LAUREL ROAD EAST UN				12 C) <u>5</u>
City: LAUREL		FL ZIP Code: 34	4272	100	\ s	TATE	OF
Telephone: (833) 721-2907 Ext.:	Email: contac	t@lynxsurveyors.co	<u>m</u>	11%	2ne/F	LORI	DA and Re
Signature:		Date: 06/21	1/2024	Profession	10,0	urve	No.
Copy all pages of this Elevation Certificate and	d all attachments for (1)	community official, (2)	insurance agent/	compar	ny, and	i (3) t	ouilding owner.
						$\overline{}$	

Comments (including source of conversion factor in C2; type of equipment and location per C2.e; and description of any attachments): Attached ICC-ES Report No. ESR-4332 for Engineered openings manufactured by Smart Products Innovations Inc., Model number FFV 1608, coverage 250 sq. ft. per unit; A5) Determine by GPS RTK NCCS received; C2 e) Central A/C System on pad, located in the center of the right side of the building; Water Equip. pad Elev.=11.06'; C2 f) g) on grass, source Final Survey with Drainage Elevations; Effective FIRM during permittin construction: B4: 12115C0341, B5: F, B6 and B7: 11/04/2016, B8: AE, B9: 10.0' NAVD1988; Crown of Road Elev.=6.73'; -ORDER No: LS240828

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

	iding Apt., Unit, Suite, and/or Bld	g. No.) (or P.O. Route an	d Bo	x No.:	:	FOR INSURA	ANCE COMPANY USE
1040 SENECA RD				1001			Policy Number	r:
City: VENICE	State:	FL	_ ZIP Code: 34	1293	3		Company NAI	C Number:
SECTIO	ON E — BUILDING MEASUR FOR ZONE AO, ZONE							ED)
For Zones AO, AR/AO, and intended to support a Letter enter meters.	A (without BFE), complete Item of Map Change request, compl	s E1–E	5. For Items E1- tions A, B, and	-E4, C. C	use r heck	natural g the mea	rade, if availab surement used	le. If the Certificate is I. In Puerto Rico only,
•	based on: Construction D will be required when construction	_				struction	n*	ed Construction
	(C.2.a in applicable Building Di or below the natural HAG and t			j and	i ched	ck the ap	propriate boxe	s to show whether the
a) Top of bottom floor (crawlspace, or enclo			[fo	eet	_ ı	meters	above or	below the HAG.
 b) Top of bottom floor (crawlspace, or enclo 			[fo	eet	ı 🗆	meters	above or	below the LAG.
	6–9 with permanent flood openi	ings pro	vided in Section	ı A İt	ems 8	3 and/or	9 (see pages 1	I-2 of Instructions), the
next higher floor (C2.b i Building Diagram) of the			 fo	eet	_ ı	meters	above or	below the HAG.
E3. Attached garage (top of	islab) is:		[fo	eet	_ ı	meters	above or	below the HAG.
E4. Top of platform of mach servicing the building is:				eet	_ ·	meters	above or	below the HAG.
E5. Zone AO only: If no floo floodplain management	od depth number is available, is ordinance?							the community's formation in Section G.
SECTION F P	ROPERTY OWNER (OR OV	NNER"	S AUTHORIZI	ED:F	REPF	RESENT	TATIVE) CER	TIFICATION
	er's authorized representative w					E for Zo	ne A (without E	3FE) or Zone AO must
Check here if attachmen	nts and describe in the Commer	nts area						
Property Owner or Owner's	Authorized Representative Nar	ne:						
Address:								
City:					State	e:	ZIP Code	::
	Ext.: Email:	, •						
Telephone:	LAL LIIIdii							
Telephone: Signature:	LAL		Date:					

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

	uilding Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 040 SENECA RD						FOR INSURANCE COMPANY USE Policy Number:		
City: \	/ENICE s	tate:_	FL	ZIP Code:	34293	Company NAIC Number:			
	SECTION G - COMMUNITY INFORMAT	ION	(RECO	MMENDED	FOR COMMUNI	TY OFFICIA	L COMPLETION)		
	cal official who is authorized by law or ordinand n A, B, C, E, G, or H of this Elevation Certificat						dinance can complete		
G1.	The information in Section C was taken for engineer, or architect who is authorized be elevation data in the Comments area below.	y stat							
G2.a.	A local official completed Section E for a E5 is completed for a building located in 2			ed in Zone A (without a BFE), Zo	one AO, or Zo	ne AR/AO, or when item		
G2.b.	☐ A local official completed Section H for in	suran	ice purpo	ses.					
G3.	☐ In the Comments area of Section G, the I	ocal c	official de	scribes speci	ific corrections to the	he information	in Sections A, B, E and H.		
G4.	☐ The following information (Items G5–G11) is p	rovided f	or community	floodplain manage	ement purpos	es.		
G5.	Permit Number:	_ G	6. Date F	ermit Issued:	:				
G7.	Date Certificate of Compliance/Occupancy Is	sued:	:						
G8.	This permit has been issued for:	onstru	uction [] Substantial	Improvement				
G9.a.	Elevation of as-built lowest floor (including babuilding:	seme	ent) of the	e 	[feet	meters	Datum:		
G9.b.	Elevation of bottom of as-built lowest horizon member:	tal str	uctural			meters	Datum:		
G10.a	. BFE (or depth in Zone AO) of flooding at the	buildi	ng site:		feet	meters	Datum:		
G10.b	 Community's minimum elevation (or depth in requirement for the lowest floor or lowest hor member: 			ral	☐ feet	☐ meters	Datum:		
G11.	Variance issued? ☐ Yes ☐ No If yes.	, attac	ch docum	nentation and	describe in the Co				
The lo	cal official who provides information in Section at to the best of my knowledge. If applicable, I h	G mu	ust sign h	here. <i>I have c</i>	ompleted the infon	mation in Seci	tion G and certify that it is		
Local	Official's Name:			т	"itle:				
NFIP (Community Name:					···			
Teleph	none: Ext.:	Emai	il:						
Addre	ss:		·						
					State:	ZIP Ce	ode:		
Signat	ture:			Da	ite:				
	nents (including type of equipment and location ons A, B, D, E, or H):	, per	C2.e; de	scription of ar	ny attachments; an	id corrections	to specific information in		

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

Building Street Address (inc	cluding Apt., Unit, Suite, a	nd/or Bldg. No.)	or P.O. Route and	Box No.:	FOR IN	SURANCE COMPANY USE
1040 SENECA RD	· · · · · ·				Policy N	umber:
City: VENICE	·	State: FL	_ ZIP Code: <u>34</u>	293	Company NAIC Number:	
SEC	TION H – BUILDING'S (SURVEY NOT R				A CONTRACTOR OF THE STATE OF TH	ZONES
The property owner, owne to determine the building's nearest tenth of a foot (ne <i>Instructions</i>) and the app	s first floor height for insu arest tenth of a meter in	rance purposes. Puerto Rico). Re	Sections A, B, a eference the Fou	nd I must also <i>Indation Typ</i> e	be complete Diagrams	(at the end of Section H
H1. Provide the height of	the top of the floor (as in	dicated in Found	lation Type Diag	rams) above th	e Lowest A	djacent Grade (LAG):
	grams 1A, 1B, 3, and 5- grade floors only for build sure floors) is:				meters	above the LAG
	grams 2A, 2B, 4, and 6- floor above basement, cr				meters	above the LAG
H2. Is all Machinery and H2 arrow (shown in the Yes No	Equipment servicing the ne Foundation Type Diag	building (as liste grams at end of S	d in Item H2 inst Section H instruct	ructions) eleva ions) for the ap	ted to or ab opropriate B	ove the floor indicated by the uilding Diagram?
SECTION I -	PROPERTY OWNER	(OR OWNER'S	AUTHORIZE	D REPRESE	NTATIVE)	CERTIFICATION
indicate in Item G2.b and Check here if attachmed Property Owner or Owner Address:	ents are provided (includ	ative Name:				
			. =	State:	ZIP	Code:
Telephone:	Ext.:	Email:				
Signature:			Date:			
Comments:						

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11 BUILDING PHOTOGRAPHS

See Instructions for Item A6.

Building Street Address (including Apt., Unit, Suit	FOR INSURANCE COMPANY USE			
1040 SENECA RD City: VENICE	State: _	FL	ZIP Code: 34293	Policy Number:

Instructions: Insert below at least two and when possible four photographs showing each side of the building (for example, may only be able to take front and back pictures of townhouses/rowhouses). Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." Photographs must show the foundation. When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo One

Photo One Caption: FRONT VIEW (05-24-2024)

Clear Photo One



Photo Two

Photo Two Caption: REAR VIEW (05-24-2024)

Clear Photo Two

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11 BUILDING PHOTOGRAPHS

Continuation Page

Building Street Address (including Apt., Unit,	FOR INSURANCE COMPANY USE			
1040 SENECA RD City: VENICE	State:	FL	ZIP Code: 34293	Policy Number: Company NAIC Number:

Insert the third and fourth photographs below. Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.







Photo Three

Photo Three Caption: SIDE & BASE EQUIPMENTS VIEWS (05-24-2024)

Clear Photo Three





Photo Four

Photo Four Caption: FLOOD VENTS VIEWS (05-24-2024)

Clear Photo Four



ICC-ES Evaluation Report

ESR-4332

Reissued March 2024

This report also contains:

- CBC Supplement

Subject to renewal March 2026

- FBC Supplement

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.

Copyright © 2024 ICC Evaluation Service, LLC. All rights reserved.

DIVISION: 08 00 00— OPENINGS

Section: 08 95 43— Vents / Foundation Flood Vents REPORT HOLDER: SMART PRODUCT INNOVATIONS, INC. EVALUATION SUBJECT: FREEDOM FLOOD

VENT® AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608



1.0 EVALUATION SCOPE

Compliance with the following codes:

- ■2021, 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)

Properties evaluated:

- Physical operation
- Water flow
- Weathering

2.0 USES

The model FFV–1608 Freedom Flood Vent® is used to equalize hydrostatic pressure on walls of enclosures subject to rising or falling floodwaters. With the cover removed, the model FFV-1608 also provides natural air ventilation.

3.0 DESCRIPTION

3.1 General:

The model FFV-1608 Freedom Flood Vent® is an engineered mechanically operated in-wall flood vent (FV) that automatically allows floodwater to enter an enclosed area and exit. The FV is comprised of a polycarbonate frame with mounting flange and a polycarbonate horizontally pivoting door. When subjected to rising water, the model FFV-1608 Freedom Flood Vent® door is activated and pivots to allow water and debris to flow in either direction to equalize hydrostatic pressure from one side of the enclosure to the other. The FV features a removable polycarbonate cover. The FV door will activate and pivot when subjected to rising water with or without the polycarbonate cover installed.

3.2 Engineered Opening:

The FV complies with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/ SEI 24-14 (2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/ SEI 24, Freedom Flood Vent® FVs must be installed in accordance with Section 4.0 below. See Table 1 for vent size and maximum allowable area coverage for a single vent.

4.0 DESIGN AND INSTALLATION

The model FFV-1608 Freedom Flood Vent® is designed to be installed into walls or overhead doors of existing or new construction. Installation of the vent must be in accordance with the manufacturer's instructions, the applicable code, and this report. In order to comply with the engineered opening design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/ SEI 24-14 (2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Freedom

Flood Vent® must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 250 square feet (23.2 m2) of enclosed area.
- Below the base flood elevation.
- With the bottom of the vent located a maximum of 12 inches (305.4 mm) above the higher of the final interior grade or floor and the finished exterior grade immediately under each opening.

5.0 CONDITIONS OF USE:

The Freedom Flood Vent® described in this report complies with, or is a suitable alternative to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- **5.1** The model FFV-1608 Freedom Flood Vent® unit must be installed in accordance with this report, the applicable code and the manufacturer's published installation instructions. In the event of a conflict, the instructions in this report shall govern.
- 5.2 The model FFV-1608 Freedom Flood Vent® unit must not be used in place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.
- 5.3 Use of the Freedom Flood Vent as under-floor space ventilation is outside the scope of this report.
- **5.4** FFV–1608 Freedom Flood Vent® is manufactured in Gastonia, North Carolina under a quality control program with inspections by ICC-ES.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).

7.0 IDENTIFICATION

- 7.1 The Freedom Flood Vent® model described in this report must be identified by a label bearing the manufacturer's name (Smart Product Innovations, Inc.) and the evaluation report number (ESR-4332).
- 7.2 The report holder's contact information is the following:

SMART PRODUCT INNOVATIONS, INC.
19 MANTUA ROAD
MOUNT ROYAL, NEW JERSEY 08061
(800) 507-1527
www.freedomfloodvent.com
info@freedomfloodvent.com

TABLE 1—FREEDOM FLOOD VENT®

MODEL NAME	MODEL NUMBER	MODEL SIZE	COVERAGE (sq. ft.)
Freedom Flood Vent®	FFV-1608	15 ³ / ₄ " X 8 ¹ / ₁₆ "	250

For SI: 1 inch = 25.4 mm

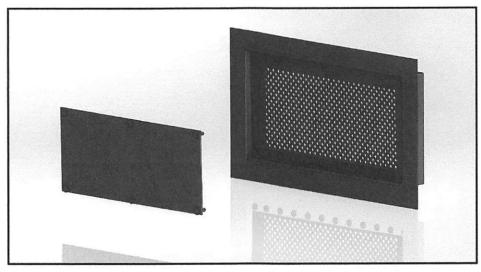


FIGURE 1-MODEL FFV-1608 FREEDOM FLOOD VENT®: SHOWN WITH COVER REMOVED

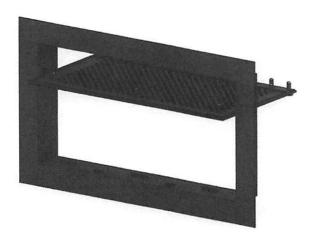


FIGURE 2—MODEL FFV-1608 FREEDOM FLOOD VENT®: SHOWN WITH FLOOD DOOR PIVOTED OPEN



ICC-ES Evaluation Report

ESR-4332 CBC and CRC Supplement

Reissued March 2024

This report is subject to renewal March 2026.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT® AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that the Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in ICC-ES evaluation report ESR-4332, has also been evaluated for compliance with codes noted below.

Applicable code editions:

■ 2019 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Planning and Development (OSHPD) AKA: California Department of Health Care Access and Information (HCAI) and the Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

■ 2019 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with CBC Chapter 12 provided the design and installation are in accordance with the 2018 International Building Code® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

- 2.1.1 OSHPD: The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.
- 2.1.2 DSA: The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

The Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with the 2019 CRC, provided the design and installation are in accordance with the 2018 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued March 2024.





ICC-ES Evaluation Report

ESR-4332 FBC Supplement

Reissued March 2024

This report is subject to renewal March 2026.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT® AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in ICC-ES evaluation report ESR-4332, has also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2020 Florida Building Code—Building
- 2020 Florida Building Code—Residential

2.0 CONCLUSIONS

The Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with the Florida Building Code—Building and the Florida Building Code—Residential, provided the design requirements are determined in accordance with the Florida Building Code—Building and the Florida Building Code—Residential, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-4332 for the 2018 International Building Code® (IBC) meet the requirements of Florida Building Code—Building and the Florida Building Code—Residential, as applicable.

Use of the Freedom Flood Vent® Automatic Foundation Flood Vent: Model FFV-1608 has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official, when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued March 2024.

