## **ELEVATION CERTIFICATE**

O.M.B. No 3067-0'. Expires May 31, 15

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

THE WALLE OF THE PARTY OF THE P		ROPERTY INF	ORMATION		FOR INSURANCE COMPANY US
BUILDING OWNER'S NAME					POLICY NUMBER
STREET ADDRESS (Including A	LESLIE & S	HELACH LI	aravis as C		. OLIO I NOMBEH
152	1 SHETBURNE LA	Number) OR P.O.	ROUTE AND BOX NUMBER		COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and	Block Numbers, etc.)	NE			
		TOT 22	ACTION NAME OF THE PARTY OF THE		
CITY		10/1 11/2	AQUALANE EST., SE		
		S	ARASOTA,	STATE FL	ZIP CODE
	SECTION B FI	LOOD INSURA	ANCE RATE MAP (FIRM)	INFORMATION	
Provide the following from the	he proper FIRM (See	Inotmetican	The state of the s	HOHMATION	
1 COMMUNITY NUMBER		mstructions):			
1 COMMONITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	8 PASE ELOGO EL TIMO
125144	0143	177	0 /5 /5 -		6. BASE FLOOD ELEVATION (in AO Zones, use depth)
. Indicate the elevation data 3. For Zones A or V, where		E	9/3/92	AE	11'
B. For Zones A or V, where the community's BFE:		101 011101	- See Section	B, Item 7) <sub>.</sub>	this building site, indicate
. Using the Elevation Certific describes the subject build (a) EIRM Zanas Alexandra (b) EIRM Zanas Alexandra (c) EIRM Zanas Alexandra (d) EIRM Zanas (d) EIRM Zan	SECTIO	NC BUILDIN	G ELEVATION INFORMA	TION	
<ul><li>(b). FIRM Zones V1-V30, VI the selected diagram, is</li></ul>	E, and V (with BFE).	The bottom of	the lowest horizontal struc	tural member o	d diagram is at an elevation  the reference level from the Bottom
(b). FIRM Zones V1-V30, VI the selected diagram, is c). FIRM Zone A (without B) below   (check one) the d). FIRM Zone AO. The floor one) the highest grade at level) elevated in accordant the elevation datured ander Comments on Page 2	E, and V (with BFE).  at an elevation of FE). The floor used a he highest grade adja or used as the referendjacent to the building ance with the community of the community	The bottom of the bottom of the street to the building level from the building of the street the bottom of the street the bottom of the street the bottom of	the lowest horizontal structed NGVD (or other FIRM e level from the selected olding.  The selected diagram is the selected of the selected diagram is	tural member of datum—see Sec liagram is leet about the building's lees Now property to the building's lees Now property the property that the building's lees Now property that the building lees Now property the building lees Now property that the building lees Now property that the building lees Now property that the building lees	f the reference level from tion B, Item 7). Light feet above or or or below (check lowest floor (reference or Unknown
(b). FIRM Zones V1-V30, Visite selected diagram, is c). FIRM Zone A (without 8) below (check one) it d). FIRM Zone AO. The floone) the highest grade at level) elevated in accordal indicate the elevation datument Comments on Page 2 the FIRM [see Section 8, 16] equation under Comments of the section by the	E, and V (with BFE).  at an elevation of L FE). The floor used a he highest grade adja or used as the referen djacent to the building ance with the commun n system used in dete 2). (NOTE: If the elect them 7], then convert to	The bottom of	the lowest horizontal structed NGVD (or other FIRM e level from the selected olding.  The selected diagram is been number is available, in management ordinance? The over reference level elevations of the datum system used to the datum system used.	tural member of datum—see Sec liagram is feet about the building's liagram Yes NGVD ations is different on the FIRM an	f the reference level from tion B, Item 7). Light feet above or or or below (check lowest floor (reference or Unknown
(b). FIRM Zones V1-V30, VI the selected diagram, is c). FIRM Zone A (without B) below (check one) the d). FIRM Zone AO. The floor one) the highest grade at level) elevated in accordant cate the elevation datuments on Page 2 the FIRM [see Section B, I sequation under Comments of Elevation reference mark us	E, and V (with BFE). at an elevation of L. FE). The floor used a he highest grade adjacent to the building ance with the community system used in detection Page 2.)	The bottom of the bottom of the state reference cent to the building level from the first floodplain remining the abovation datum up the elevations	the lowest horizontal structed NGVD (or other FIRM e level from the selected olding.  The selected diagram is been houmber is available, in management ordinance? To ove reference level elevation the datum system used to the datum system used to the firm the selected in the system used the selected in	tural member of datum—see Sec liagram is liagram is liagram is leet about the building's liagram is NGVD ations is different on the FIRM and	f the reference level from tion B, Item 7). Light feet above or or or below (check lowest floor (reference or Unknown
(b). FIRM Zones V1-V30, VI the selected diagram, is c). FIRM Zone A (without B) below (check one) the below (check one) the highest grade at level) elevated in accordance the elevation datument Comments on Page 2 the FIRM [see Section B, It is equation under Comments of Elevation reference mark us the reference level elevation NOTE: Use of construction NOTE:	E, and V (with BFE). at an elevation of  FE). The floor used a he highest grade adjacent used as the reference diacent to the building ance with the community system used in detection Page 2.)  The diagrams on FIRM:  The is based on: The action of the content of the co	The bottom of	the lowest horizontal structed NGVD (or other FIRM e level from the selected olding.  The selected diagram is bepth number is available, in management ordinance? ove reference level elevations of the datum system used in California on Page 10 (See Instructions on Page 11).	tural member of datum—see Sec liagram is liet about the building's liet with the building liet wi	f the reference level from the reference level from the reference level from the reference of the reference level from th
(b). FIRM Zones V1-V30, VI the selected diagram, is c). FIRM Zone A (without B) below (check one) the below (check one) the highest grade at level) elevated in accordance the elevation datument on Page 2 the FIRM (see Section B, It levation under Comments of Elevation reference level elevation.	E, and V (with BFE). at an elevation of LEFE). The floor used a he highest grade adjacent to the building ance with the community system used in detection Page 2.) (NOTE: If the election Page 2.) sed appears on FIRM: It is based on: KM action is based or the building ction is complete.)	The bottom of	the lowest horizontal struction B, item 7).  the lowest horizontal struction of the FIRM of the selected of the selected of the selected of the selected diagram is the selected in measuring the elevation of the datum system used the selected in the datum system used the construction of the selected in the datum system used the selected in the datum system used the selected in the datum system used the selected in the selected in the datum system used the selected in the sel	tural member of datum—see Sec liagram is liagram is liagram is liagram is leet aboostons: X NGVD ations: X NGVD ations is different on the FIRM and lage 4)  Ings  Berence level flocost-construction	the reference level from tion B, Item 7).  Lifeet above or or or or or below (check lowest floor (reference or Unknown '29 Other (describe on than that used on or
(b). FIRM Zones V1-V30, VI the selected diagram, is c). FIRM Zone A (without B) below (check one) the below (check one) the d). FIRM Zone AO. The floor one) the highest grade at level) elevated in accordant action datuments on Page 2 and action Comments on Page 2 and action under Comments of Elevation under Comments of Elevation reference mark us the reference level elevation NOTE: Use of construction asse this certificate will only be fill be required once construction.	E, and V (with BFE).  at an elevation of FE). The floor used a he highest grade adjace or used as the reference diacent to the building ance with the communication system used in detection (NOTE: If the elevation Page 2.)  sed appears on FIRM: It is based on: KN action of the building of the complete.)  The service of the building of the buil	The bottom of The bottom of The bottom of The bottom of The building the abovation datum up the elevations.  Yes Notation datum up the elevations of the building the construction of the building the building the construction of the building the b	the lowest horizontal structed NGVD (or other FIRM e level from the selected olding.  The selected diagram is been number is available, in management ordinance? To ove reference level elevates of in measuring the elevate of the datum system used in Construction on Paragraph of the construction. A point of construction. A point of the datum system is a does not yet have the reference of construction. A point of the datum system is a does not yet have the reference of construction.	tural member of datum—see Sec liagram is liagram is liagram is leet aboos the building's liagram is different on the FIRM and lage 4)  Ings  Berence level flood of the NGVD (or the leet NGVD)	the reference level from the reference level from B, Item 7).  Light feet above or or or or leve or below (check lowest floor (reference or Unknown 29 Other (describe of the or that used on the conversion or in place, in which Elevation Certificate


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to Interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

THOMAS E. ROBINSON	4075				
CERTIFIER'S NAME	LICENSE NUMBER (or Affix Seal)				
PROF. LAND STRVEYOR - OWNER & P	PRES. ROBINSON LAND SURVEYING, INC.				
TITLE	COMPANY NAME				
1225 SECOND ST.	SARASOTA, FI. 34236				
ADDRESS	CITY				
SIGNATURE	5/20/93 813-954-4473	ZIP			
	DATE PHONE				
COMMENTS:		1130			
	·				

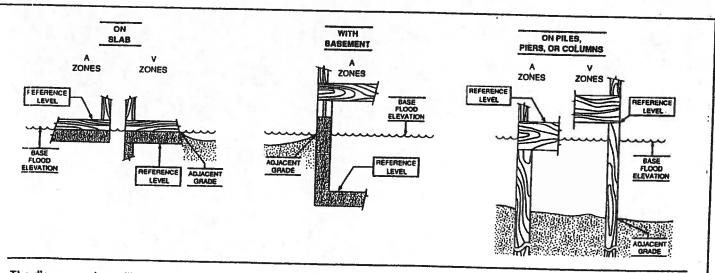

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.