ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding	FOR INSURANCE COMPANY USE						
Building Street Address (including Apt., Unit, Suite, and/	Policy Number:						
1714 Southpointe Drive							
	tate ZIP (orida 3423	Code	Company NAIC Number				
SECTION C BUILDING ELEVATION INFORMATION (SURVEY REQUIRED)							
C1. Building elevations are based on: Construction Drawings* Building Under Construction* Finished Construction *A new Elevation Certificate will be required when construction of the building is complete.							
C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/A, AR/AE, AR/A1–A30, AR/AH, AR/AO. Complete Items C2.a–h below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters.							
Benchmark Utilized: A 534, EL 15.37 Vertical Datum: NAVD 1988							
Indicate elevation datum used for the elevations in	items a) through h) below	w.					
☐ NGVD 1929 ☑ NAVD 1988 ☐ Othe	r/Source:						
Datum used for building elevations must be the sa	me as that used for the B	FE.	Check the measurement used.				
a) Top of bottom floor (including basement, crawled)	space, or enclosure floor)		12.5 feet meters				
b) Top of the next higher floor			25.9 🔀 feet 🔲 meters				
	hor A/ Zonos only)		N/A ☒ feet ☐ meters				
 c) Bottom of the lowest horizontal structural mem d) Attached garage (top of slab) 	Del (V Zolles Glily)		6.9 feet meters				
	andaina tha buildina						
e) Lowest elevation of machinery or equipment so (Describe type of equipment and location in Co	ervicing the building emments)		12.2 🔀 feet 🗌 meters				
f) Lowest adjacent (finished) grade next to building	ng (LAG)		6.2 feet meters				
g) Highest adjacent (finished) grade next to buildi	ing (HAG)		7.3 🔀 feet 🗌 meters				
 h) Lowest adjacent grade at lowest elevation of d structural support 	eck or stairs, including		6.4 🔀 feet 🗌 meters				
SECTION D - SURVEYO	R, ENGINEER, OR ARC	CHITECT CERTIF	CATION				
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.							
Were latitude and longitude in Section A provided by a			Check here if attachments.				
Certifier's Name	License Number		and the state of t				
James B. Burchett	LS5701		9 JELONE				
Title President			3648				
Company Name			No. 5701				
Sampey, Burchett and Knight, Inc.			No. 5701				
Address		• •	4-22-20 S				
1570 Global Court			A Aguar A				
City Sarasota	State Florida	ZIP Code 34240	SURVEYOR				
Signature James B Burchett Date: 2020.06.23 13:37:26-0100*	Date 06-22-2020	Telephone (941) 342-0349	Ext.				
Copy all pages of this Elevation Certificate and all attachi	ments for (1) community of	fficial, (2) insurance	agent/company, and (3) building owner.				
Comments (including type of equipment and location, per C2(e), if applicable) A9.(c) 4 Flood Flap Vents Model # FFWF08, providing 220 sq. ft. of coverage each for a total of 880 sq. ft. of coverage. C2(e) A/C units on both sides of residence. The structure lies entirely in Flood Zone AE 11. The lot lies in Flood Zone AE(EL11 & EL 12) and Flood Zone VE (el12). Flood Zone AE (EL12) and Flood Zone VE (EL 12) do not come in contact with the building.							

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding	FOR INSURANCE COMPANY USE						
Building Street Address (including Apt., Unit, Suite, and/o	or Bldg. No.) or P.O. R	toute and Box No.	Policy Number:				
City	ate Z	IP Code	Company NAIC Number				
•	orida 3	4231					
SECTION E - BUILDING ELE FOR ZONE	VATION INFORMAT AO AND ZONE A (V	TON (SURVEY NOT VITHOUT BFE)	REQUIRED)				
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters.							
E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG).							
 a) Top of bottom floor (including basement, crawlspace, or enclosure) is 		_	rs 🔲 above or 🔲 below the HAG.				
 b) Top of bottom floor (including basement, crawlspace, or enclosure) is 		_	rs 🔲 above or 🔲 below the LAG.				
E2. For Building Diagrams 6-9 with permanent flood op	eninas provided in Se	ction A Items 8 and/or	9 (see pages 1-2 of Instructions).				
the next higher floor (elevation C2.b in the diagrams) of the building is		_					
E3. Attached garage (top of slab) is		_	rs 🔲 above or 🔲 below the HAG.				
E4. Top of platform of machinery and/or equipment servicing the building is		_	rs above or below the HAG.				
E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in accordance with the community's floodplain management ordinance? Yes No Unknown. The local official must certify this information in Section G.							
SECTION F - PROPERTY OWN	ER (OR OWNER'S RI	EPRESENTATIVE) C	ERTIFICATION				
The property owner or owner's authorized representative community-issued BFE) or Zone AO must sign here. The	e wno completes Sections statements in Section	ons A, B, and E for Zons A, B, and E are con	rect to the best of my knowledge.				
Property Owner or Owner's Authorized Representative's							
Property Owner or Owner's Additionized Representative's	Ivaille						
Address	City	Si	ate ZIP Code				
Signature	Date	Te	elephone				
Comments		-					
1							
·							
·							

ELEVATION CERTIFICATE

OMB No. 1660-0008

Expiration Date: November 30, 2022 IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Policy Number: Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 1714 Southpointe Drive State ZIP Code Company NAIC Number City Florida 34231 Sarasota SECTION G - COMMUNITY INFORMATION (OPTIONAL) The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8-G10. In Puerto Rico only, enter meters. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor. engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.) A community official completed Section E for a building located in Zone A (without a FEMA-issued or community-issued BFE) or Zone AO. G3. The following information (Items G4–G10) is provided for community floodplain management purposes. G4. Permit Number G5. Date Permit Issued G6. Date Certificate of Compliance/Occupancy Issued G7. This permit has been issued for: ☐ New Construction ☐ Substantial Improvement G8. Elevation of as-built lowest floor (including basement) ☐ feet ☐ meters Datum of the building: ☐ feet ☐ meters G9. BFE or (in Zone AO) depth of flooding at the building site: Datum ☐ feet ☐ meters G10. Community's design flood elevation: Datum Local Official's Name Title **Community Name** Telephone Signature Date Comments (including type of equipment and location, per C2(e), if applicable) Check here if attachments.

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 1714 Southpointe Drive					
					State
Florida	34231				
	g Apt., Unit, Suite, and/or Bldg. No.) State	g Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. State ZIP Code			

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

Photo One Caption Front View 06/19/2020

Clear Photo One



Photo Two

Photo Two Caption Front and Right side View 06/19/2020

Clear Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, o	FOR INSURANCE COMPANY USE		
Building Street Address (including 1714 Southpointe Drive	g Apt., Unit, Suite, and/or Bldg. No.)	or P.O. Route and Box No.	Policy Number:
City	State	ZIP Code	Company NAIC Number
Sarasota	Florida	34231	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.

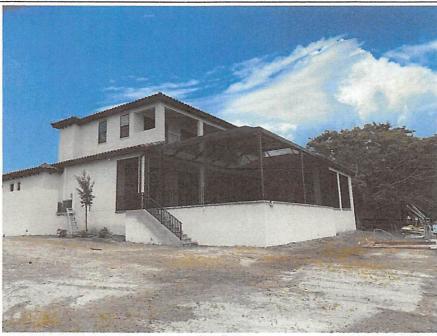


Photo Three

Photo Three Caption Rear View 06/19/2020

Clear Photo Three



Photo Four

Photo Four Caption Flood Vent

Clear Photo Four

U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A – PROPERTY INFORMATION						RANCE COMPANY USE	
A1. Building Owner's Name K R Byju					Policy Num	ber:	
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 1714 Southpointe Drive					Company N	IAIC Number:	
City Sarasota	City						
A3. Property Description (L Part of Lots 24 & 25, South	·			gal Description, et	c.)		
A4. Building Use (e.g., Res	sidential, Non-Residential,	Addition	, Accessory,	etc.) Residentia	al		
A5. Latitude/Longitude: L	at. 27°14'21" N	Long. 8	2°30'43" W	Horizonta	I Datum: ☐ NAD	1927 🗵 NAD 1983	
A6. Attach at least 2 photo	graphs of the building if th	e Certific	ate is being ι	ised to obtain floo	d insurance.		
A7. Building Diagram Num	per1B						
A8. For a building with a cr	awlspace or enclosure(s):						
a) Square footage of c	rawlspace or enclosure(s))		N/A sq ft			
b) Number of permane	nt flood openings in the cr	rawlspac	e or enclosure	e(s) within 1.0 foot	: above adjacent gr	ade <u>N/A</u>	
c) Total net area of floo	od openings in A8.b		N/A sq ir	I			
d) Engineered flood op	oenings? ☐ Yes ☒ [X	No					
A9. For a building with an a	ttached garage:						
a) Square footage of a	ttached garage		663.00 sq ft				
b) Number of permane	b) Number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade 4						
c) Total net area of floo	od openings in A9.b		880.00 sq	in			
d) Engineered flood op	enings? 🗵 Yes 🗍 N	Vo.					
a,ga.a.a spoigo. 应 100							
•	SECTION B - FLOOD	INSURA	1		ORMATION	1	
B1. NFIP Community Name Sarasota County 125144	& Community Number		B2. County Sarasota			B3. State Florida	
B4. Map/Panel B5. Su Number	ffix B6. FIRM Index Date	B7. FIRM Panel Effective/ Revised Date 11-04-2016		B8. Flood Zone(s)	B9. Base Flood E (Zone AO, us	Elevation(s) e Base Flood Depth)	
12115C0207 F	11-04-2016			AE	11		
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9: ☐ FIS Profile ☑ FIRM ☐ Community Determined ☐ Other/Source:							
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 NAVD 1988 Other/Source:							
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? ☐ Yes 区 No							
Designation Date: CBRS DPA							



ICC-ES Evaluation Report

ESR-3560

Reissued September 2019

This report is subject to renewal September 2020.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC

EVALUATION SUBJECT:

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012 and 2009 *International Building Code*® (IBC)
- 2018, 2015, 2012 and 2009 International Residential Code[®] (IRC)

Properties evaluated:

- Physical operation
- Water flow
- Weathering

2.0 USES

Flood Flaps® automatic flood vents are used to provide for the equalization of hydrostatic flood forces on exterior walls. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

Flood Flaps[®] automatic flood vents are engineered mechanically operated flood vents (FVs) that automatically allow flood waters to enter and exit enclosed areas. The FVs are constructed of ABS plastic which serves as the FV's housing, and a front grill that contains an anodized metal screen imbedded in polypropylene plastic. On contact with rising flood water, the grill will disengage from its secured position, allowing flood water and debris to flow through in either direction. The FVs are available in two series as described in Section 3.3.

The sealed series models contain two rubber flaps that close the FV to the passage of air when using with conditioned areas or sealed crawl spaces. In the same manner as the grill, the two rubber flaps are pushed open by water pressure, allowing water and debris to flow through the FV in either direction. See Figure 1 for an illustration of the Flood Flaps® automatic FV.

3.2 Engineered Opening:

The Flood Flaps® automatic FVs comply with the design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 (2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/SEI 24-05 (2012 and 2009 IBC and IRC)] for a rate of rise and fall of 5 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Flood Flaps® automatic FVs must be installed in accordance with Section 4.0.

3.3 Flood Vent Series Models:

Flood Flaps® automatic FVs are available in two series with multiple models and sizes as described in Table 1. The sealed series models, designated FFWF, include two rubber flaps for the prevention of air flow. The multipurpose series, designated FFNF, omits the rubber flaps.

3.4 Natural Ventilation:

Flood Flaps® automatic FV models FFNF12, FFNF08, FFNF05, and FFNF02 have metal screens with ¹/₄ inch by ¹/₄ inch (6 mm by 6 mm) openings and provide 37 square inches (0.02 m²) of net free opening to supply natural ventilation for under-floor ventilation. Flood Flaps® automatic FV models FFWF12, FFWF08, and FFWF05 have not been evaluated for use as openings for under-floor ventilation.

4.0 DESIGN AND INSTALLATION

Flood Flaps® automatic FVs are designed to be installed into walls of existing or new construction. Installation of the FVs must be in accordance with the manufacturer's instructions, the applicable code and this report. Flood Flaps® automatic FVs can be installed in wood, masonry and concrete walls up to a thickness of 12 inches (305 mm). In order to comply with the engineered opening design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 (2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/SEI 24-05 (2012 and 2009 IBC and IRC)], the Flood Flaps® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 220 square feet (20 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305 mm) above grade.

5.0 CONDITIONS OF USE

The Flood Flaps® automatic flood vents described in this report comply with, or are suitable alternatives to what is



specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- **5.1** The Flood Flaps® automatic FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- 5.2 The Flood Flaps[®] automatic FVs must not be used in place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).

7.0 IDENTIFICATION

7.1 The Flood Flaps[®] models recognized in this report are identified by a label bearing the manufacturer's name, the model number, and the evaluation report number (ESR-3560).

7.2 The report holder's contact information is the following:

FLOOD FLAPS®, LLC **POST OFFICE BOX 1003 ISLE OF PALMS, SOUTH CAROLINA 29451** (843) 881-0190 www.floodflaps.com info@floodflaps.com

TABLE 1—FLOOD FLAP AUTOMATIC FLOOD VENT MODEL SIZES

MODEL NUMBER	MODEL DESIGNATION	ROUGH OPENING (Width X Height) (inches)	VENT SIZE (W X H X D) (inches)	ENCLOSED AREA COVERAGE (ft²)	NET FREE AREA OPENING ¹ (in ²)
FFWF12	Sealed Series	16 x 8	15 ⁵ / ₈ X 7 ³ / ₄ X 12	220	NA
FFNF12	Multi-Purpose	16 x 8	15 ⁵ / ₈ X 7 ³ / ₄ X 12	220	37
FFWF08	Sealed Series	16 x 8	$15^{5}/_{8} \times 7^{3}/_{4} \times 8$	220	NA
FFNF08	Multi-Purpose	16 x 8	$15^{5}/_{8} \times 7^{3}/_{4} \times 8$	220	37
FFWF05	Sealed Series	16 x 8	$15^{5}/_{8} \times 7^{3}/_{4} \times 5$	220	NA
FFNF05	Multi-Purpose	16 x 8	$15^{5}/_{8} \times 7^{3}/_{4} \times 5$	220	37

For **SI**: 1 inch = 25.4 mm; 1 f^{t2} = 0.093 m^2

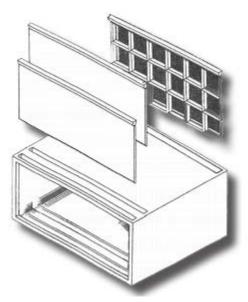


FIGURE 1—FLOOD FLAPS® AUTOMATIC FLOOD VENT

¹For under-floor ventilation only.



FIGURE 2—FLOOD FLAPS® AUTOMATIC FLOOD VENT SERIES MODELS



FIGURE 3—FLOOD FLAPS® AUTOMATIC FLOOD VENTS MULTIPLE DEPTH OFFERINGS



ICC-ES Evaluation Report

ESR-3560 FBC Supplement

Reissued September 2019 This report is subject to renewal September 2020.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC

EVALUATION SUBJECT:

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Flood Flaps® automatic flood vents, recognized in ICC-ES master evaluation report ESR-3560, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

2.0 CONCLUSIONS

The Flood Flaps flood vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-3560, comply with the *Florida Building Code—Building and* the *Florida Building Code—Residential*, provided the design and installation are in accordance with the 2015 *International Building Code®* provisions noted in the master report.

Use of the Flood Flaps flood vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the *Florida Building Code—Building* and the *Florida Building Code—Residential*.

For products falling under Florida Rule 9N-3, verification that the report holder's quality-assurance program is audited by a quality-assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official, when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the master report, reissued September 2019.

