JAN 2000 Received

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM JAN 2000
Received
Construction &
Property Stds

O M B No 3067-0077 Expires May 31, 1993

ATTENTION: Use of this certificate ooes not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

	Instructions for con	npleting this f	orm can be found on th	e following pag	ges.	
SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE	
BUILDING OWNER'S NAME WILLIAM A. & KATHLEEN M. KLEIBER					POLICY NUMBER	
STREET ADDRESS (Including Apt., Unit, Suite and/or Bidg, Number) OR P.O. ROUTE AND BOX NUMBER					COMPANY NAIC NUMBER	
OTHER DESCRIPTION (Lot and I	Biock Numbers, etc.)	illé Pa	"RK			
SARASOTA		• <i>1</i> /.		STATE	ZIP CCDE	
	SECTION B FL	OOD INSURA	NCE RATE MAP (FIRM)	INFORMATION		
Provide the following from to	ne proper FIRM (See	Instructions):				
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use pepth)	
125144	0154	E	SEPT. 3, 1992	A	(m. NO ZONES, USE DESITI)	
 Indicate the elevation dat For Zones A or V, where the community's BFE: 	no BFE is provided of	the FIRM, ar	nd the community has esta	ablished a BFE f	Other (describe on back) or this building site, indicate	
	SECTIO	NC BUILDI	NG ELEVATION INFORM	NOITAN		
1. Using the Elevation Certic describes the subject but 2(a). FIRM Zones A1-A30, of 55 feet (b). FIRM Zones V1-V30, the selected diagram. (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The	iding's reference lever AE, AH. and A (with E et NGVD (or other FIR VE. and V (with BFE) is at an elevation of _ BFE). The floor used the highest grade ad	BFE). The top M datum—see The bottom of th	of the reference level floo Section B, Item 7). , of the lowest horizontal str feet NGVD (or other FIF ince level from the selecte building.	r from the select ructural member RM datum-see S d diagram is	of the reference level from ection B, Item 7) Le feet above \(\sum \) or	
one) the highest grade	adjacent to the build	ing. If no flood	depth number is availab lain management ordinan	le, is the building	's lowest floor (reference	
 Indicate the elevation da under Comments on Partie FIRM [see Section equation under Comment 	ge 2). (NOTE: If the o B. Item 7]. then conve ats on Page 2.)	elevation datul ert the elevatio	m used in measuring the one of the first to the datum system u	elevations is differ sed on the FIRM	erent than that used on	
4. Elevation reference man	k used appears on FIF	RM: Yes ,	No (See Instructions of	n Page 4)		
5. The reference level elev (NOTE: Use of construct case this certificate will of will be required once con	ction drawings is only only be valid for the bu	valid if the buil ilding during th	ding does not yet have th	e reference leve		
6. The elevation of the low Section B, Item 7).	est grade immediately	adjacent to th	e building is: ZZ	.은 feet NGVD	(or other FIRM datum-see	
	-	ECTION D. C	OMMUNITY INFORMATI	ON 4		

1. If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C. Item 1


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6. 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	1/	LICENSE NUMBER (OF AMIX S		57m	
WILLIAM R.	KNIGHTIJE.	P5M # 4	5554		
15		COMPANY NAME			
OWNER		B&C SURVE	VINC		
ADDRESS		СПУ	11144	STATE	3:0
398/ SAY	AYER RO.	SARASOTA .	14	FL	3423
SIGNATURE		12/13/99	PHONE	941) 9-	1-429
Copies should be made	of this Carlificate (and)				12/
Copies should be made	of this Certificate for: 1) commu	unity official, 2) insurance agent/co	mpany, an	d 3) building	owner.
U	of this Certificate for: 1) commu		mpany, an	d 3) building	owner.
Copies should be made	of this Certificate for: 1) commu		mpany, an	d 3) building	owner.
U	of this Certificate for: 1) commu		mpany, an	d 3) building	owner.
U	of this Certificate for: 1) commu		mpany, an	d 3) building	owner.
U			mpany, an	d 3) building	owner.
U			mpany, an	d 3) building	owner.

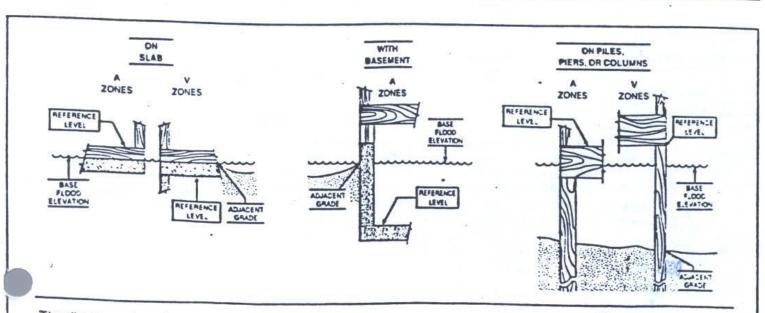

The diagrams above illustrate the points at which the elevations should be measured in A Zones and Zones. Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.