

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corre	sponding informa	tion from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, St 5058 WINDWARD AVENUE	iite, and/or Bldg. No	.) or P.O. Route and Box I	No. Policy Number:
City SARASOTA	Company NAIC Number		
SECTIO	N G - COMMUNIT	Y INFORMATION (OPTIO	NAL)
The local official who is authorized by law or on Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, en	dinance to administe Certificate. Comple	er the community's floodpla	ain management ordinance can complete
G1. The information in Section C was take engineer, or architect who is authorize data in the Comments area below.)	en from other documed by law to certify e	nentation that has been sig elevation information. (Indi	ned and sealed by a licensed surveyor, cate the source and date of the elevation
G2. A community official completed Section or Zone AO.	on E for a building lo	ocated in Zone A (without a	FEMA-issued or community-issued BFE)
G3. The following information (Items G4—	G10) is provided for	community floodplain mar	pagement purposes.
G4. Permit Number	G5. Date Permit Is	ssued	G6. Date Certificate of Compliance/Occupancy Issued
19 131191 B1			Compiler of the party of the pa
		Substantial Improvement	ent
G8. Elevation of as-built lowest floor (including of the building:	basement) —		feet meters Datum
G9. BFE or (in Zone AO) depth of flooding at t	he building site:		feet meters Datum
G10. Community's design flood elevation:	_		feet meters Datum
Local Official's Name		Title	
Community Name		Telephone	-
Signature		Date	
Comments (including type of equipment and loc	ation, per C2(e), if a	pplicable)	
			Check here if attachments.

U.S DEPARTMENT OF HOMELAND CURITY Federal Emergency Management Agency National Flood Insurance Program



OMB No. 1660-0008

Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

. "					FOR INSUF	RANCE COMPANY USE	
A1. Building Owner's Name JOSEPH & CHERYL ABRAHAM Policy Number:						ber:	
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Company NAIC Number:						AIC Number:	
	5058 WINDWARD AVENUE						
City SARASOTA				State Florida		ZIP Code 34242	
A3. Property Desc LOT 17, SARA SAI		nd Block Numbers, Ta PID#0081120037	x Parce	l Number, Le	gal Description, et	c.)	
A4. Building Use (e.g., Resider	ntial, Non-Residential,	Addition	, Accessory,	etc.) RESIDEN	TIAL	
A5. Latitude/Longit	tude: Lat. 2	7d16'43.96"N	Long. 8	2d33'38.59"V	V Horizonta	l Datum: 🔲 NAD 1	927 🔀 NAD 1983
A6. Attach at least	2 photograp	hs of the building if the	e Certific	ate is being ι	used to obtain floo	d insurance.	
A7. Building Diagra	am Number	1B					
A8. For a building	with a crawls	space or enclosure(s):					
a) Square fool	tage of crawl	space or enclosure(s)			0.00 sq ft		
b) Number of p	ermanent flo	ood openings in the cr	awispac	e or enclosure	e(s) within 1.0 fool	above adjacent gra	nde 0
c) Total net are	ea of flood o	penings in A8.b		0.00 sq in	ı		
d) Engineered	flood openir	ngs? 🗌 Yes 🗵 N	No.				
A9. For a building w	vith an attach	ned garage:					
_		ned garage		763.00 sa ft			
		ood openings in the att				acent grade 4	
		penings in A9.b		sq	ın		
d) Engineered	flood openin	gs? 🛛 Yes 🗌 N	lo				
	+	CTION B - FLOOD I	NSURA	NCE RATE	MAP (FIRM) INF	ORMATION	
	B1. NFIP Community Name & Community Number SARASOTA COUNTY, FLORIDA 125144 B2. County Name B3. State Florida						
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date	Effe	I Panel ective/	B8. Flood Zone(s)	B9. Base Flood E (Zone AO, use	levation(s) e Base Flood Depth)
12115C0143	F	11-04-2016	11-04-2		AE	9	
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:							
FIS Profile FIRM Community Determined Other/Source:							
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 NAVD 1988 Other/Source:							
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? Tyes X No							
Designation Date: CBRS OPA							
	<u> </u>						

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresp	FOR INSURANCE COMPANY USE					
Building Street Address (including Apt., Unit, Suite 5058 WINDWARD AVENUE	Policy Number:					
City State ZIP Code SARASOTA Florida 34242			Company NAIC Number			
SECTION C - BUILD	NG ELEVATION INFORMAT	ION (SURVEY RE	QUIRE	D)		
C1. Building elevations are based on: Construction Drawings* Building Under Construction* Finished Construction *A new Elevation Certificate will be required when construction of the building is complete. C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/A, AR/AE, AR/A1–A30, AR/AH, AR/AO. Complete Items C2.a–h below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters. Benchmark Utilized: COUNTY BENCHMARK #81A Vertical Datum: NGVD 1929						
Indicate elevation datum used for the elevati	ons in items a) through h) below	N.				
☐ NGVD 1929 ☐ NAVD 1988 ☐						
Datum used for building elevations must be t		FE.				
					asurement used.	
 a) Top of bottom floor (including basement, 	crawispace, or enclosure floor)		10.6	feet	meters	
b) Top of the next higher floor			N/A		meters meters	
c) Bottom of the lowest horizontal structural	member (V Zones only)		N/A		meters	
d) Attached garage (top of slab)			5.5	✓ feet	meters	
e) Lowest elevation of machinery or equipm (Describe type of equipment and location	ent servicing the building in Comments)		10.3		meters	
f) Lowest adjacent (finished) grade next to	building (LAG)		4.5		meters	
g) Highest adjacent (finished) grade next to	- , ,		5.3		meters	
h) Lowest adjacent grade at lowest elevation structural support			4.5	⊠ feet	meters	
SECTION D - SURV	EYOR, ENGINEER, OR ARC	HITECT CERTIEN	CATIO			
This certification is to be signed and sealed by a land certify that the information on this Certificate repstatement may be punishable by fine or imprison. Were latitude and longitude in Section A provided	and surveyor, engineer, or arch resents my best efforts to interp nent under 18 U.S. Code, Secti	nitect authorized by oret the data availal ion 1001.	law to c	ertify eleva derstand ti	ation information. hat any false	
			٠ ـــا	STICOR TICIC	in attachments.	
Certifier's Name JAMES B. AMBERGER	License Number LS6333		K	8/1	3/2020	
Title PRESIDENT						
Company Name JIM AMBERGER LAND SURVEYING LLC	Place Seal Seal					
Address 1055 S. TAMIAMI TRAIL, SUITE 110-B		H	ere			
City SARASOTA	State Florida	ZIP Code 34236		7	910/88	
Signature	8/13/2020	Telephone (941) 955-6333	Ext.			
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.						
Comments (including type of equipment and location, per C2(e), if applicable) C2: ELEVATIONS CONVERTED USING CORPSCON6 SOFTWARE. C2e: AIR CONDITIONING COMPRESSOR LOCATED ON NORTH SIDE OF RESIDENCE C2a/c2f: THE DIFFERENCE BETWEEN THESE TWO ELEVATIONS IS DUE TO THIS BEING BACKFILLED STEMWALL CONSTRUCTION. A9(a/d): SMART VENT MODEL 1540-520. THESE VENTS ARE RATED TO PROVIDE SUFFICIENT HYDROSTATIC PRESSURE FOR 200 SQUARE FEET EACH.						

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMP	ORTANT: In these spaces, copy the corres	sponding information	n from Section A.		FOR INSURANCE COMPANY USE		
	lding Street Address (including Apt., Unit, Suit 58 WINDWARD AVENUE	te, and/or Bldg. No.)	or P.O. Route and Box	No.	Policy Number:		
_		State	ZIP Code		Company NAIC Number		
ŞA	RASOTA	Florida	34242				
	SECTION E - BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE)						
con	Zones AO and A (without BFE), complete Iten plete Sections A, B, and C. For Items E1–E4, er meters.	ms E1–E5. If the Cer use natural grade, if	tificate is intended to su available. Check the π	upport a neasuren	LOMA or LOMR-F request, nent used. In Puerto Rico only,		
	Provide elevation information for the followin the highest adjacent grade (HAG) and the lo a) Top of bottom floor (including basement, crawlspace, or enclosure) is	g and check the appo west adjacent grade	(LAG).	_	_		
	b) Top of bottom floor (including basement, crawlspace, or enclosure) is			_] meters			
E2.	For Building Diagrams 6–9 with permanent fi	lood openings provid		_			
	the next higher floor (elevation C2.b in the diagrams) of the building is	-	feet [meters	above or below the HAG.		
	Attached garage (top of slab) is		feet [meters	above or below the HAG.		
E4.	Top of platform of machinery and/or equipme servicing the building is	ent <u>-</u>	feet [] meters	above or below the HAG.		
E5.	Zone AO only: If no flood depth number is av floodplain management ordinance? Yes	vailable, is the top of s	the bottom floor elevate nown. The local officia	ed in acc al must c	ordance with the community's ertify this information in Section G.		
***************************************	SECTION F - PROPERTY	OWNER (OR OWN	ER'S REPRESENTAT	IVE) CEI	RTIFICATION		
con	property owner or owner's authorized representation property owner or Zone AO must sign here.	ere. The statements i	es Sections A, B, and I n Sections A, B, and E	E for Zor	ne A (without a FEMA-issued or ect to the best of my knowledge.		
Pro	perty Owner or Owner's Authorized Represen	tative's Name					
	ress		City	Sta	te ZIP Code		
Sigi	nature		Date	Tele	ephone		
Con	nments						
	B						
					☐ Check here if attachments.		



BUILDING PHOTOGRAPHS

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, cop	FOR INSURANCE COMPANY USE		
Building Street Address (including A 5058 WINDWARD AVENUE	Policy Number:		
City	State	ZIP Code	Company NAIC Number
SARASOTA	Florida	34242	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

Photo One Caption FRONT VIEW

ELEVATION CERTIFICATE

Clear Photo One



Photo Two

Photo Two Caption REAR VIEW

Clear Photo Two



SARASOTA

BUILDING PHOTOGRAPHS

OMB No. 1660-0008 Expiration Date: November 30, 2022

Continuation Page IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. **Policy Number:** 5058 WINDWARD AVENUE City State ZIP Code Company NAIC Number

34242

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with; date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.

Florida



Photo Three

Photo Three Caption TYPICAL FLOW-THRU VENT

Clear Photo Three

Photo Four

Photo Four

Photo Four Caption

Clear Photo Four



Most Widely Accepted and Trusted

ICC-ES Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2015 This report is subject to renewal 02/2017.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMARTVENT PRODUCTS, INC.

430 ANDBRO DRIVE, UNIT 1 **PITMAN, NEW JERSEY 08071**

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514




Look for the trusted marks of Conformity!

"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"













ICC-ES Evaluation Report

ESR-2074*

Reissued February 2015

This report is subject to renewal February 2017.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2012, 2009 and 2006 International Building Code® (IBC)
- 2012, 2009 and 2006 International Residential Code® (IRC)
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

¹The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent[®] units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow.

The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT®Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.6.2.2 of ASCE/SEI 24 for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

4.0 DESIGN AND INSTALLATION

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. The mounting straps allow mounting in masonry and concrete walls up to 12 inches (305 mm) thick. In order to comply with the engineered opening design principle noted in Section 2.6.2.2 of ASCE/SEI 24, the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final

*Revised July 2015



grade or floor and finished exterior grade immediately under each opening.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but

are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated October 2013 (editorially revised May 2014).

7.0 IDENTIFICATION

The Smart VENT® models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

TABLE 1—MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m²

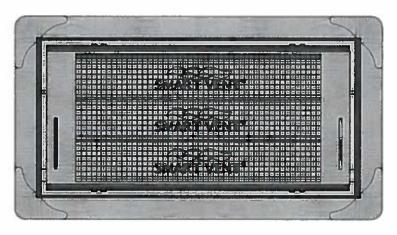


FIGURE 1—SMART VENT: MODEL 1540-510

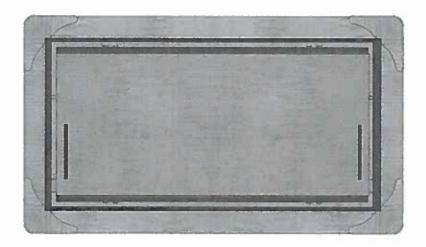


FIGURE 2—SMART VENT MODEL 1540-520

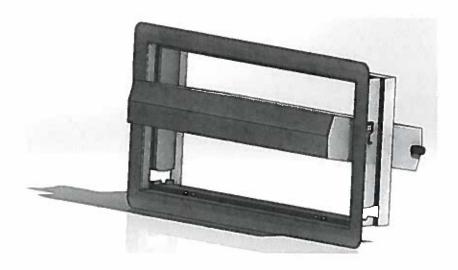


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN



ICC-ES Evaluation Report

ESR-2074 FBC Supplement*

Reissued February 2015

This report is subject to renewal February 2017.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2014 Florida Building Code—Building (FBC)
- 2014 Florida Building Code—Residential (FRC)

2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the FBC and the FRC, provided the design and installation are in accordance with the *International Building Code®* provisions noted in the master report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the FBC and the FRC.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the master report, reissued February 2015 and revised July 2015.

*Revised July 2015

