U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

ELEVATION CERTIFICATE Important: Follow the instructions on pages 1–9,

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFO	The state of the s	FOR INSURANCE COMPANY USE
A1. Building Owner's Name JANICE AND MICHAEL WEBSTER		Policy Number:
A2. Building Street Address (including Apt., Unit, Suite, and/Box No.582 COMMONWEALTH LANE	or Bldg. No.) or P.O. Route and	Company NAIC Number:
City SARASOTA	State Florida	ZIP Code 34242
A3. Property Description (Lot and Block Numbers, Tax Parce LOT 41, SIESTA'S BAYSIDE SUBDIVISION	el Number, Legal Description, etc.)	
A4. Building Use (e.g., Residential, Non-Residential, Addition	n, Accessory, etc.) RESIDENTI	AL
A5. Latitude/Longitude: Lat 27°16′56.7 N Long.	32°33'20.6" W Horizontal D	Datum: ☐ NAD 1927 🗵 NAD 1983
A6. Attach at least 2 photographs of the building if the Certifi	cate is being used to obtain flood i	nsurance.
A7. Building Diagram Number 1B		
A8. For a building with a crawlspace or enclosure(s):		
a) Square footage of crawlspace or enclosure(s)	0.00 sq ft	
b) Number of permanent flood openings in the crawlspace	ce or enclosure(s) within 1.0 foot at	bove adjacent grade 0
c) Total net area of flood openings in A8.b	0.00 sq in	
d) Engineered flood openings? Yes X No		
A9. For a building with an attached garage:		
a) Square footage of attached garage	688.00 sq ft	
b) Number of permanent flood openings in the attached	garage within 1.0 foot above adjac	ent grade 4
c) Total net area of flood openings in A9.b	204.00 sq in	
d) Engineered flood openings? X Yes No		
T, Tiginorea need opaninger [2] 100		
SECTION B - FLOOD INSURA	ANCE RATE MAP (FIRM) INFO	RMATION
B1. NFIP Community Name & Community Number 125144 SARASOTA	B2. County Name SARASOTA	B3. State
123144 GARAGUTA	SARASUTA	Florida
Number Date Ef	RM Panel B8. Flood Entire/ Zone(s)	39. Base Flood Elevation(s) (Zone AO, use Base Flood Depth)
12081C0141 F 11-04-2016 11-04-	2016 AE	9'
B10. Indicate the source of the Base Flood Elevation (BFE) of	lata or base flood depth entered in	Item B9:
☐ FIS Profile ☒ FIRM ☐ Community Determined	Other/Source:	
B11. Indicate elevation datum used for BFE in Item B9:	NGVD 1929 🔀 NAVD 1988 🔲	Other/Source:
B12. Is the building located in a Coastal Barrier Resources S	ystem (CBRS) area or Otherwise I	Protected Area (OPA)? TVAS VINA
Designation Date:	tan (garage)	TO THE INDICATE OF THE PARTY INC.
and the state of t		_ = 00

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box N 582 COMMONWEALTH LANE City State ZIP Code SARASOTA Florida 34242 SECTION C - BUILDING ELEVATION INFORMATION (SURV		cy Number:	
SARASOTA Florida 34242	Con		
SECTION C - BUILDING ELEVATION INFORMATION (SURV		ipany NAIC	Number
	EY REQUI	RED)	
C1. Building elevations are based on: Construction Drawings* Building Under Construction of the building is completed when construction of the building is completed.	e.	_	shed Construction
C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/. Complete Items C2.s–h below according to the building diagram specified in Item A7. In Benchmark Utilized: SARASOTA COUNTY. BM Vertical Datum: NAVD 88 D.	Puerto Rice	R/A1-A30, only, enter	AR/AH, AR/AO. meters.
Indicate elevation datum used for the elevations in items a) through h) below. NGVD 1929 X NAVD 1988 Other/Source:			
Datum used for building elevations must be the same as that used for the BFE.		heck the me	easurement used.
a) Top of bottom floor (including basement, crawlspace, or enclosure floor)	10.10	x feet	meters
b) Top of the next higher floor	N/A	⊠ feet	meters
c) Bottom of the lowest horizontal structural member (V Zones only)	N/A	X feet	meters
d) Attached garage (top of slab)	6.59	X feet	meters
e) Lowest elevation of machinery or equipment servicing the building (Describe type of equipment and location in Comments)	10.20	⊠ feet	meters
f) Lowest adjacent (finished) grade next to building (LAG)	5.90	X feet	meters
g) Highest adjacent (finished) grade next to building (HAG)	6.51	X feet	meters
h) Lowest adjacent grade at lowest elevation of deck or stairs, including structural support	N/A	X feet	meters
SECTION D - SURVEYOR, ENGINEER, OR ARCHITECT CE	RTIFICATI	ON	
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorist certify that the information on this Certificate represents my best efforts to interpret the data statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001. Were latitude and longitude in Section A provided by a licensed land surveyor?	available. I	understand	vation Information. that any false re if attachments.
Certifier's Name License Number		0/	7 .0
GERALD D. STROOP JR 4679		8/26	12019
Title PLS		T,	12019
Company Name CROSS SURVEYING		17	
Address 5265 OFFICE PARK BLVD SUITE 101			lery.
City State ZIP Code BRADENTON Florida 34203	×	Gare	1 Dolune
Signature Date Telephone (941) 748-8	340 Ex		/
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insur	rance agent/	company, ar	nd (3) building owner
Comments (including type of equipment and location, per C2(e), if applicable) AC is on the left side 4 FLOW TRUS VENTS 250 SQ. IN X = 1000 SQ IN (FREEDOM FLOOD VENTS FFV-1608-	250 SQ FT)	ESR-4332	

ELEVATION GERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

Building Street Address (including Apt., Unit, Suite, and 582 COMMONWEALTH LANE		from Section A.		FOR INSURANCE COMPANY USE
THE CHIMICITE IN THE SECOND STREET	d/or Bldg. No.) or	P.O. Route and Box	No.	Policy Number:
	State Florida	ZIP Code 34242		Company NAIC Number
SECTION E – BUILDING EL FOR ZON	EVATION INFO	RMATION (SURVE E A (WITHOUT BFI	Y NOT	REQUIRED)
For Zones AO and A (without BFE), complete Items E1 complete Sections A, B, and C. For Items E1–E4, use renter meters.	-E5. If the Certif natural grade, if a	icate is intended to su vailable. Check the m	upport a leasurer	LOMA or LOMR-F request, nent used. In Puerto Rico only,
E1. Provide elevation information for the following and the highest adjacent grade (HAG) and the lowest	check the appro adjacent grade (L	priate boxes to show AG).	whether	the elevation is above or below
 a) Top of bottom floor (including basement, crawispace, or enclosure) is 		[] feet [meters	above or below the HAG.
 Top of bottom floor (including basement, crawispace, or enclosure) is 	7.16	feet] meters	above or below the LAG.
E2. For Building Diagrams 6-9 with permanent flood of	penings provided	in Section A Items 8	and/or	9 (see pages 1-2 of Instructions).
the next higher floor (elevation C2.b in the diagrams) of the building is		[] feet [meters	above or below the HAG.
E3. Attached garage (top of slab) is	* <u>101 × 1</u>	feet [meter	above or below the HAG.
E4. Top of platform of machinery and/or equipment servicing the building is		feet [] meters	above or below the HAG.
E5. Zone AO only: If no flood depth number is availab floodplain management ordinance? Yes				
Property Owner or Owner's Authorized Representative Address		City	Sta	ite ZIP Code
Signature		Date	Tel	ephone
Signature		Date	Tel	ephone
		Date	Tel	ephone
		Date	Tel	ephone
		Date	Tel	ephone
		Date	Tel	ephone
		Date	Tel	ephone
		Date	Tel	ephone
		Date	Tel	ephone
		Date	Tel	ephone
		Date	Tel	ephone
		Date	Tel	ephone
		Date	Tel	ephone
		Date	Tel	ephone
		Date	Tel	ephone Check here if attachments.

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: in these spaces, copy the			FOR INSURANCE COMPANY USE
Building Street Address (Including Apt., U 582 COMMONWEALTH LANE	nit, Suite, and/or Bidg. No.) or f	2.O. Route and Box No.	Policy Number:
City SARASOTA	State Florida	ZIP Code 34242	Company NAIC Number
SE	CTION G - COMMUNITY INF	ORMATION (OPTIONAL)	
The local official who is authorized by law Sections A, B, C (or E), and G of this Elevused in Items G8-G10. In Puerto Rico on G1. The information in Section C was	vation Certificate. Complete the ly, enter meters.	applicable item(s) and sig	anagement ordinance can complete gn below. Check the measurement and sealed by a licensed surveyor,
engineer, or architect who is au data in the Comments area belo	thorized by law to certify elevatiow.)	ion information. (Indicate t	the source and date of the elevation
or Zone AO.			/A-issued or community-issued BFE)
G3. The following information (Items	s G4-G10) is provided for comm	runity floodplain managen	nent purposes.
G4. Permit Number	G5. Date Permit Issued		Date Certificate of Compliance/Occupancy Issued
G7. This permit has been issued for:	☐ New Construction ☐ Su	ubstantial Improvement	
G8. Elevation of as-built lowest floor (incl of the building:	luding basement)	[fee	et 🗌 meters Datum
G9. BFE or (in Zone AO) depth of flooding	ng at the building site:	[] fee	t meters Datum
G10. Community's design flood elevation:		fee	et meters
Local Official's Name	Т	itle	7
Community Name	T	elephone	
Signature	D	ate	- 10
Comments (including type of equipment a	nd location, per C2(e), if applica	ble)	
			☐ Check here if attachments.
PRINCE THE GOING OF THE RESIDENCE			

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A.

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.

582 COMMONWEALTH LANE

City State ZIP Code Company NAIC Number:

SARASOTA Florida 34242

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.

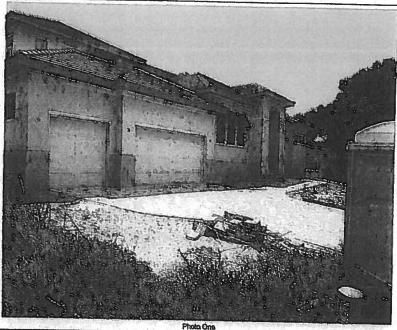


Photo One Caption FRONT LEFT 08-07-18

Clear Photo One

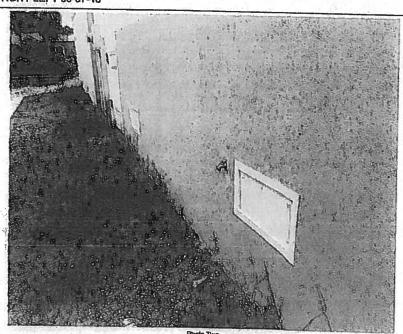


Photo Two Caption LEFT SIDE 08-26-2019 AC IS THE THE COVE ABOVE

Clear Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT. In Above			Expiration Date: November 30, 2010
IMPORTANT: In these spaces, copy the corresponding information from Section A. Building Street Address (including Apt., Unit, Suite, and/or Bidg. No.) or P.O. Route and Box No. 582 COMMONWEALTH LANE			FOR INSURANCE COMPANY USE Policy Number:
GEN (100) / (1	Florida	34242	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken, "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.

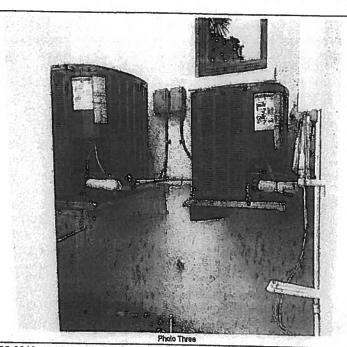


Photo Three Caption AC 08-26-2019

Clear Photo Three


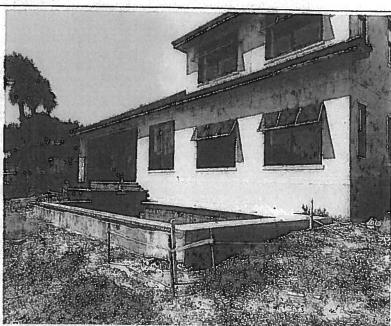


Photo Four Caption REAR OF HOUSE 08-26-2019

Clear Photo Four

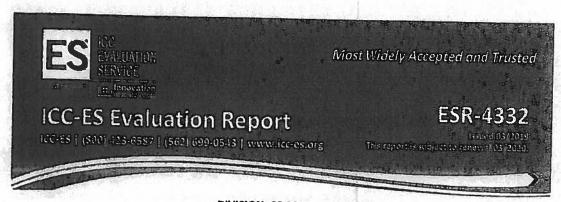

DIVISION: 08 00 00-OPENINGS SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT™ AUTOMATIC FOUNDATION FLOOD VENT: **MODEL FFV-1608**



"2014 Reciplent of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report



Copyright © 2019 ICC Evaluation Service, LLC. All rights reserved.



Mast Widely Accepted and Trusted

ICC-ES Evaluation Report

ESR-4332

Issued March 2019

This report is subject to renewal March 2020.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 90 00—OPENINGS Section: 08 95 43—Vents / Foundation Flood Vents

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT™ AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code[®] (IBC)
- 2018, 2015, 2012, 2009 and 2006 international Residential Code (IRC)

Properties evaluated:

- Physical operation
- Water flow
- Weathering

2.0 USES

The model FFV-1608 Freedom Flood Vent is used to equalize hydrostatic pressure on walls of enclosures subject to rising or falling floodwaters. With the cover removed, the model FFV-1608 also provides natural air ventilation.

3.0 DESCRIPTION

3.1 General:

The model FFV-1608 Freedom Flood Vent is an engineered mechanically operated in-wall flood vent (FV) that automatically allows floodwater to enter an enclosed area and exit. The FV is comprised of a polycarbonate frame with mounting flange and a polycarbonate horizontally pivoting door. When subjected to rising water, the model FFV-1608 Freedom Flood Vent door is activated and pivots to allow water and debris to flow in either direction to equalize hydrostatic pressure from one side of the enclosure to the other. The FV features a removable polycarbonate cover. The FV door will activate and pivot when subjected to rising water with or without the polycarbonate cover installed.

3.2 Engineered Opening:

The FV complies with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/ SEI 24-14 (2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/ SEI 24, Freedom Flood Vent* FVs must be installed in accordance with Section 4.0 below. See Table 1 for vent size and maximum allowable area coverage for a single vent.

4.0 DESIGN AND INSTALLATION

The model FFV-1608 Freedom Flood Vent is designed to be installed into wells or overhead doors of existing or new construction. Installation of the vent must be in accordance with the manufacturer's instructions, the applicable code, and this report, in order to comply with the engineered opening design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/ SEI 24-14 (2018 and 2015 IBC and IRC) (Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)), the Freedom Flood Vent imust be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 250 square feet (23.2 m²) of enclosed area.
- Below the base food elevation.
- With the bottom of the vent located a maximum of 12 inches (305.4 mm) above the higher of the final interior grade or floor and the finished exterior grade immediately under each opening.

5.0 CONDITIONS OF USE

The Freedom Flood Vent³⁶ described in this report compiles with, or is a suitable alternative to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The model FFV-1608 Freedom Flood Vent⁵⁰ unit must be installed in accordance with this report, the applicable code and the manufacturer's published installation instructions. In the event of a conflict, the instructions in this report shall govern.
- 5.2 The model FFV-1608 Freedom Flood Vent[®] unit must not be used in place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other auxiliates not specifically addressed, nor are they to be construed as an endocrement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LEC, express or implied, as to any finding or other natter in this report, or as to any product covered by the report.



5.3 Use of the Freedom Flood Vent as under-floor space ventilation is outside the scope of this report.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Machanically Operated Flood Venis (AC364), dated August 2015 (editorially revised October 2017).

7.0 IDENTIFICATION

7.1 The Freedom Flood Vent[®] model recognized in this report must be identified by a tabel bearing the manufacturer's name (Smart Product Innovations, Inc.) and the evaluation report number (ESR-4332.).

7.2 The report holder's contact information is the following:

SMART PRODUCT INNOVATIONS, INC.
430 ANDERO DRIVE, UNIT 1
PITMAN, NEW JERSEY 08071
(800) 507-1527

www.freedomfloodvent.com
Info@freedomfloodvent.com

TABLE 1-FREEDOM FLOOD VENTEN

MODEL NAME	MODEL NUMBER	MODEL SIZE	COVERAGE (sq. ft.)
Freedom Flood Vent ^{TIJ}	FFV-1608	153/, X81/H	250

For St. 1 inch = 25.4 mm

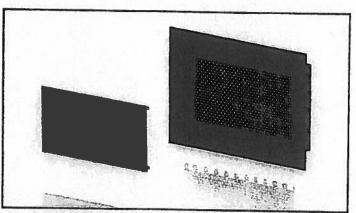


FIGURE 1-MODEL FFV-1608 FREEDOM FLOOD VENTTM: SHOWN WITH COVER REMOVED

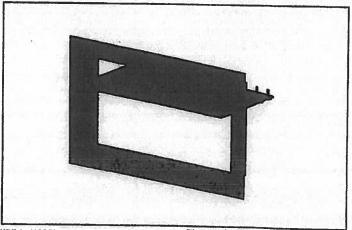


FIGURE 2—MODEL FFV-1608 FREEDOM FLOOD VENTTM: SHOWN WITH FLOOD DOOR PIVOTED OPEN



Most Widely Accepted and Trusted

ICC-ES Evaluation Report

ESR-4332 CBC and CRC Supplement

Issued March 2019

This report is subject to renewal March 2020.

www.icc-as.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS Section: 08 95 43-Vents / Foundation Flood Vents

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT™ AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that the Freedom Flood Vent. Model FFV-1608, recognized in ICC-ES master evaluation report ESR-4332, has also been evaluated for compliance with codes noted below.

Applicable code edition(s):

- = 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 GBC:

The Freedom Flood Vent. Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the master evaluation report ESR-4332, complies with CBC Chapters 12, 16 and 16A, provided the design and installation are in accordance with the 2015 international Building Code (2015 IBC) provisions noted in the master report and the additional requirements of 12, 16, and 16A, as applicable.

The product recognized in this supplement has not been evaluated under CBC Chapter 7A for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

2.2 CRC:

The Freedom Flood Vent[™] Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the master evaluation report ESR-4332, complies with the 2016 CRC, provided the design and installation are in accordance with the 2015 *International Residential Code*[®] (2015 IRC) provisions noted in the master report.

The product recognized in this supplement has not been evaluated under 2016 CRC Chapter R337, for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildiand-Urban Interface Fire Area.

The product recognized in this supplement has not been evaluated for compliance with the International Wildland-Urban Interface Code*.

This supplement expires concurrently with the master report, issued March 2019.