U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION	FOR INSURANCE COMPANY USE	
A1. Building Owner's Name	Policy Number:	
Peter J. McDermott Family Trust		
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.	Company NAIC Number:	
359 Palmetto Road West		
	ZIP Code	
Nokomis Florida A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Legal Description, etc.)	34275	
Lot 17, Block 43 Corrected Plat of Bay Point, PID #0172030008		
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.) Residential		
A5. Latitude/Longitude: Lat. 27°07'23.4" Long. 82°27'33.8" Horizontal Datum	:: NAD 1927 X NAD 1983	
A6. Attach at least 2 photographs of the building if the Certificate is being used to obtain flood insura	ance.	
A7. Building Diagram Number 1B		
A8. For a building with a crawispace or enclosure(s):		
a) Square footage of crawispace or enclosure(s) N/A sq ft		
b) Number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot above	adjacent grade N/A	
c) Total net area of flood openings in A8.b N/A sq in		
d) Engineered flood openings?		
	2	
A9. For a building with an attached garage:		
a) Square footage of attached garage 663.00 sq ft		
b) Number of permanent flood openings in the attached garage within 1.0 foot above adjacent g	rade 6	
c) Total net area of flood openings in A9.b 1320.00 sq in	1	
d) Engineered flood openings? Yes No	2.	
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFORMA	TION	
B1. NFIP Community Name & Community Number B2. County Name	B3. State	
Sarasota County 125144 Sarasota	Florida	
Number Date Effective/ Zone(s) (2	ase Flood Elevation(s) Cone AO, use Base Flood Depth)	
12115C0327 F 11-04-2016 Revised Date 11-04-2016 AE 10	•	
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item	B9:	
☐ FIS Profile ☒ FIRM ☐ Community Determined ☐ Other/Source:		
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 X NAVD 1988 Ott	ner/Source:	
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Prote	cted Area (OPA)? 🔲 Yes 🗵 No	
Designation Date: CBRS CPA	_	

OMB No. 1660-0008 **ELEVATION CERTIFICATE** Expiration Date: November 30, 2022 IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. **Policy Number:** 359 Palmetto Road West City State ZIP Code Company NAIC Number **Nokomis** Florida 34275 SECTION C - BUILDING ELEVATION INFORMATION (SURVEY REQUIRED) C1. Building elevations are based on:

Construction Drawings*

Building Under Construction* X Finished Construction *A new Elevation Certificate will be required when construction of the building is complete. C2. Elevations - Zones A1-A30, AE, AH, A (with BFE), VE, V1-V30, V (with BFE), AR, AR/A, AR/AE, AR/A1-A30, AR/AH, AR/AO. Complete Items C2.a-h below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters. Benchmark Utilized: NGS8725899C PID#DL9721 Vertical Datum: NAVD 1988 Indicate elevation datum used for the elevations in items a) through h) below. ☐ NGVD 1929 🔀 NAVD 1988 ☐ Other/Source: Datum used for building elevations must be the same as that used for the BFE. Check the measurement used. a) Top of bottom floor (including basement, crawlspace, or enclosure floor) 11.2 × feet meters b) Top of the next higher floor N/A feet ☐ meters c) Bottom of the lowest horizontal structural member (V Zones only) N/A ☐ feet meters d) Attached garage (top of slab) 8.0 X feet meters e) Lowest elevation of machinery or equipment servicing the building 11.4 X feet meters (Describe type of equipment and location in Comments) 7.9 X feet meters f) Lowest adjacent (finished) grade next to building (LAG) 9.1 g) Highest adjacent (finished) grade next to building (HAG) X feet meters h) Lowest adjacent grade at lowest elevation of deck or stairs, including structural support 8.7 X feet meters SECTION D - SURVEYOR, ENGINEER, OR ARCHITECT CERTIFICATION This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001, Were latitude and longitude in Section A provided by a licensed land surveyor? Yes \subseteq No Check here if attachments. Certifier's Name License Number Lawrence R. Weber **PSM 3868** Professional Surveyor & Mapper Company Name Weber Engineering & Surveying, Inc. Address 4596 Ashton Road City State ZIP Code Sarasota Florida 34233 Signature Telephone Date Ext. 1/13/12020 (941) 921-3914 Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner. Comments (including type of equipment and location, per C2(e), if applicable) A9.d - FLOOD FLAP FLOOD VENT MODEL FFNF08 RATED FOR 220 SF COVERAGE EACH C2.e - A/C RIGHT SIDE OF BUILDING C2.h - DECK A5 - LAT/LONG FROM FEMA INTERACTIVE MAP

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

	ing information from S	ection A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and 359 Palmetto Road West	/or Bldg. No.) or P.O. R	oute and Box No.	Policy Number:
Olb	, ,		
		P Code	Company NAIC Number
		1275	
SECTION E – BUILDING ELI FOR ZONE	EVATION INFORMAT E AO AND ZONE A (M	ION (SURVEY NOT /ITHOUT BFE)	REQUIRED)
For Zones AO and A (without BFE), complete items E1-complete Sections A, B,and C. For Items E1-E4, use netter meters.	E5. If the Certificate is atural grade, if available	intended to support a . Check the measure	LOMA or LOMR-F request, ment used. In Puerto Rico only,
E1. Provide elevation information for the following and the highest adjacent grade (HAG) and the lowest a	check the appropriate b djacent grade (LAG).	oxes to show whethe	r the elevation is above or below
Top of bottom floor (including basement, crawlspace, or enclosure) is			s 🔲 above or 🔲 below the HAG.
b) Top of bottom floor (including basement, crawlspace, or enclosure) is			_
·			
E2. For Building Diagrams 6–9 with permanent flood of the next higher floor (elevation C2.b in the diagrams) of the building is	enings provided in Sec	tion A Items 8 and/or	
E3. Attached garage (top of slab) is			
E4. Top of platform of machinery and/or equipment		<u> </u>	
servicing the building is	in the ten of the hetter		
E5. Zone AO only: If no flood depth number is available floodplain management ordinance? Yes	No Unknown. Ti	n noor elevated in ac he local official must (pertify this information in Section G.
SECTION F - PROPERTY OWN	ER (OR OWNER'S RE	PRESENTATIVE) CE	RTIFICATION
The property owner or owner's authorized representative community-issued BFE) or Zone AO must sign here. The	e who completes Section e statements in Section	ns A, B, and E for Zo s A, B, and E are con	ne A (without a FEMA-issued or rect to the best of my knowledge.
Property Owner or Owner's Authorized Representative's	Name		
Address	City	Sta	ite ZIP Code
Clanchus			
Signature	Date	Te	ephone
Comments	Date	Te	ephone
	Date	Те	ephone
	Date	Тө	ephone
	Date	Те	ephone

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.	FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Unit, Suite, and/or Bidg. No.) or P.O. Route and Bo 359 Palmetto Road West	Policy Number:	
City State ZIP Code Nokomis Florida 34275		Company NAIC Number
SECTION G - COMMUNITY INFORMATION (OPT	TONAL)	
The local official who is authorized by law or ordinance to administer the community's flood Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) used in Items G8–G10. In Puerto Rico only, enter meters.	iplain man) and sign	agement ordinance can complete below. Check the measurement
G1. The information in Section C was taken from other documentation that has been engineer, or architect who is authorized by law to certify elevation information. (In data in the Comments area below.)	signed and indicate the	d sealed by a licensed surveyor, source and date of the elevation
G2. A community official completed Section E for a building located in Zone A (without or Zone AO.	ut a FEMA	-issued or community-issued BFE)
G3. The following information (Items G4–G10) is provided for community floodplain n	nanageme	nt purposes.
G4. Permit Number G5. Date Permit Issued		ate Certificate of ompliance/Occupancy Issued
G7. This permit has been issued for:	ement	
G8. Elevation of as-built lowest floor (including basement) of the building:	[] feet	meters Datum
G9. BFE or (in Zone AO) depth of flooding at the building site:	[] feet	meters Datum
G10. Community's design flood elevation:	l feet	meters Datum
Local Official's Name Title		
Community Name Telephone		
Signature Date	<u> </u>	
Comments (including type of equipment and location, per C2(e), if applicable)		à
		ш
		ē.
		☐ Check here if attachments.

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

			- Philadell Date: 140 fellibel Ou, 2022	
IMPORTANT: In these spaces, co	py the corresponding information	on from Section A.	FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 359 Palmetto Road West			Policy Number:	
City Nokomis	State Florida	ZIP Code 34275	Company NAIC Number	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

Photo One Caption Front View

Clear Photo One

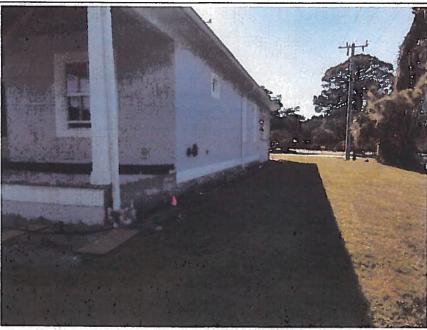


Photo Two

Photo Two Caption Right Side View

Clear Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 359 Palmetto Road West			FOR INSURANCE COMPANY USE Policy Number:	
Nokomis	Florida	34275		

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.

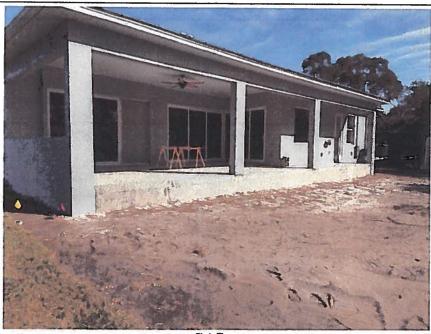


Photo Three

Photo Three Caption Rear View

Clear Photo Three



Photo Four

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 359 Palmetto Road West			FOR INSURANCE COMPANY USE Policy Number:	
Nokomis	Florida	34275		

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.

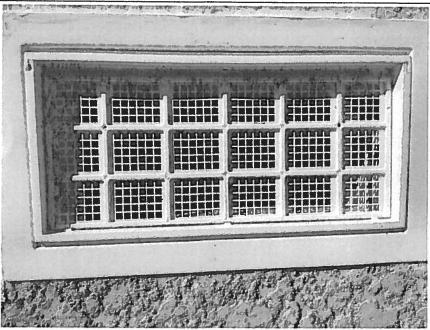


Photo One

Photo One Caption Front View

Clear Photo One

Photo Two



ICC-ES Evaluation Report

ESR-3560

Reissued September 2020

This report is subject to renewal September 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC

EVALUATION SUBJECT:

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012 and 2009 International Building Code[®] (IBC)
- 2018, 2015, 2012 and 2009 International Residential Code® (IRC)

Properties evaluated:

- Physical operation
- Water flow
- Weathering

2.0 USES

Flood Flaps® automatic flood vents are used to provide for the equalization of hydrostatic flood forces on exterior walls. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

Flood Flaps® automatic flood vents are engineered mechanically operated flood vents (FVs) that automatically allow flood waters to enter and exit enclosed areas. The FVs are constructed of ABS plastic which serves as the FV's housing, and a front grill that contains an anodized metal screen imbedded in polypropylene plastic. On contact with rising flood water, the grill will disengage from its secured position, allowing flood water and debris to flow through in either direction. The FVs are available in two series as described in Section 3.3.

The sealed series models contain two rubber flaps that close the FV to the passage of air when using with conditioned areas or sealed crawl spaces. In the same manner as the grill, the two rubber flaps are pushed open

by water pressure, allowing water and debris to flow through the FV in either direction. See Figure 1 for an illustration of the Flood Flaps® automatic FV.

3.2 Engineered Opening:

The Flood Flaps® automatic FVs comply with the design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 (2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/SEI 24-05 (2012 and 2009 IBC and IRC)] for a rate of rise and fall of 5 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Flood Flaps® automatic FVs must be installed in accordance with Section 4.0.

3.3 Flood Vent Series Models:

Flood Flaps® automatic FVs are available in two series with multiple models and sizes as described in Table 1. The sealed series models, designated FFWF, include two rubber flaps for the prevention of air flow. The multipurpose series, designated FFNF, omits the rubber flaps.

3.4 Natural Ventilation:

Flood Flaps® automatic FV models FFNF12, FFNF08, FFNF05, and FFNF02 have metal screens with 1/4 inch by 1/4 inch (6 mm by 6 mm) openings and provide 37 square inches (0.02 m2) of net free opening to supply natural ventilation for under-floor ventilation. Flood Flaps® automatic FV models FFWF12, FFWF08, and FFWF05 have not been evaluated for use as openings for under-floor ventilation.

4.0 DESIGN AND INSTALLATION

Flood Flaps® automatic FVs are designed to be installed into walls of existing or new construction. Installation of the FVs must be in accordance with the manufacturer's instructions, the applicable code and this report. Flood Flaps® automatic FVs can be installed in wood, masonry and concrete walls up to a thickness of 12 inches (305 mm). In order to comply with the engineered opening design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 (2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/SEI 24-05 (2012 and 2009 IBC and IRC)], the Flood Flaps® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 220 square feet (20 m²) of enclosed area.



- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305 mm) above grade.

5.0 CONDITIONS OF USE

The Flood Flaps® automatic flood vents described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The Flood Flaps® automatic FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- 5.2 The Flood Flaps® automatic FVs must not be used in place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).

7.0 IDENTIFICATION

- 7.1 The Flood Flaps® models recognized in this report are identified by a label bearing the manufacturer's name, the model number, and the evaluation report number (ESR-3560).
- 7.2 The report holder's contact information is the following:

FLOOD FLAPS®, LLC
POST OFFICE BOX 1003
ISLE OF PALMS, SOUTH CAROLINA 29451
(843) 881-0190
www.floodflaps.com
info@floodflaps.com

TABLE 1-FLOOD FLAP AUTOMATIC FLOOD VENT MODEL SIZES

MODEL NUMBER	MODEL DESIGNATION	ROUGH OPENING (Width X Height) (inches)	VENT SIZE (W X H X D) (inches)	ENCLOSED AREA COVERAGE (ft²)	NET FREE AREA OPENING ¹ (In ²)
FFWF12	Sealed Series	16 x 8	15 ⁵ / ₈ X 7 ³ / ₄ X 12	220	NA NA
FFNF12	Multi-Purpose	16 x 8	155/ ₈ X 73/ ₄ X 12	220	37
FFWF08	Sealed Series	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 8	220	NA
FFNF08	Multi-Purpose	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 8	220	37
FFWF05	Sealed Series	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 5	220	NA
FFNF05	Multi-Purpose	16 x 8	15 ⁵ / ₈ x 7 ³ / ₄ x 5	220	37

For St: 1 inch = 25.4 mm; 1 f^2 = 0.093 m^2

¹For under-floor ventilation only.




FIGURE 1—FLOOD FLAPS® AUTOMATIC FLOOD VENT

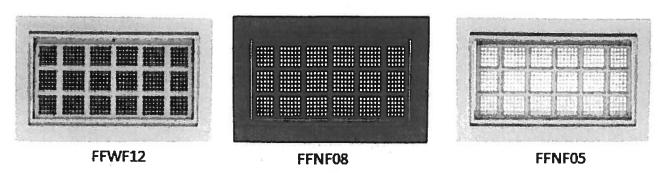


FIGURE 2—FLOOD FLAPS® AUTOMATIC FLOOD VENT SERIES MODELS

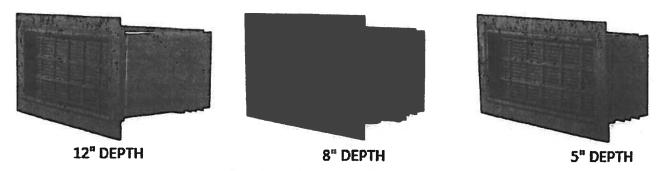


FIGURE 3—FLOOD FLAPS® AUTOMATIC FLOOD VENTS MULTIPLE DEPTH OFFERINGS



ICC-ES Evaluation Report

ESR-3560 CBC and CRC Supplement

Issued September 2020

This report is subject to renewal September 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 88—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC

EVALUATION SUBJECT:

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Flood Flaps® automatic flood vents, described in ICC-ES evaluation report ESR-3560, has also been evaluated for compliance with the code(s) noted below.

Applicable code edition(s):

- 2019 California Building Code (CBC)
- 2019 California Residential Code (CRC)

For evaluation of applicable chapters adopted by the California Office of Statewide Health Planning and Development (OSHPD) and Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

2.0 CONCLUSIONS

2.1 CBC:

The Flood Flaps® automatic flood vents, described in Sections 2.0 through 7.0 of the evaluation report <u>ESR-3560</u>, comply with CBC Chapter 12, provided the design and installation are in accordance with the 2018 *International Building Code*® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

- 2.1.1 OSHPD: The applicable OSHPD Sections of the CBC are beyond the scope of this supplement.
- 2.1.2 DSA: The applicable DSA Sections of the CBC are beyond the scope of this supplement.

2.2 CRC:

The Flood Flaps® automatic flood vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-3560, comply with 2019 CRC, provided the design and installation are in accordance with the 2018 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report reissued September 2020.





ICC-ES Evaluation Report

ESR-3560 FBC Supplement

Reissued September 2020

This report is subject to renewal September 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC

EVALUATION SUBJECT:

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Flood Flaps® automatic flood vents, described in ICC-ES evaluation report ESR-3560, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

2.0 CONCLUSIONS

The Flood Flaps flood vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-3560, comply with the Florida Building Code-Building and the Florida Building Code-Residential, provided the design and installation are in accordance with the 2015 International Building Code® provisions noted in the evaluation report.

Use of the Flood Flaps flood vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality-assurance program is audited by a quality-assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official, when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued September 2020.

