# U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

# ELEVATION CERTIFICATE Important: Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFO	ORMATION			RANCE COMPANY USE
A1. Building Owner's Name JOHN JIRKOFSKY			Policy Num	
<ul> <li>A2. Building Street Address (including Apt., Unit, Suite, an Box No.</li> <li>8338 MIDNIGHT PASS ROAD</li> </ul>	d/or Bldg. No.) or P.O	. Route and	Company N	IAIC Number:
City SARASOTA	State Florida		ZIP Code 34242	
A3. Property Description (Lot and Block Numbers, Tax Par LOT 24, BLOCK B, OCEAN VIEW PID# 0128-07-0026	rcel Number, Legal De	escription, etc.)		
A4. Building Use (e.g., Residential, Non-Residential, Additi	ion, Accessory, etc.)	RESIDENTIAL		
A5. Latitude/Longitude: Lat. 27°13'46"N Long	<sub>J.</sub> 82°31'12"W	Horizontal Datum:	□ NAD 1	1927 X NAD 1983
A6. Attach at least 2 photographs of the building if the Cert	tificate is being used to	o obtain flood insurar	nce.	_
A7. Building Diagram Number1B				
A8. For a building with a crawlspace or enclosure(s):				
a) Square footage of crawlspace or enclosure(s)	0 sq ft			
b) Number of permanent flood openings in the crawlsp	ace or enclosure(s) w	ithin 1.0 foot above a	adjacent gra	ade0
c) Total net area of flood openings in A8.b0	_sq in			
d) Engineered flood openings?				
A9. For a building with an attached garage:				
a) Square footage of attached garage588	_ sq ft			
b) Number of permanent flood openings in the attached	d garage within 1.0 foo	ot above adjacent gra	ade	6
c) Total net area of flood openings in A9.b 306	sq in			
d) Engineered flood openings?	<u> </u>			
SECTION B - FLOOD INSUR	RANCE RATE MAP	(FIRM) INFORMAT	ON	
B1. NFIP Community Name & Community Number SARASOTA 125144	B2. County Name SARASOTA			B3. State Florida
Number Date	FIRM Panel Effective/ Revised Date	B8. Flood Zone(s)	(Zon	e Flood Elevation(s) le AO, use Base
	04/2016	AE	11	d Depth)
B10. Indicate the source of the Base Flood Elevation (BFE)  FIS Profile  FIRM  Community Determined		pth entered in Item E	<b>39</b> :	
			· · · · · · · · · · · · · · · · · · ·	
B11. Indicate elevation datum used for BFE in Item B9:	NGVD 1929 ⊠ NA	VD 1988	r/Source: _	
B12. Is the building located in a Coastal Barrier Resources	System (CBRS) area	or Otherwise Protect	ed Area (O	PA)? ☐ Yes ☒ No
Designation Date: CBRS	□ OPA			

# **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding informat		FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No. 8338 MIDNIGHT PASS ROAD	) or P.O. Route and Box No.	Policy Number:
City State SARASOTA Florida	ZIP Code 34242	Company NAIC Number
SECTION C - BUILDING ELEVATION	INFORMATION (SURVEY R	EQUIRED)
<ul> <li>C1. Building elevations are based on: Construction Drawing *A new Elevation Certificate will be required when construction</li> <li>C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V.</li> <li>Complete Items C2 and below according to the building diagram</li> </ul>	of the building is complete.	AF AR/A1_A30 AR/AH AR/A0
Complete Items C2.a-h below according to the building diagrams.  Benchmark Utilized: SC BM 128A Ve	im specified in Item A7. In Puert rtical Datum: NGVD	o Rico only, enter meters.
Indicate elevation datum used for the elevations in items a) thr		17 E
☐ NGVD 1929 区 NAVD 1988 ☐ Other/Source:		
Datum used for building elevations must be the same as that u	sed for the BFE.	Charle the manner of
a) Top of bottom floor (including basement, crawlspace, or en	closure floor)11_1	Check the measurement used.  [X] feet [] meters
b) Top of the next higher floor	17 1	
c) Bottom of the lowest horizontal structural member (V Zones		X feet meters
d) Attached garage (top of slab)	7 22	X feet meters
		X feet meters
<ul> <li>e) Lowest elevation of machinery or equipment servicing the t (Describe type of equipment and location in Comments)</li> </ul>	ouilding <u>11</u> . <u>0</u>	X feet meters
f) Lowest adjacent (finished) grade next to building (LAG)	<u>4</u> . <u>8</u>	X feet  meters
g) Highest adjacent (finished) grade next to building (HAG)	9.4	x feet meters
<ul> <li>h) Lowest adjacent grade at lowest elevation of deck or stairs, structural support</li> </ul>	including <u>3</u> . 9	x feet meters
SECTION D - SURVEYOR, ENGINEE	R, OR ARCHITECT CERTIFI	CATION
This certification is to be signed and sealed by a land surveyor, eng I certify that the information on this Certificate represents my best en statement may be punishable by fine or imprisonment under 18 U.S.	fforts to interpret the data availa	law to certify elevation information. ble. I understand that any false
Were latitude and longitude in Section A provided by a licensed land	d surveyor? 🗵 Yes 🗌 No	Check here if attachments.
Certifier's Name License LAWRENCE R WEBER 3868	Number	6
Title		
PROFESSIONAL SURVEYOR & MAPPER		1/10-
Company Name WEBER ENGINEERING & SURVEYING, INC.		Place N
Address 4596 ASHTON ROAD		Here
City State Florida	ZIP Code 34233	30
Signature Date	Telephone (941) 921-3914	
Copy all pages of this Elevation Certificate and all attachments for (1) c	ommunity official, (2) insurance a	gent/company, and (3) building owner.
Comments (including type of equipment and location, per C2(e), if ap C2.e - A/C C2-h - DECK A9.b - Smart Vent 1540-520 engineered/rated for coverage of 200sq reissued 02/2015	. ,	per ICC-ES Report ESR-2074

# **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the con	responding information	on from Section A.		FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, S 8338 MIDNIGHT PASS ROAD		or P.O. Route and Bo		Policy Number:
City SARASOTA	State Florida	ZIP Code 34242	- 1	Company NAIC Number
SECTION E - BUILD	ING ELEVATION INF OR ZONE AO AND ZO	ORMATION (SUR) NE A (WITHOUT B	/EY NOT F SFE)	REQUIRED)
For Zones AO and A (without BFE), complete I complete Sections A, B,and C. For Items E1-E enter meters.	tems E1–E5. If the Cer 4, use natural grade, if	tificate is intended to available. Check the	support a l measurem	LOMA or LOMR-F request, ent used. In Puerto Rico only,
<ul> <li>E1. Provide elevation information for the follow the highest adjacent grade (HAG) and the</li> <li>a) Top of bottom floor (including basemer</li> </ul>	lowest adjacent drade	opriate boxes to sho (LAG).	w whether	the elevation is above or below
crawispace, or enclosure) is b) Top of bottom floor (including basemen			meters	above or below the HAG.
crawlspace, or enclosure) is  E2. For Building Diagrams 6–9 with permanent the part higher floor (elevation 63 his	t flood openings provide		meters	above or below the LAG.
the next higher floor (elevation C2.b in the diagrams) of the building is	. Hood openings provide		≅ and/or 9  ☐ meters	(see pages 1–2 of Instructions),  ☐ above or ☐ below the HAG.
E3. Attached garage (top of slab) is			meters	above or below the HAG.
E4. Top of platform of machinery and/or equipr servicing the building is	nent	feet	☐ meters	above or below the HAG.
E5. Zone AO only: If no flood depth number is floodplain management ordinance?	available, is the top of t	he hottom floor eleva	— ted in acco	rdance with the community to
SECTION F - PROPERT	TY OWNER (OR OWN	ER'S REPRESENTA	TIVE) CER	TIFICATION
The property owner or owner's authorized repre community-issued BFE) or Zone AO must sign l	sentative who complete	e Sections A. B. and	E for Zone	A (without a FFRRA in
Property Owner or Owner's Authorized Represe				to the bost of my knowledge.
Address		City	State	ZIP Code
Signature		Date	Teler	phone
Comments			100	
Comments				
				ii.
				Check here if attachments.

# **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corr	esponding information fr	om Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, S 8338 MIDNIGHT PASS ROAD	uite, and/or Bldg. No.) or P	O. Route and Box No.	Policy Number:
City SARASOTA	State Florida	ZIP Code 34242	Company NAIC Number
SECTION	ON G - COMMUNITY INFO	RMATION (OPTIONAL)	
The local official who is authorized by law or or Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, en	Certificate. Complete the a	community's floodplain mapplicable item(s) and sig	anagement ordinance can complete in below. Check the measurement
G1. The information in Section C was take engineer, or architect who is authoriz data in the Comments area below.)	en from other documentation ed by law to certify elevation	on that has been signed an information. (Indicate the	and sealed by a licensed surveyor, he source and date of the elevation
G2. A community official completed Section Zone AO.	on E for a building located	in Zone A (without a FEN	IA-issued or community-issued BFE)
G3. The following information (Items G4-	G10) is provided for commo	unity floodplain managen	nent purposes.
G4. Permit Number	G5. Date Permit Issued		Date Certificate of Compliance/Occupancy Issued
G7. This permit has been issued for:	New Construction  Sub	ostantial Improvement	
G8. Elevation of as-built lowest floor (including of the building:	•		t  meters Datum
G9. BFE or (in Zone AO) depth of flooding at ti	he building site:	feet	t  meters Datum
G10. Community's design flood elevation:	-		meters Datum
Local Official's Name	Titl		
Community Name	Tel	ephone	
Signature	Da	te	
Comments (including type of equipment and local	ation, per C2(e), if applicab	le)	
			Charle bare if - West-west-
			☐ Check here if attachments.

## **BUILDING PHOTOGRAPHS**

## **ELEVATION CERTIFICATE**

See Instructions for Item A6.

OMB No. 1660-0008

Expiration Date: November 30, 2018

IMPORTANT: In these spaces, co	py the corresponding informati	on from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including 8338 MIDNIGHT PASS ROAD	Apt., Unit, Suite, and/or Bldg. No.)	or P.O. Route and Box No.	Policy Number:
City SARASOTA	State Florida	ZIP Code 34242	Company NAIC Number

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

### Photo One Caption FRONT VIEW 9/14/16



Photo Two

Photo Two Caption REAR VIEW 9/14/16

### **BUILDING PHOTOGRAPHS**

## **ELEVATION CERTIFICATE**

**Continuation Page** 

OMB No. 1660-0008

Expiration Date: November 30, 2018

			7
IMPORTANT: In these spaces, co	py the corresponding information	on from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 8338 MIDNIGHT PASS ROAD		Policy Number:	
City SARASOTA	State Florida	ZIP Code 34242	Company NAIC Number

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo One

Photo One Caption RIGHT SIDE VIEW 9/14/16



Photo Two

Photo Two Caption LEFT SIDE VIEW 9/14/16



Most Widely Accepted and Trusted

# **ICC-ES** Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2015 This report is subject to renewal 02/2017.

DIVISION: 08 00 00—OPENINGS
SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

#### REPORT HOLDER:

## **SMARTVENT PRODUCTS, INC.**

430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



A Subsidiary of

ICG-ES Evaluation-Reports-are not to be construed as representing-aesthetics-or-any other-attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.







# **ICC-ES Evaluation Report**

#### ESR-2074\*

Reissued February 2015

This report is subject to renewal February 2017.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

#### REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

#### 1.0 EVALUATION SCOPE

#### Compliance with the following codes:

- 2012, 2009 and 2006 International Building Code® (IBC)
- 2012, 2009 and 2006 International Residential Code® (IRC)
- 2013 Abu Dhabi International Building Code (ADIBC)<sup>†</sup>

<sup>1</sup>The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

#### Properties evaluated:

- Physical operation
- Water flow

#### 2.0 USES

The Smart Vent<sup>®</sup> units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

#### 3.0 DESCRIPTION

#### 3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow.

The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

#### 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.6.2.2 of ASCE/SEI 24 for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

#### 3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 808 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

#### 4.0 DESIGN AND INSTALLATION

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. The mounting straps allow mounting in masonry and concrete walls up to 12 inches (305 mm) thick. In order to comply with the engineered opening design principle noted in Section 2.6.2.2 of ASCE/SEI 24, the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final

\*Revised July 2015

grade or floor and finished exterior grade immediately under each opening.

#### 5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but

are permitted for use in conjunction with breakaway walls in other areas.

## 6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated October 2013 (editorially revised May 2014).

#### 7.0 IDENTIFICATION

The Smart VENT® models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT®	1540-510	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
FloodVENT® Overhead Door	1540-524	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Overhead Door	1540-514	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT®	1540-570	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m2

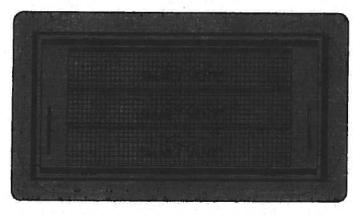


FIGURE 1-SMART VENT: MODEL 1540-510

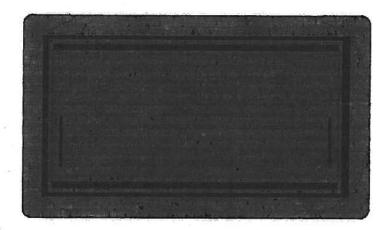


FIGURE 2—SMART VENT MODEL 1540-520

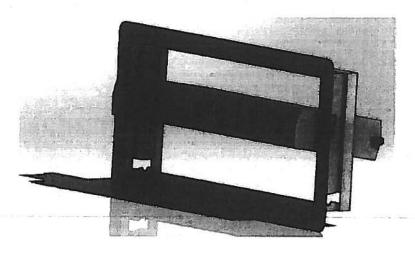


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN



# **ICC-ES Evaluation Report**

## **ESR-2074 FBC Supplement\***

Reissued February 2015

This report is subject to renewal February 2017.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

#### REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master report ESR-2074, have also been evaluated for compliance with the codes noted below.

#### Applicable code editions:

- 2014 Florida Building Code—Building (FBC)
- 2014 Florida Building Code—Residential (FRC)

#### 2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the FBC and the FRC, provided the design and installation are in accordance with the International Building Code® provisions noted in the master report.

Use of the Smart Vent<sup>®</sup> Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the FBC and the FRC.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the master report, reissued February 2015 and revised July 2015.

\*Revised July 2015

