U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

Policy Number: Company NAIC N ZIP Code 34242 n: NAD 1927 ance.		
ZIP Code 34242 n: NAD 1927		
34242 n: NAD 1927		
_ .	THE NAME (CO.)	
_ .	Ed NAD 1000	
_ .	EE MAD 1000	
ance.	(X) NAU 1983	
adjacent grade	0	
-		
arada	5	
TION		
B3. Flor	State rida	
(Zone AC	ood Elevation(s) O, use Base	
10	od Deptily	
n B9:		
:her/Source:		
ected Area (OPA)	? ☐ Yes ☒ No	
9 t	Flor B9. Base Flo (Zone AC Flood De	

OMB No. 1660-0008 **ELEVATION CERTIFICATE** Expiration Date: November 30, 2018 IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. Policy Number: 8325 Midnight Pass Rd. ZIP Code Company NAIC Number City State 34242 Sarasota Florida SECTION C - BUILDING ELEVATION INFORMATION (SURVEY REQUIRED) Construction Drawings* Building Under Construction* X Finished Construction C1. Building elevations are based on: *A new Elevation Certificate will be required when construction of the building is complete. C2. Elevations - Zones A1-A30, AE, AH, A (with BFE), VE, V1-V30, V (with BFE), AR, AR/A, AR/AE, AR/A1-A30, AR/AH, AR/AO. Complete Items C2.a-h below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters. Benchmark Utilized: BM 872 5985 G Tidal Vertical Datum: 6.23 Indicate elevation datum used for the elevations in items a) through h) below. NGVD 1929 X NAVD 1988 Other/Source: Datum used for building elevations must be the same as that used for the BFE. Check the measurement used. 11.5 a) Top of bottom floor (including basement, crawlspace, or enclosure floor) _ X feet ☐ meters N/A b) Top of the next higher floor |X| feet ☐ meters 18 5 c) Bottom of the lowest horizontal structural member (V Zones only) x feet meters <u>6. 5</u> |X | feet meters d) Attached garage (top of slab) 10 5 e) Lowest elevation of machinery or equipment servicing the building |X | feet meters (Describe type of equipment and location in Comments) 5, 8 x feet f) Lowest adjacent (finished) grade next to building (LAG) meters 6, 3 g) Highest adjacent (finished) grade next to building (HAG) x feet meters 6.0 h) Lowest adjacent grade at lowest elevation of deck or stairs, including x feet meters | structural support SECTION D - SURVEYOR, ENGINEER, OR ARCHITECT CERTIFICATION This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001. Were latitude and longitude in Section A provided by a licensed land surveyor?

Yes
No Check here if attachments. Certifier's Name License Number LS 5701 James Burchett Title President Company Name Sampey, Burchett and Knight, Inc. Address 1570 Global Court ZIP Code State City 34240 Florida Sarasota Date Telephone Signature (941) 342-0349 09/22/2017 Acutary Clarent Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner. Comments (including type of equipment and location, per C2(e), if applicable) C2.e) Air Conditioner - North side of Residence A9.d) 5 Flood Vents, FFWF08 220 Square inches per vent for a total of 1100 square inches

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the correspo	nding information fro	om Section A.	FOR INSURANC	E COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 8325 Midnight Pass Rd.			Policy Number:	
City Sarasota	State Florida	ZIP Code 34242	Company NAIC N	lumber
SECTION E – BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE)				
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters.				
E1. Provide elevation information for the following a the highest adjacent grade (HAG) and the lowe a) Top of bottom floor (including basement,	and check the appropri st adjacent grade (LA	ate boxes to show wheth G).	ner the elevation is a	oove or below
crawlspace, or enclosure) is b) Top of bottom floor (including basement,		feet met	ers	below the HAG.
crawlspace, or enclosure) is E2. For Building Diagrams 6–9 with permanent floo	d ananinga provided ir	feet met		below the LAG.
the next higher floor (elevation C2.b in the diagrams) of the building is	a openings provided in			below the HAG.
E3. Attached garage (top of slab) is		feet met	ers 🗌 above or [below the HAG.
E4. Top of platform of machinery and/or equipment servicing the building is		feet met	ers above or [below the HAG.
E5. Zone AO only: If no flood depth number is avail floodplain management ordinance? Yes		oottom floor elevated in a n. The local official mus		
SECTION F - PROPERTY O	WNER (OR OWNER'	S REPRESENTATIVE)	CERTIFICATION	
The property owner or owner's authorized represent community-issued BFE) or Zone AO must sign here	tative who completes S . The statements in Se	Sections A, B, and E for a ections A, B, and E are c	Zone A (without a FE orrect to the best of r	MA-issued or ny knowledge.
Property Owner or Owner's Authorized Representati	ive's Name	- , ₁₁ ,		
Address	Cit	y	State	ZIP Code
Signature	Da	te	Telephone	
Comments				
# g				9
2				
			Check he	ere if attachments.

ELEVATION CERTIFICATE

OMB No. 1660-0008

Expiration Date: November 30, 2018 IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. Policy Number: 8325 Midnight Pass Rd. City State ZIP Code Company NAIC Number 34242 Sarasota Florida SECTION G - COMMUNITY INFORMATION (OPTIONAL) The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8-G10. In Puerto Rico only, enter meters. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.) G2. A community official completed Section E for a building located in Zone A (without a FEMA-issued or community-issued BFE) or Zone AO. G3. The following information (Items G4–G10) is provided for community floodplain management purposes. G4. Permit Number G5. Date Permit Issued G6. Date Certificate of Compliance/Occupancy Issued 122973 BI 00 G7. This permit has been issued for: G8. Elevation of as-built lowest floor (including basement) ☐ feet ☐ meters Datum of the building: feet meters Datum G9. BFE or (in Zone AO) depth of flooding at the building site: feet meters Datum G10. Community's design flood elevation: Title Local Official's Name Telephone **Community Name** Date Signature Comments (including type of equipment and location, per C2(e), if applicable) Check here if attachments.

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces,	FOR INSURANCE COMPANY USE		
Building Street Address (including 8325 Midnight Pass Rd.	Policy Number:		
City	State	ZIP Code	Company NAIC Number
Sarasota	Florida	34242	·

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One Caption

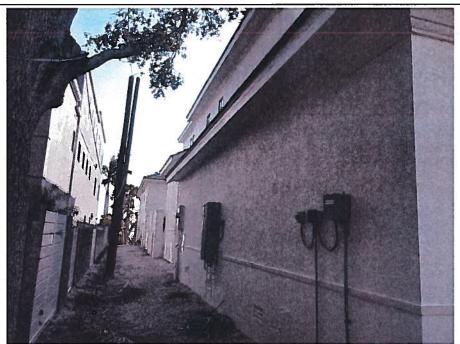


Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 8325 Midnight Pass Rd.			FOR INSURANCE COMPANY USE Policy Number:	
Sarasota	Florida	34242		

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo One

Photo One Caption



Photo Two Caption



ICC-ES Evaluation Report

ESR-3560

Reissued September 2015

This report is subject to renewal September 2017.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC 2707 WATERPOINTE CIRCLE MT. PLEASANT, SOUTH CAROLINA 29466 (843) 849-8031

www.floodflaps.com info@floodflaps.com

EVALUATION SUBJECT:

FLOOD FLAPS® FLOOD VENTS: MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2012 and 2009 International Building Code® (IBC)
- 2012 and 2009 International Residential Code® (IRC)

Properties evaluated:

- Physical operation
- Water flow
- Weathering

2.0 USES

Flood Flaps[®] are used to provide for the equalization of hydrostatic flood forces on exterior walls.

3.0 DESCRIPTION

3.1 General:

Flood Flaps® flood vents are engineered mechanically operated flood vents (FVs) that automatically allow flood waters to enter and exit enclosed areas. The FVs are constructed of ABS plastic which serves as the FV's housing, and a front grill that contains an anodized metal screen imbedded in polypropylene plastic. On contact with rising flood water, the grill will disengage from its secured position, allowing flood water and debris to flow through in either direction.

The sealed series models contain two rubber flaps that close the FV to the passage of air when using with conditioned areas or sealed crawl spaces. In the same manner as the grill, the two rubber flaps are pushed open by water pressure, allowing water and debris to flow

through the FV in either direction. See Figure 1 for an illustration of the Flood Flaps[®] FV.

3.2 Engineered Opening:

The Flood Flaps® FVs comply with the design principle noted in Section 2.6.2.2 of ASCE/SEI 24 for a rate of rise and fall of 5 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Flood Flaps® FVs must be installed in accordance with Section 4.0.

3.3 Model Sizes:

The Flood Flaps® FV model designations and sizes are as follows:

MODEL	WIDTH (in)	HIGHT (in)	DEPTH (in)
FFWF12 FFNF12	15 ⁵ /8	7 ³ / ₄	12
FFWF08 FFNF08	15 ⁵ /8	7 ³ / ₄	8
FFWF05 FFNF05	15 ⁵ /8	7 ³ / ₄	5

For **SI**: 1 inch = 25.4 mm.

The FFWF series include two rubber flaps for the prevention of air flow. The FFNF series omit the rubber flaps.

3.4 Ventilation:

Flood Flaps® FV models FFNF12, FFNF08, FFNF05, and FFNF02 have metal screens with \$^{1}_{4}\$ inch by \$^{1}_{4}\$ inch (6 mm by 6 mm) openings and provide 37 square inches of net free opening to supply natural ventilation for under-floor ventilation. Flood Flaps® FV models FFWF12, FFWF08, and FFWF05 have not been evaluated for use as openings for under-floor ventilation.

4.0 DESIGN AND INSTALLATION

Flood Flaps® FVs are designed to be installed into walls of existing or new construction. Installation of the FVs must be in accordance with the manufacturer's instructions, the applicable code and this report. Flood Flaps® FVs can be installed in wood, masonry and concrete walls up to a thickness of 12 inches (305 mm). In order to comply with the engineered opening design principle noted in Section 2.6.2.2 of ASCE/SEI 24, the Flood Flaps® FVs must be installed as follows:

With a minimum of two openings on different sides of each enclosed area.

- With a minimum of one FV for every 220 square feet (20 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305 mm) above grade.

5.0 CONDITIONS OF USE

The Flood Flaps[®] flood vents described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Flood Flaps® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.

5.2 The Flood Flaps® FVs must not be used in place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated October 2013.

7.0 IDENTIFICATION

The Flood Flaps models recognized in this report are identified by a label bearing the manufacturer's name, the model number, and the evaluation report number (ESR-3560).

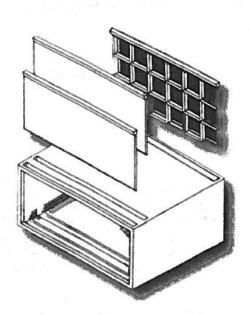


FIGURE 1—FLOOD FLAPS® FLOOD VENT