


STANDARD VALVE PIT ORIENTATION
N.T.S.
AIRVAC[®] VACUUM DETAIL
STANDARD DETAIL NO. VP-2

JULY 2011

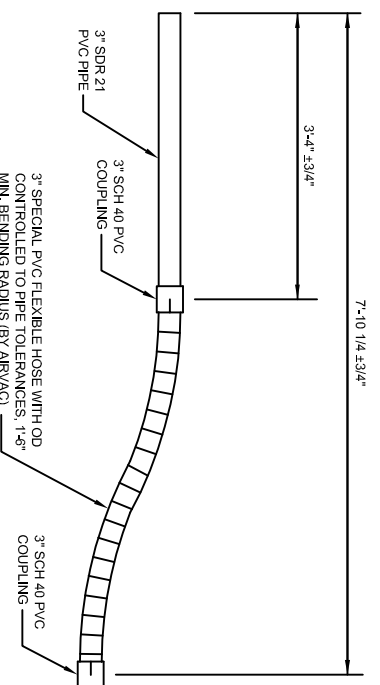

STANDARD VALVE PIT ORIENTATION
N.T.S.
AIRVAC[®] VACUUM DETAIL
STANDARD DETAIL NO. VP-2

JULY 2011

- INITIAL INSTALLATION - TO INSURE PROPER ALIGNMENT**
1. FLEXIBLE CONNECTOR LENGTH MAY NOT BE ALTERED, DO NOT CUT PVC PIPE OR THE FLEXIBLE HOSE.
 2. INSERT BEVELED END INTO THE ALIGNMENT PORT ON THE VALVE PIT. PUSH FLEXIBLE CONNECTOR ALL THE WAY TO THE 3" SUCTION ELBOW IN THE VALVE PIT.
 3. TO INSURE PROPER ALIGNMENT, CONNECT THE BEVELED END TO THE 3" SUCTION ELBOW USING A TEMPORARY SLIP COUPLING. DO NOT GLUE THIS COUPLING.


SEE AIRVAC INSTALLATION INSTRUCTIONS FOR ADDITIONAL DETAILS

AIRVAC FLEXIBLE CONNECTOR
N.T.S.
AIRVAC[®] VACUUM DETAIL
STANDARD DETAIL NO. VP-10

AIRVAC[®]
VACUUM DETAIL

NO CONSIGNATION OF THE RECEIPT OF THIS DOCUMENT, THE REQUIREMENTS NOT TO REPRODUCE OR TO USE OR TRANSMIT THIS DOCUMENT AND/OR THE INFORMATION THEREIN CONTAINED IN WHOLE OR IN PART OR TO SUFFER SUCH ACTION BY OTHER, FOR ANY PURPOSE EXCEPT WITH THE WRITTEN PERMISSION OF AIRVAC, INC. AND FURTHER AGREES TO SURRENDER SAME TO AIRVAC, INC. UPON DEMAND.

NO.	REVISIONS	DATE
1	REVISED FLEX CONN. DETAIL	11-04-09

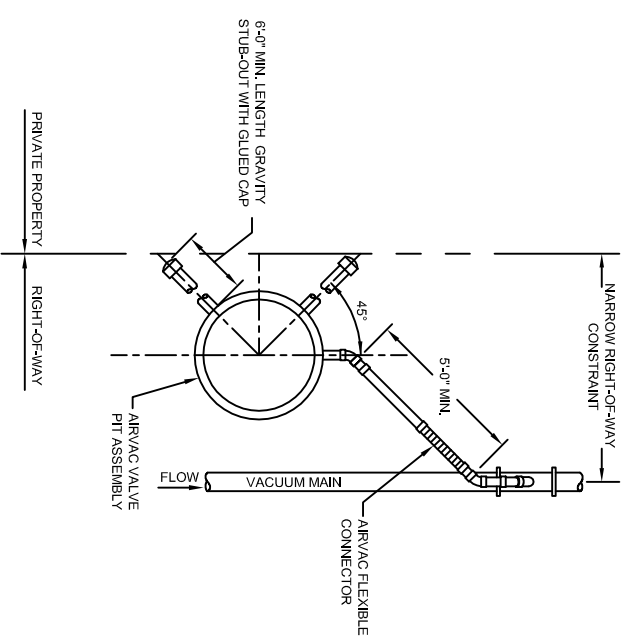

VALVE PIT IN NARROW RIGHT-OF-WAY
N.T.S.
AIRVAC[®] VACUUM DETAIL
STANDARD DETAIL NO. VP-8

JULY 2011

FUTURE DETAIL
N.T.S.
AIRVAC[®] VACUUM DETAIL
STANDARD DETAIL NO. VP-11

FUTURE DETAIL
N.T.S.
AIRVAC[®] VACUUM DETAIL
STANDARD DETAIL NO. VP-12

VALVE PIT DETAILS (2) - 1 PIECE PITTS

TITLE

SHEET NO.

SD-2